

Image not found or type unknown



Ref. No.:
829-07231705

Overview and Technical Data:

URPE - CFA 330 T Die casting machine

[URPE](#)



Year of Build:
Jan 2007

Description:

Used URPE CFA 330 tons of die casting machine

- Clamping force 330 tons
- Year of construction: 2007
- Dimensions: 6000 mm x 2000 mm x 3200
- Weight: 15,000 kg

Equipment:

- Control box: 1500 mm x 800 mm x 1700 mm
- Platform: 2000 mm x 1500 mm x 300 mm

Technical Data:

- closing force 3300 kN
- closing the path: 510 mm
- the force of the ejector 181 kN
- ejector stroke: 120 mm
- height of the mold (min-max): 300/700 mm
- panel dimensions: 910 x 910 mm
- distance between columns 572 x 572 mm
- diameter of the column: 115 mm
- the position of injection: 0-80-160 mm
- maximum casting: 155-350 kN
- injection piston diameter: 50-60-70-80 mm
- feed rate: 445 mm

Technical Data:

Technical Data:

Control:

[CNC](#)

Dimensions and Weight:

Height:

1.700 mm

Length:

2.000 mm

Width:

1.500 mm

Weight:

15.000 kg

Buyer Information:

Condition:

[Very good condition](#)

Available:

[On Request](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Location:

Germany

Images:



1





URPE

ALUMINUM AL

EXTRACTOR E-1

Emergency stop button (red)

Green button

Black button

Red button


Green button

Green button

3



4

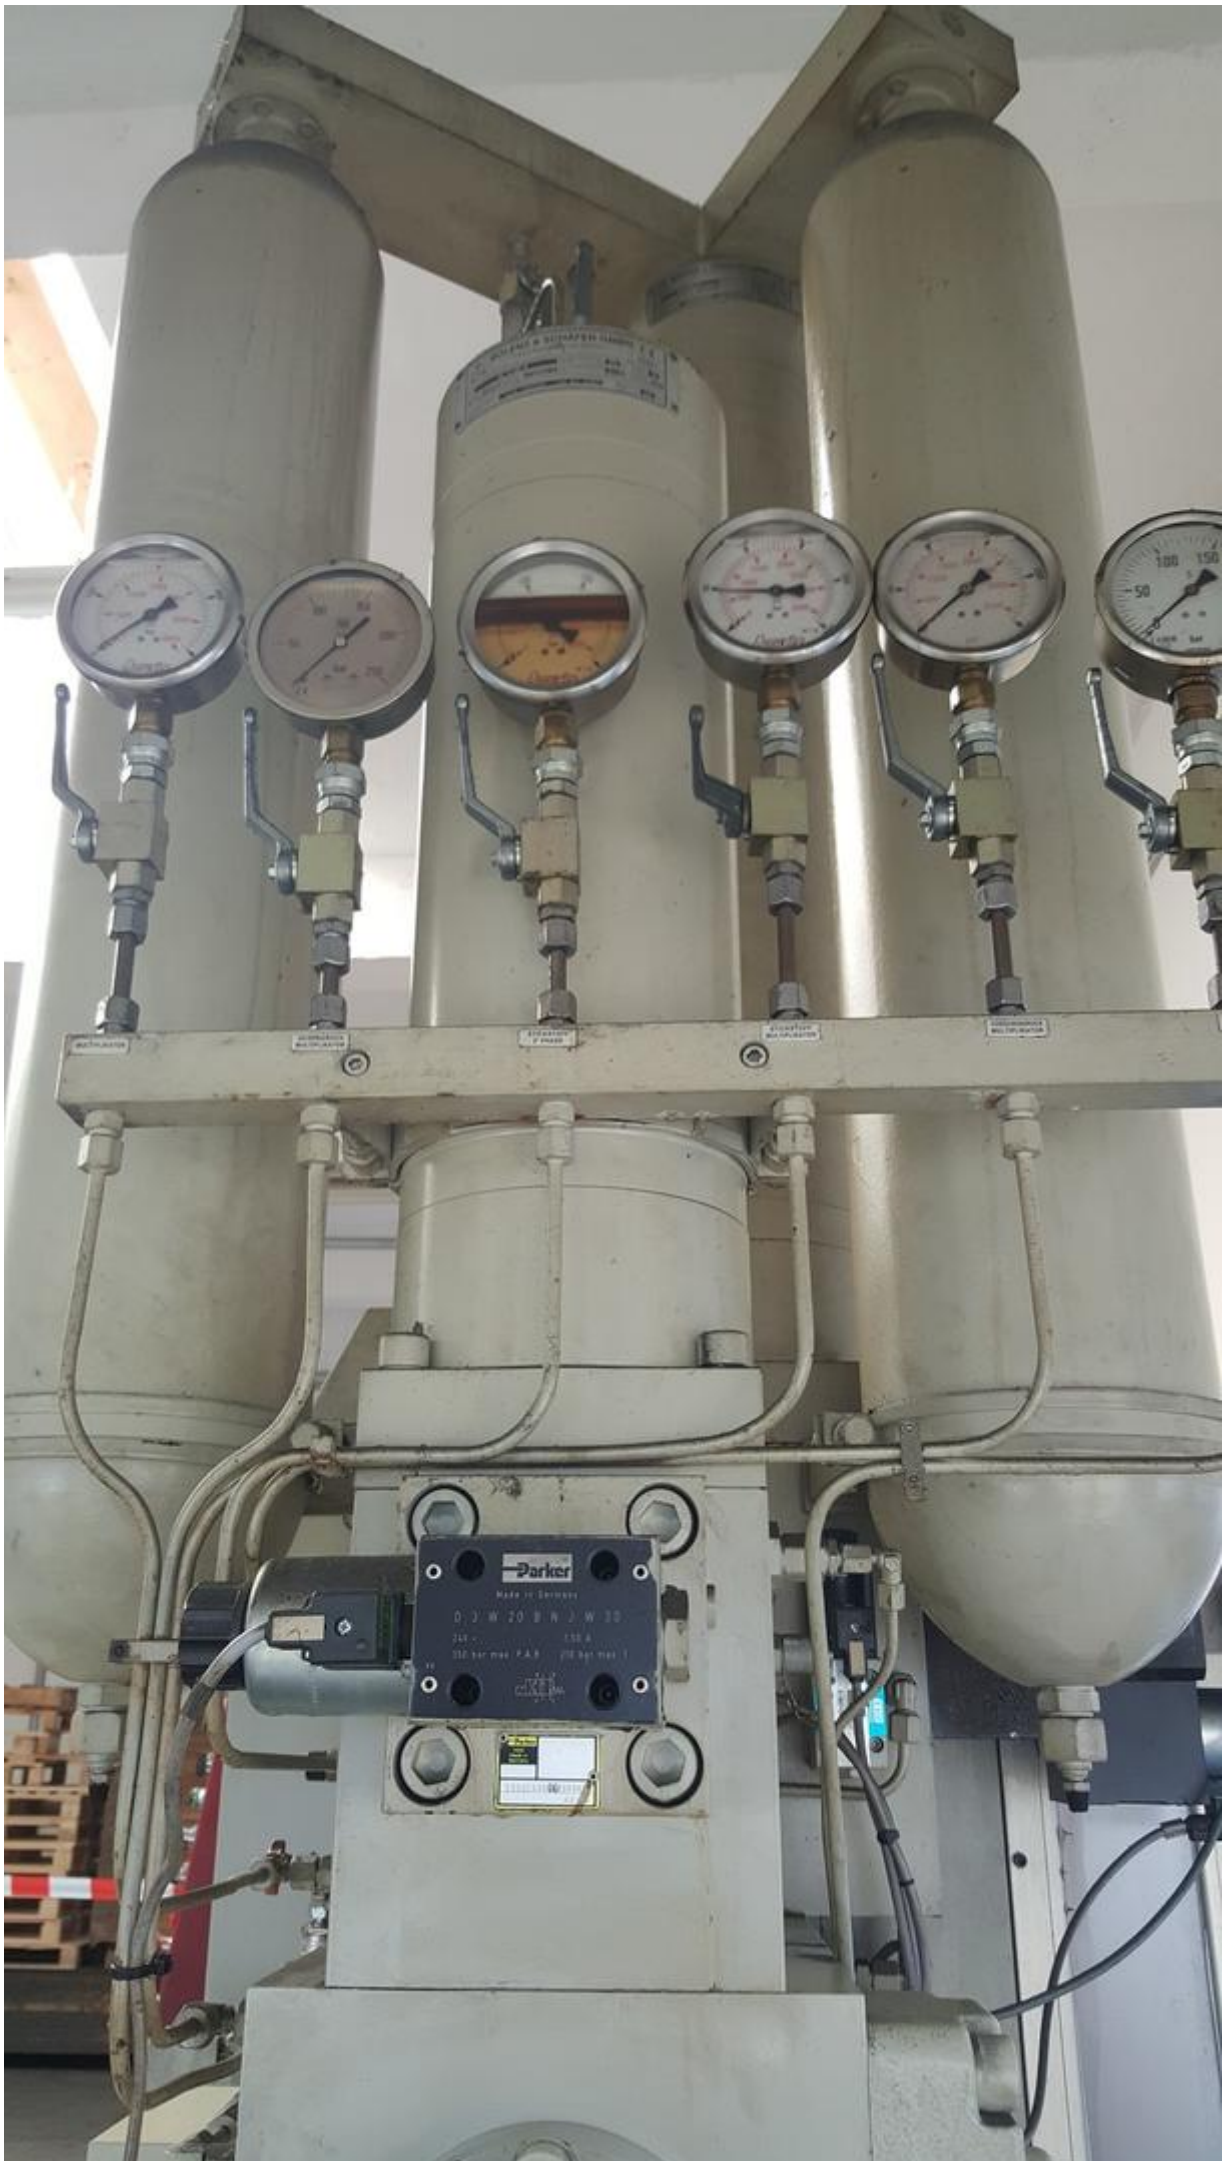



BOLENZ & SCHAFER GMBH
D 35216 Biedenkopf / Lahn (Germany)

AK 01-375-10
Serial No. 6270005983/6

zul. Betriebsdruck PS. 375 bar
MAWP:

zul. Betriebstemperatur 40/40 °C
TS:

I test date: 5.03.07

AK N. 338072043

Product pt. MAPP
50

URPEMAK S.L.

BASUSTABIDEA, 2 - Apdo.18 - 20750
ZUMAIA - GIPUZKOA - ESPAÑA
Tels. 943 860 662 / 66 - 943 860 891
Fax. 943 862 057 - 943 143 450
Telex 36039



MODELO
REF. Y Nº de FABRICACION
AÑO DE FABRICACION
PESO Tn POTENCIA KW



This engine was
conceived and is planned
to work with non-inflammable
fluids

HOUGHTO-SAFE 620

DON'T ADD MINERAL OIL

Manufacturer
HOUGHTON IBERICA

Poligono Ind. "Can Salvassella" TORRE MATEU - Avda. Aragona, 73-75
08210 BARBERA DEL VALLES (Barcelona)
Tel. 93 718 85 00 - Fax 93 718 93 00



MAX
MIN

URPE

BAR	Fza. CIERRE Tm	
100	400	●
90	375	●
80	350	●
70	320	●
		●



ABB Motors CE

3~ Motor M3AA 180 LB-4 H0

No. 74218 002 002

Ins. cl. F IP55

V	Hz	kW	r/min	A	cos φ	I _A /I _N	t _E /s
690Y	50	30,00	1465	32,50	0,84		
400D	50	30,00	1465	56,00	0,84		
660Y	50	30,00	1465	33,50	0,85		
380D	50	30,00	1465	58,00	0,85		
415D	50	30,00	1470	55,00	0,82		
440D	60	35,00	1765	58,00	0,85		

Prod. code 3GAA182103-ADD

IM1001

6310-2Z/C3 6209-2Z/C3 161,00 Xc

IEC 60034-1





MG
07/03/2022



URPE



URPE





URPE

URPE



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Ref. No.:
829-07231705

Overview and Technical Data:

URPE - CFA 330 T Die casting machine

[URPE](#)



Year of Build:
Jan 2007

Description:

Used URPE CFA 330 tons of die casting machine

- Clamping force 330 tons
- Year of construction: 2007
- Dimensions: 6000 mm x 2000 mm x 3200
- Weight: 15,000 kg

Equipment:

- Control box: 1500 mm x 800 mm x 1700 mm
- Platform: 2000 mm x 1500 mm x 300 mm

Technical Data:

- closing force 3300 kN
- closing the path: 510 mm

- the force of the ejector 181 kN
- ejector stroke: 120 mm
- height of the mold (min-max): 300/700 mm
- panel dimensions: 910 x 910 mm
- distance between columns 572 x 572 mm
- diameter of the column: 115 mm
- the position of injection: 0-80-160 mm
- maximum casting: 155-350 kN
- injection piston diameter: 50-60-70-80 mm
- feed rate: 445 mm

Technical Data:

Technical Data:

Control:

[CNC](#)

Dimensions and Weight:

Height:

1.700 mm

Length:

2.000 mm

Width:

1.500 mm

Weight:

15.000 kg

Buyer Information:

Condition:

[Very good condition](#)

Available:

[On Request](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Location:

Germany

Images:







URPE

ALUMINUM AL


EXTRACTOR E-1



3



4

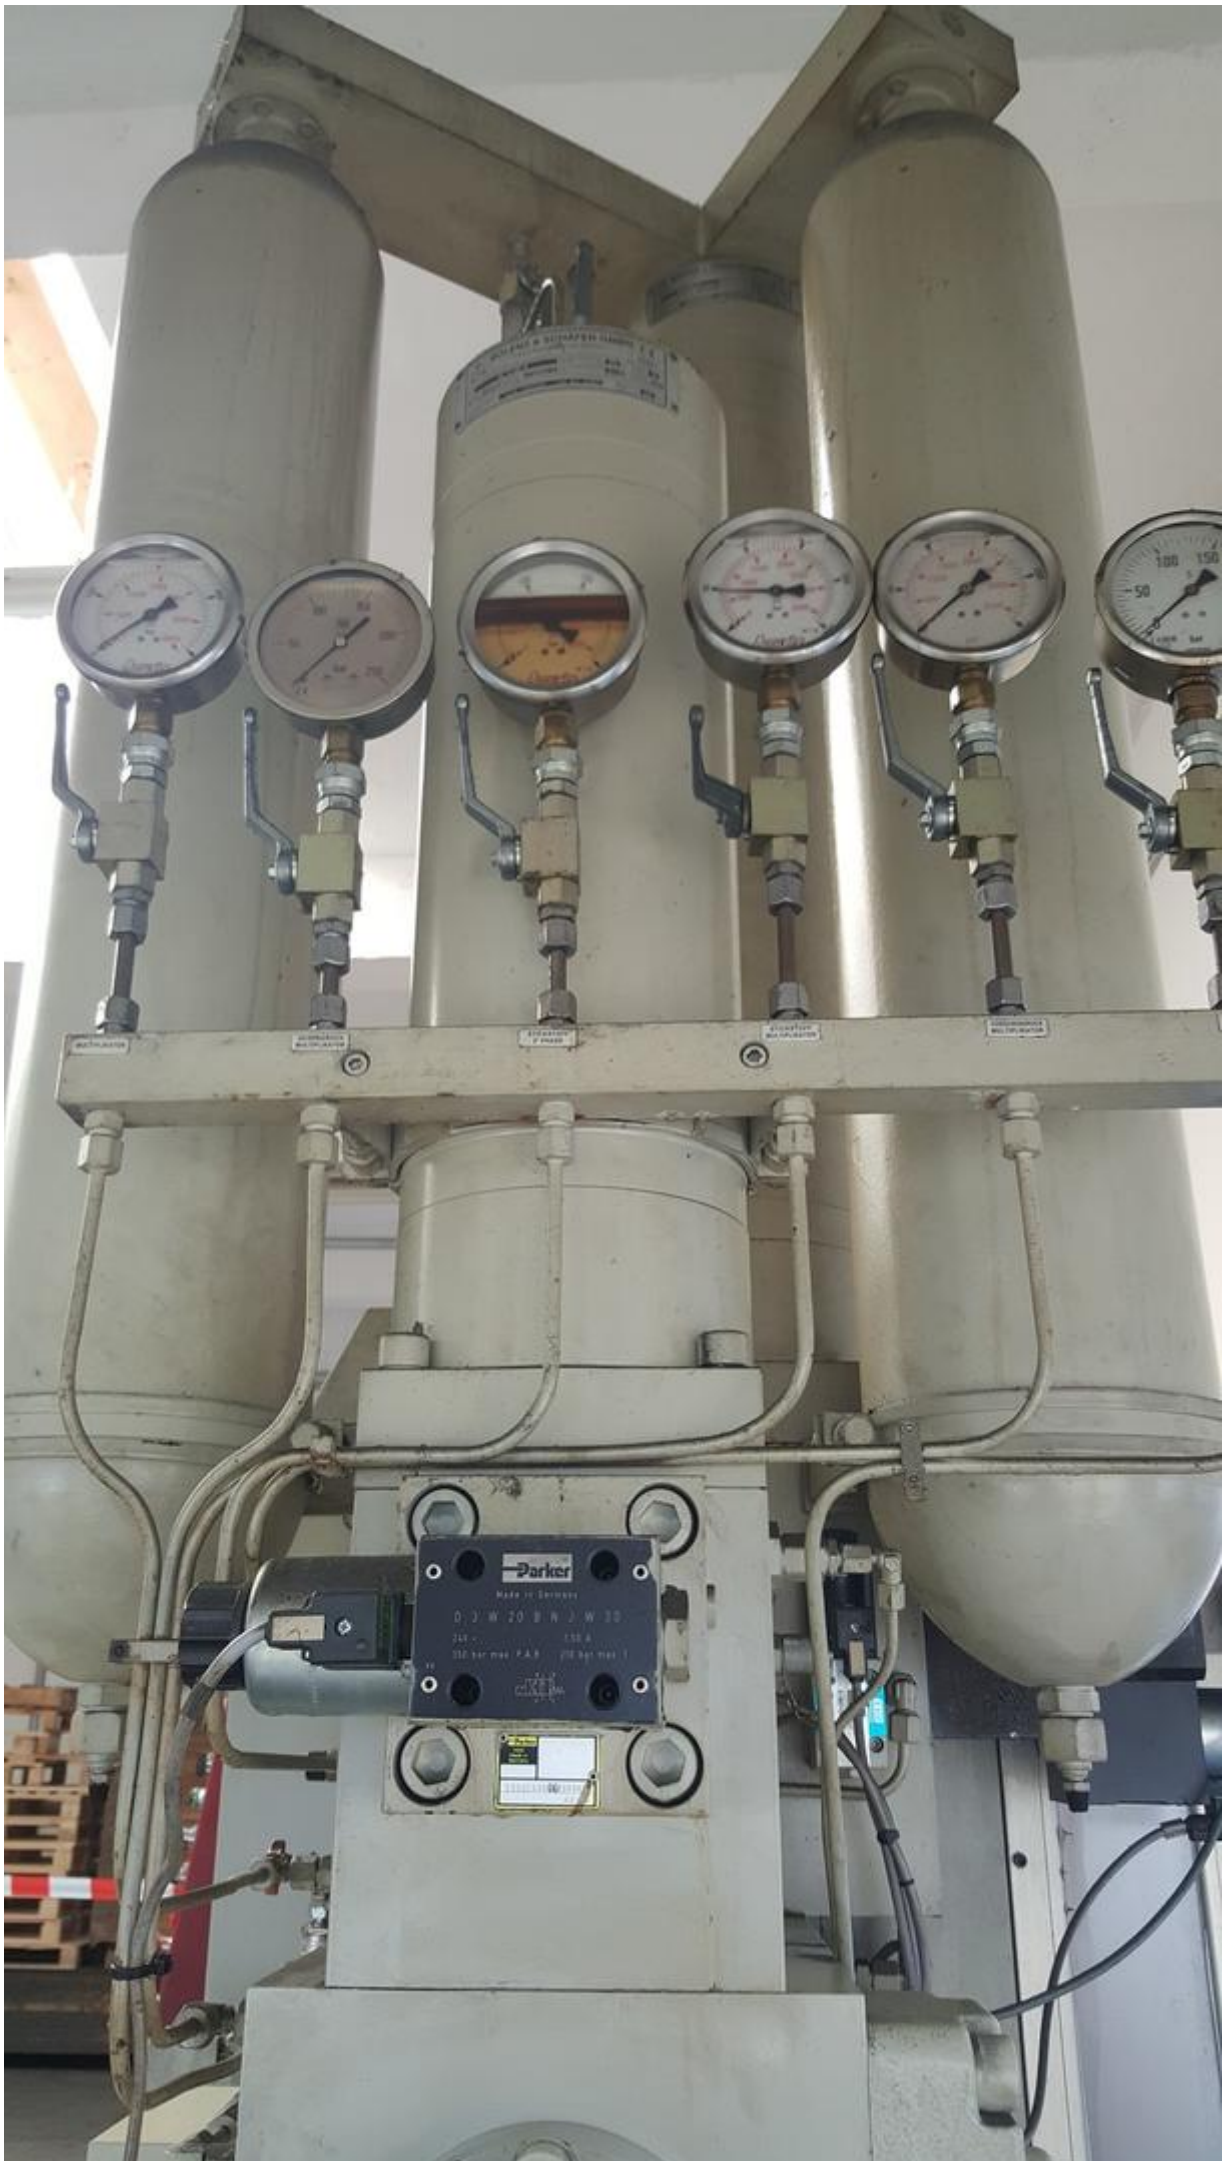



BOLENZ & SCHAFER GMBH
D 35216 Biedenkopf / Lahn (Germany)

zul. Betriebsdruck PS:	375 bar
zul. Betriebstemperatur:	40/40 °C
TS:	
AK 01-375-10	
Serial No.:	6270005983/6
AK N.:	338072043
I test date:	5.03.07
Product pt. MAPP:	531

URPEMAK S.L.

BASUSTABIDEA, 2 - Apdo.18 - 20750
ZUMAIA - GIPUZKOA - ESPAÑA
Tels. 943 860 662 / 66 - 943 860 891
Fax. 943 862 057 - 943 143 450
Telex 36039



MODELO
REF. Y Nº de FABRICACION
AÑO DE FABRICACION
PESO Tn POTENCIA KW



This engine was
conceived and is planned
to work with non-inflamable
fluids

HOUGHTO-SAFE 620

DON'T ADD MINERAL OIL

Manufacturer
HOUGHTON IBERICA

Poligono Ind. "Can Salvassella" TORRE MATEU - Avda. Aragona, 73-75
08210 BARBERA DEL VALLES (Barcelona)
Tel. 93 718 85 00 - Fax 93 718 93 00



MAX
MIN

URPE

BAR	Fza. CIERRE Tm	
100	400	●
90	375	●
80	350	●
70	320	●
		●



ABB Motors CE

3~ Motor M3AA 180 LB-4 H0

No. 74218 002 002

Ins. cl. F IP55

V	Hz	kW	r/min	A	cos φ	I _A /I _N	t _E /s
690Y	50	30,00	1465	32,50	0,84		
400D	50	30,00	1465	56,00	0,84		
660Y	50	30,00	1465	33,50	0,85		
380D	50	30,00	1465	58,00	0,85		
415D	50	30,00	1470	55,00	0,82		
440D	60	35,00	1765	58,00	0,85		

Prod. code 3GAA182103-ADD

IM1001

6310-2Z/C3 6209-2Z/C3 161,00 Xc

IEC 60034-1





MG
-01000000



URPE



URPE





URPE

URPE



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Generated on 21.04.2026

© Copyright 2026 - [Asset-Trade](#)

Page