

Image not found or type unknown



Ref. No.:
1237-09130739

Overview and Technical Data:

POSmill H 800 U - 5 Axis universal Machine Center

POSMILL



Year of Build:
Jan 2019

Description:

Used POSmill H 800 U - 5 axis machining center with full options

Operating hours: On 5,564 / spindle 1,859 hours.

CNC control Heidenhain TNC 640

Technical data

- Travels
 - x-axis: 670 mm
 - y-axis: 820 mm
 - z-axis: 600 mm
- distance spindle/table: 120-720* mm
- tilt range: +120 / -120 degrees
- rotary table: 360 endless degrees
- Table
 - diameter: 800 mm
 - load, max.: 1.200 kg
 - T-slots: 9 number / 90 mm
- Feeding system
 - rapid traverse: up to 60 m/min.
 - Revolutions A-axis: 50
 - Revolutions C-axis: 100
- Drive spindle
 - Tool holder: HSK A63
 - Speed, max.: 18,000 rpm
- Tool changer

- Places: 64 standard max
 - Tool length, max.: 300 mm
 - Tool weight, max.: 8 kg
 - Change time: from 8.5 sec
 - Connected loads
 - Electrical: 90kVA, 400 V
 - Back-up fuse: 125 A
 - Pneumatic: 6 bar
-

Mechanical engineering

A typical gantry design forms the basis of the H series. This basic design results in many accessibility advantages. On the one hand, optimum accessibility is created for the operator. With this design, the operator stands directly at the table. Furthermore, the 96 tools are placed directly from the opposite side and loading can take place from above. Of course, with the massive dimensioning of 20 tons of machine weight, the best tool life is achieved with maximum workpiece weights of 1.2 tons.

Milling head

The so-called back-sit method reduces the tilting moments to a minimum, so that the best flatness is achieved for large parts. In addition, vibrations and resonances are absorbed, resulting in greatly improved tool life. Combined with grid technology, the milling head meets these requirements with the best dynamics and durability.

Control loop

Of course, we remain loyal to our supplier Heidenhain in full line for you in the H-series as well. Even in the Y-axis we drive with two Heidenhain motors and monitor the positions with two glass scales to eliminate torsion.

Force management

35 kW power in the spindle and linear drive forces of 1.75 tons ensure large reserves even with critical materials. The support elements in the guide shoes themselves are not just balls, but high-quality rollers, so that force transmission takes place at the highest level.

Feed system

The direct drive in all axes is designed with oversized ball screws of $\varnothing 45$ mm. Acceleration to the rapid traverse rate of 60 m/min. is achieved in the shortest possible time. This is done at a very low thread pitch in order to be able to position reliably.

Guide system

The linear roller guides used offer the best reproducibility combined with a long service life. In this machine class, the 45 mm guide dimensioning ensures extremely long tool life and power reserves for emergencies. The wide guideways in all axes ensure consistent results, even with eccentrically clamped workpieces.

Technical Data:

Technical Data:

Control:

[TNC 640](#)

Machine Hours:

5.564 hrs.

Spindle Hours:

1.859 hrs.

Spindle Speed:

18.000 rpm

Tool Holder:

[HSK-A63](#)

Tool Capacity:

96 x

Travels:

X-Axis:

670 mm

Y-Axis:

820mm

Z-Axis:

600 mm

Dimensions and Weight:

Height:

3.500 mm

Width:

5.000 mm

Length:

4.150 mm

Weight:

20.200 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Sold](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[16 %](#)

Location:

Germany

Images:






POSMILL H800U


Clipboard with a document, likely a checklist or maintenance log, attached to the machine panel.






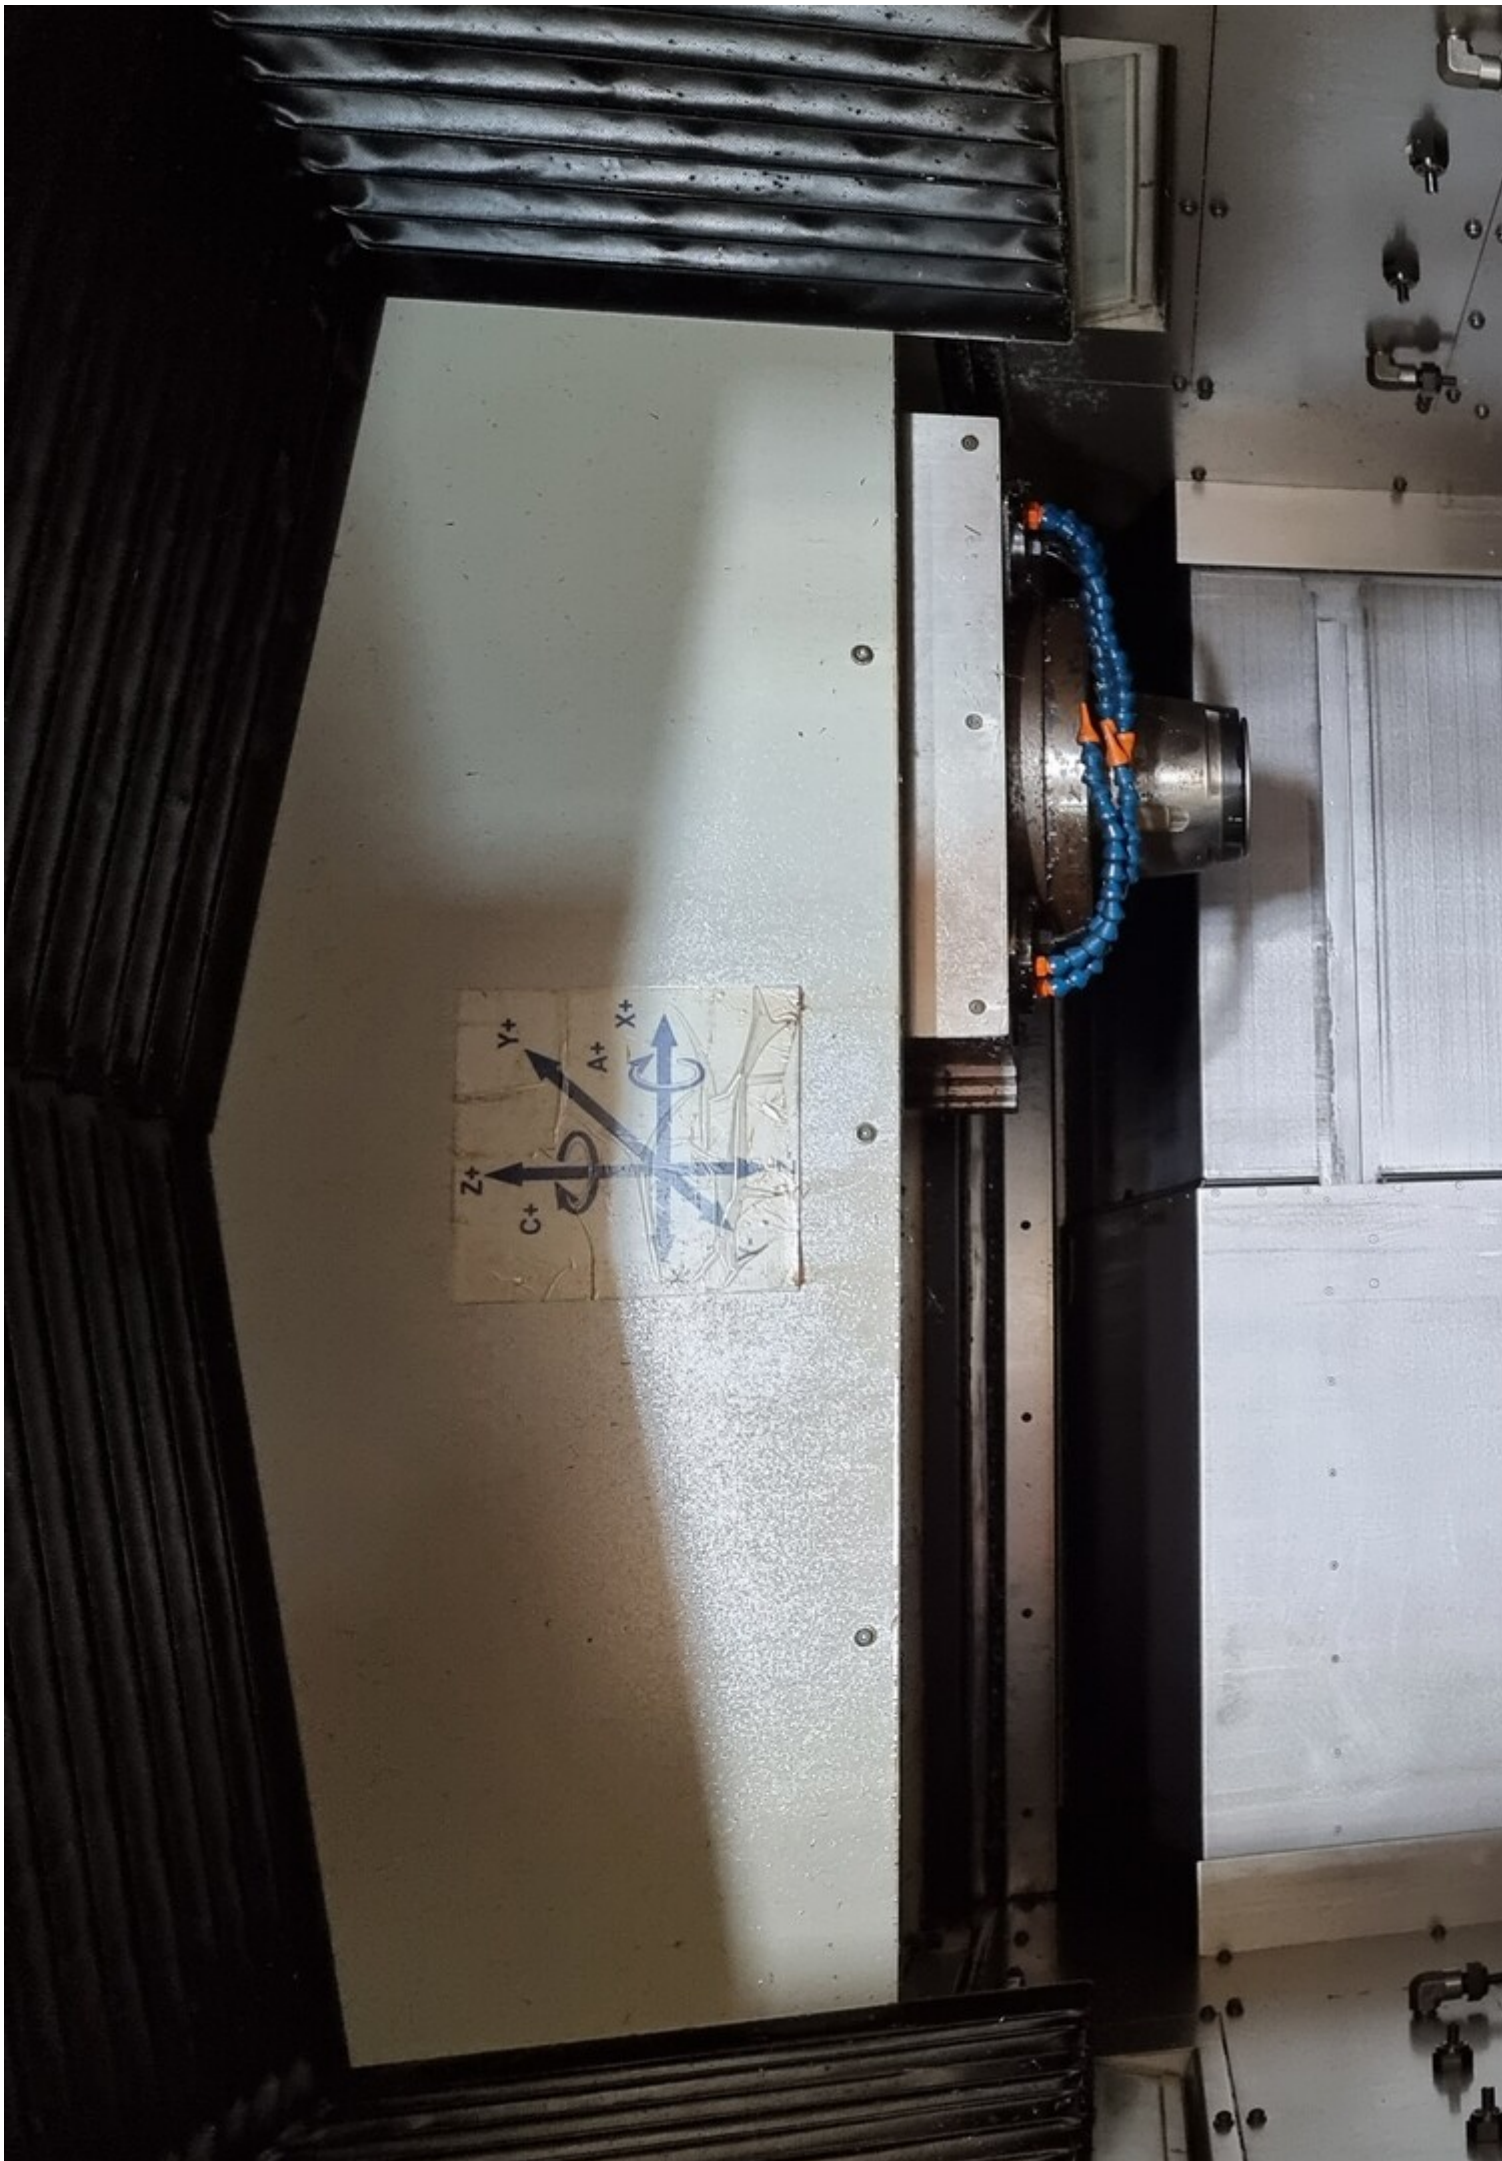

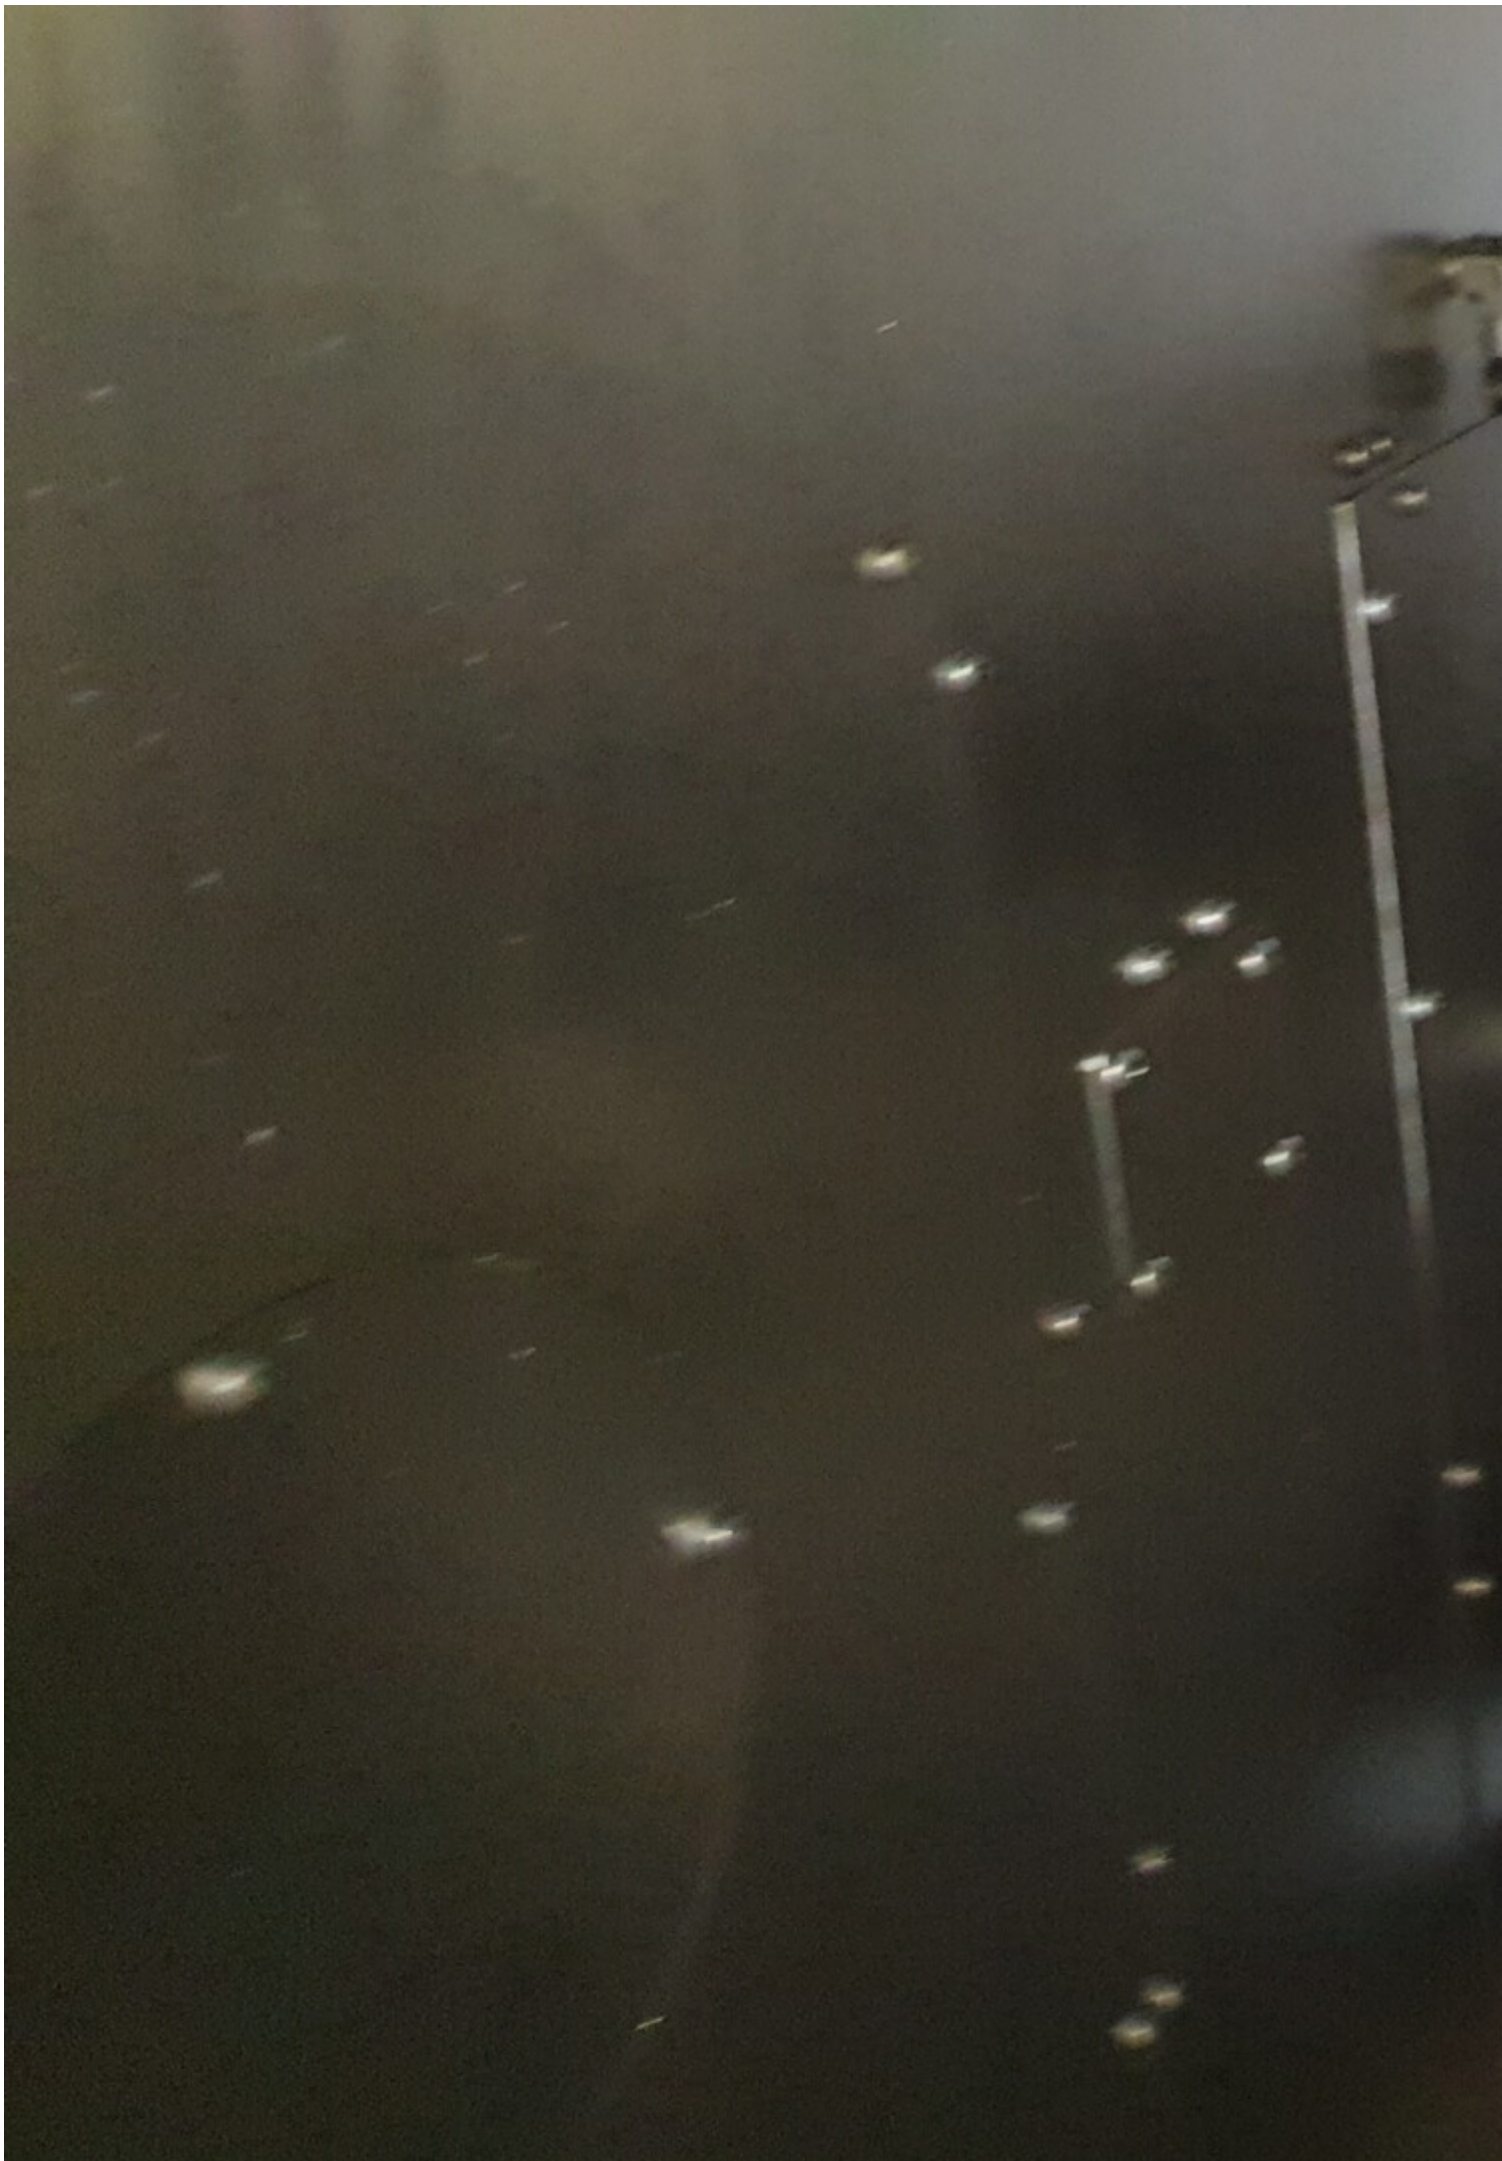

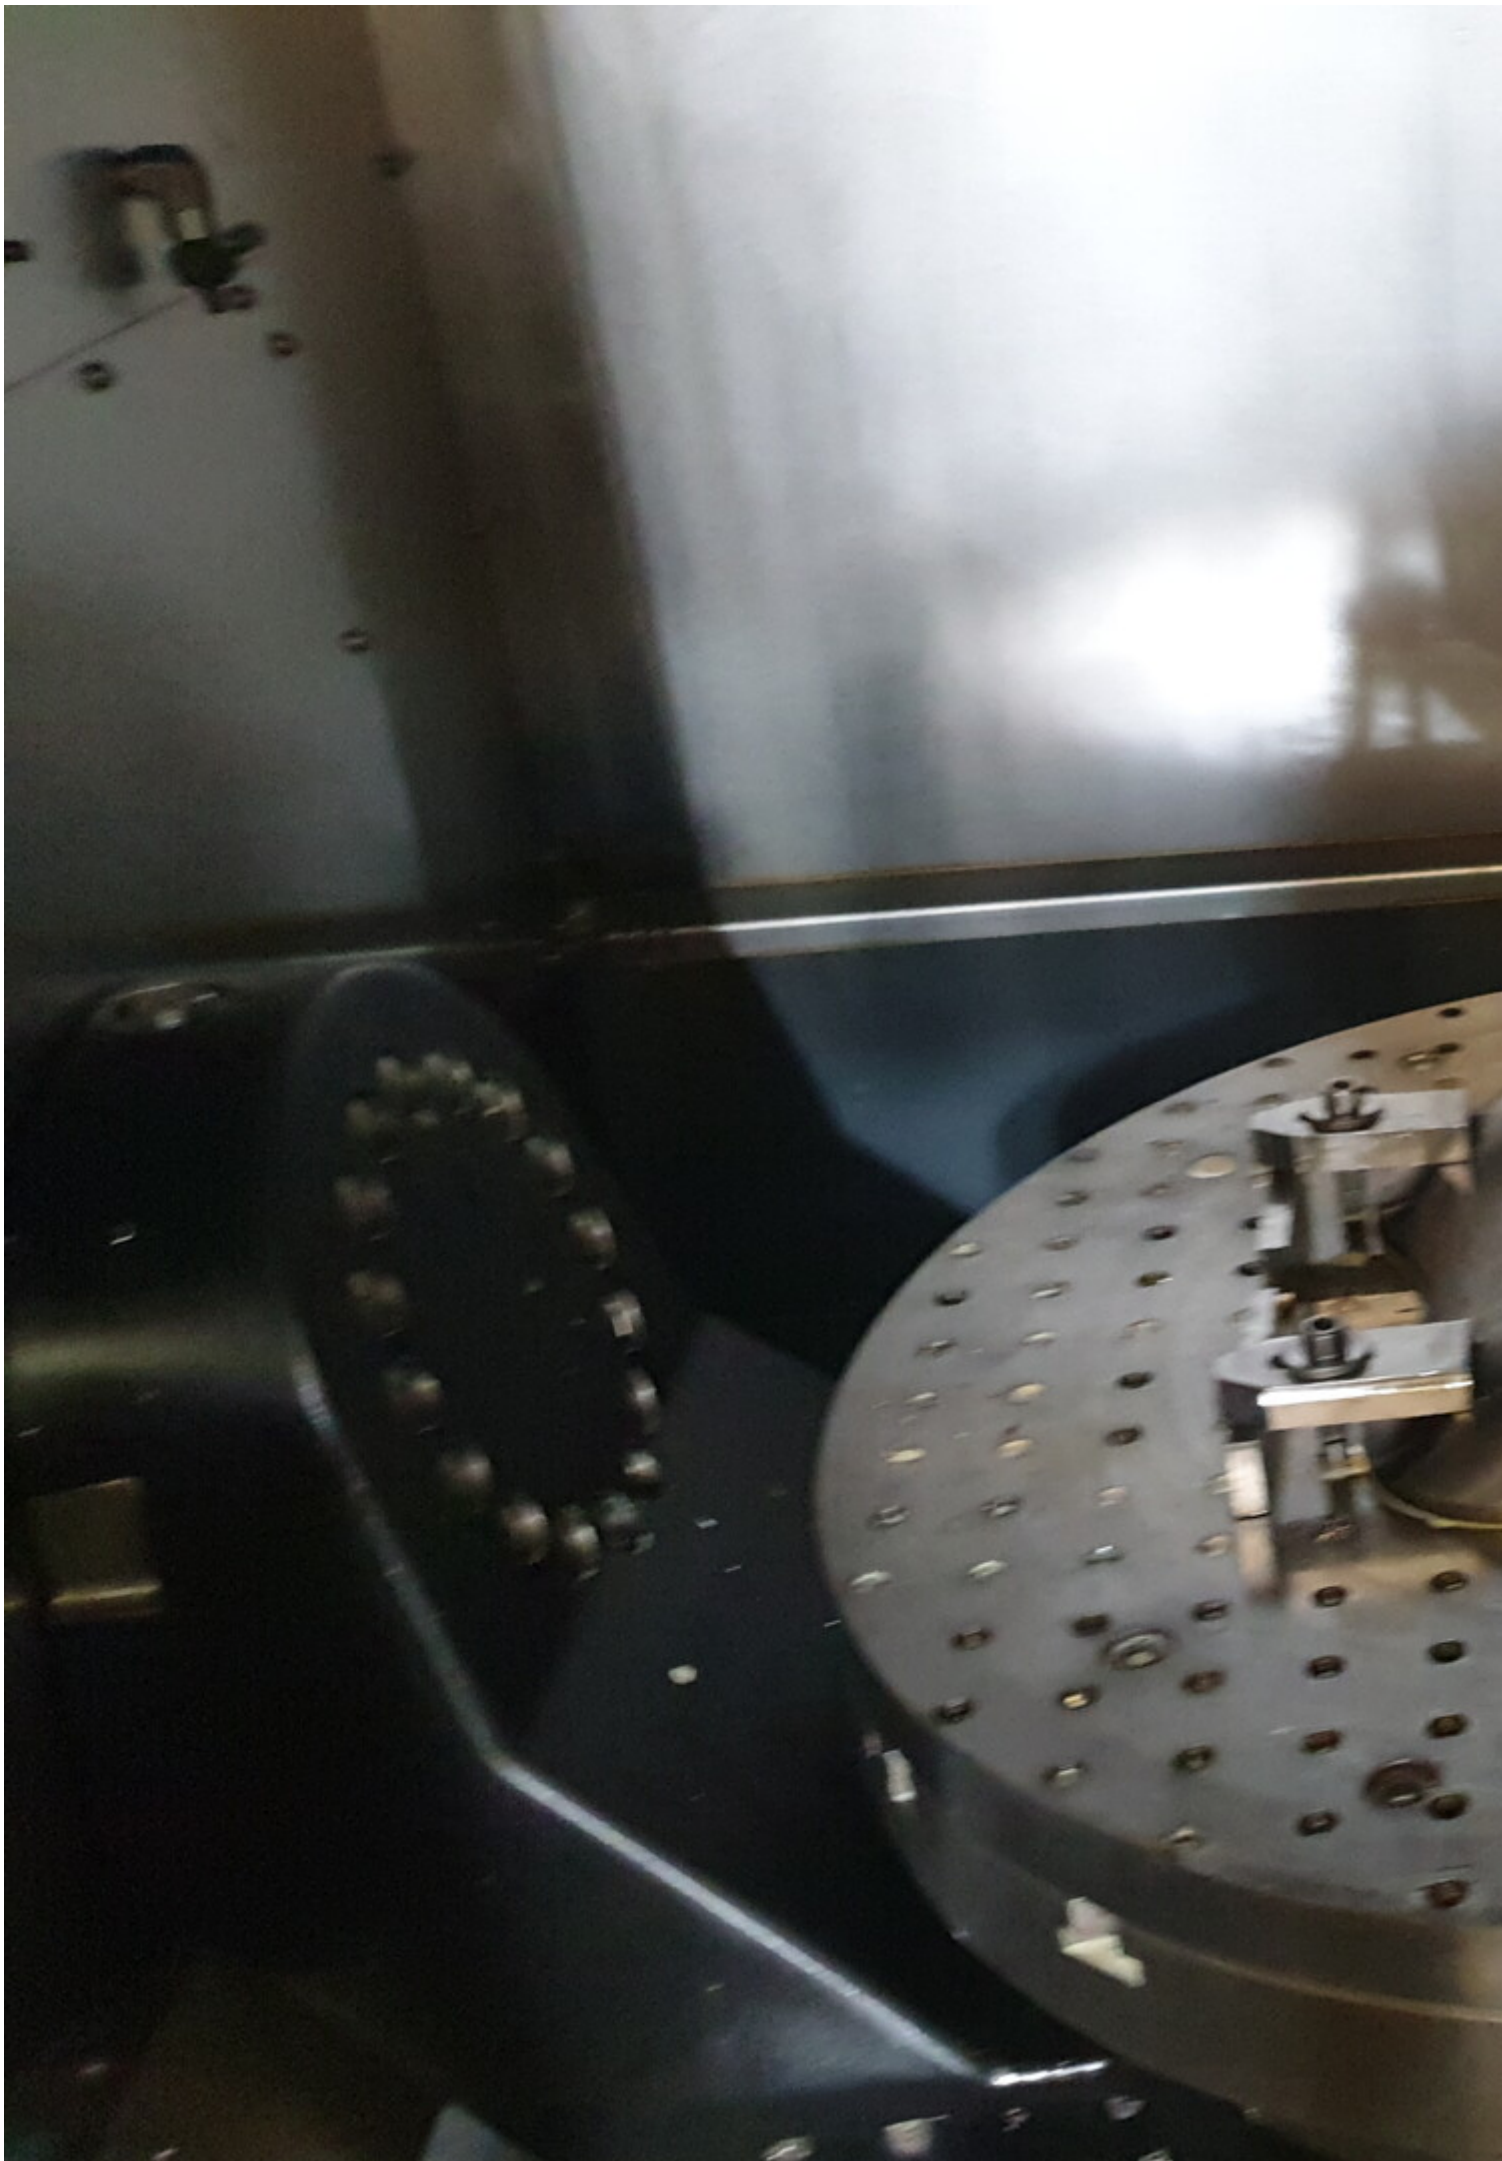



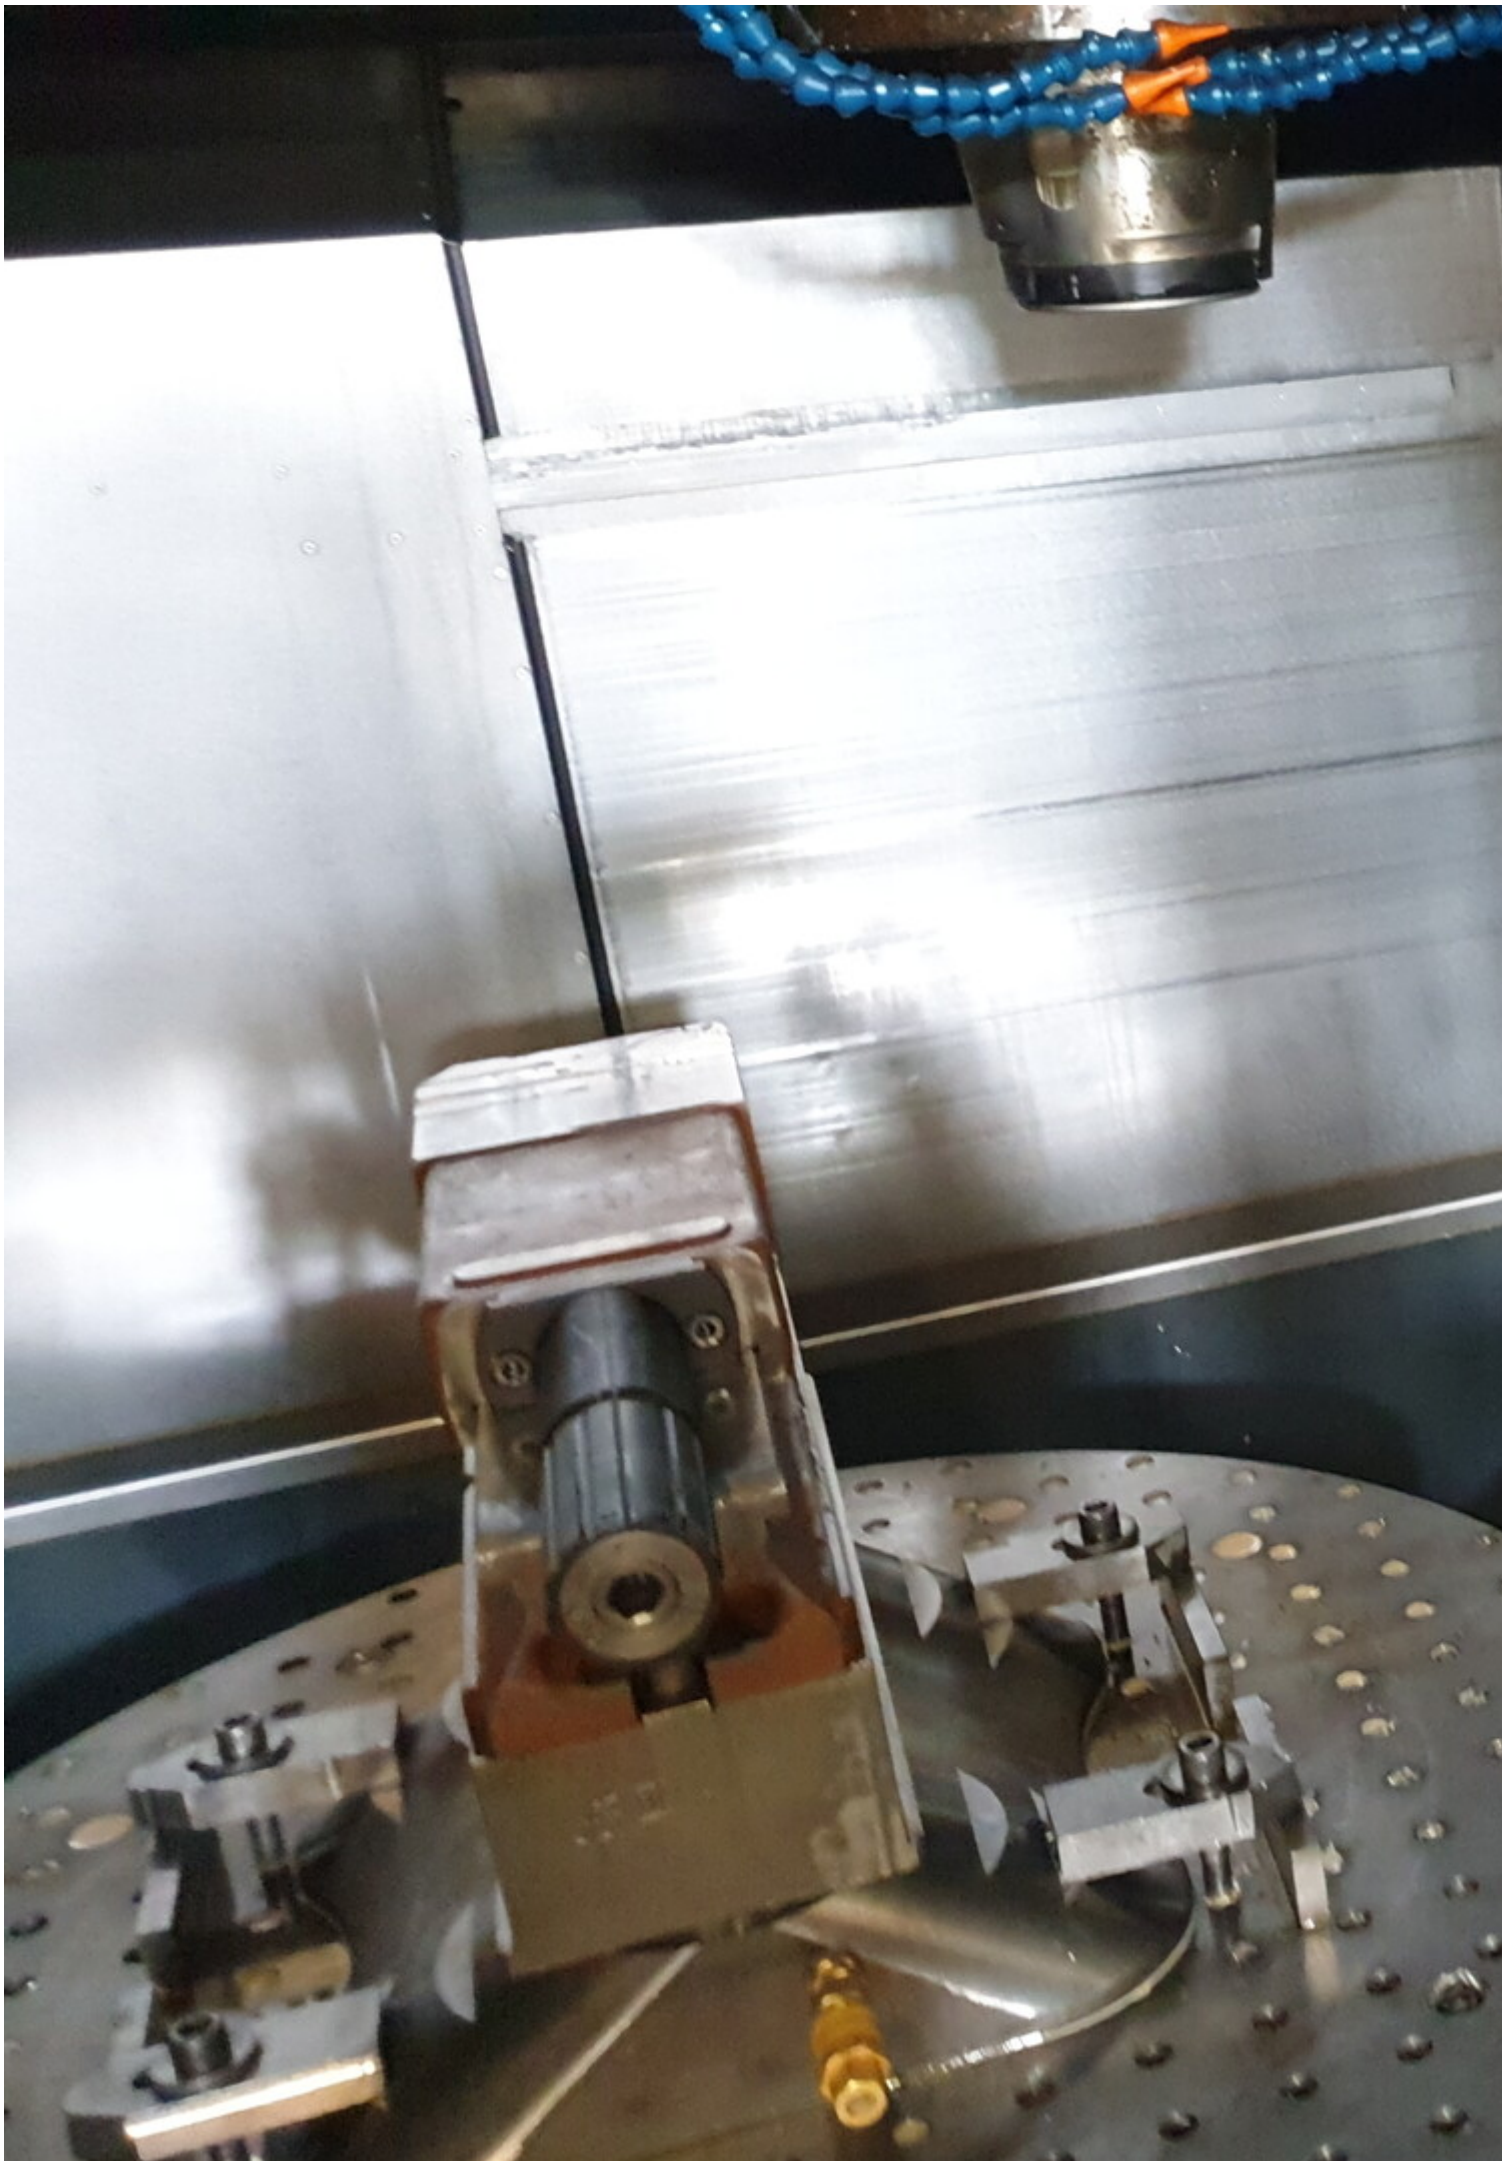



HEIDENHAIN



Strom-Unterbrechung

Programmieren



Einstellungen und Information


- Schlüsselzahl-Eingabe
- Anzeige-Einstellungen
- Grafik-Einstellungen
- Zähler-Einstellungen
- Maschinen-Einstellungen
- System-Einstellungen
- Diagnose-Funktionen
- Allgemeine Information
- Versions-Information
- Lizenz-Information
- Maschinenzeiten**



Maschinenzeiten
Steuerungstyp: TNC640
340530 00 SP3

OK

Schlüsselzahl	
Steuerung ein	5564 : 57 : 58
Maschine ein	5248 : 55 : 11
Programmlauf	2944 : 16 : 35
Hydraulik	5253 : 02 : 31
Achsen	1688 : 43 : 16
Spindel S1	1825 : 18 : 53
Spindel S2	0 : 00 : 00



S100%
AUS EIN

F100%

n
ngen

n

ion

ion

n

Schlüsselzahl:

Steuerung ein

Maschine ein

Programmlauf

Hydraulik


Achsen

Spindel S1

Spindel S2



GEBR. BRAG
Eisenwerkzeuge
© 07351 71 65-0
www.brag-werkzeuge.de

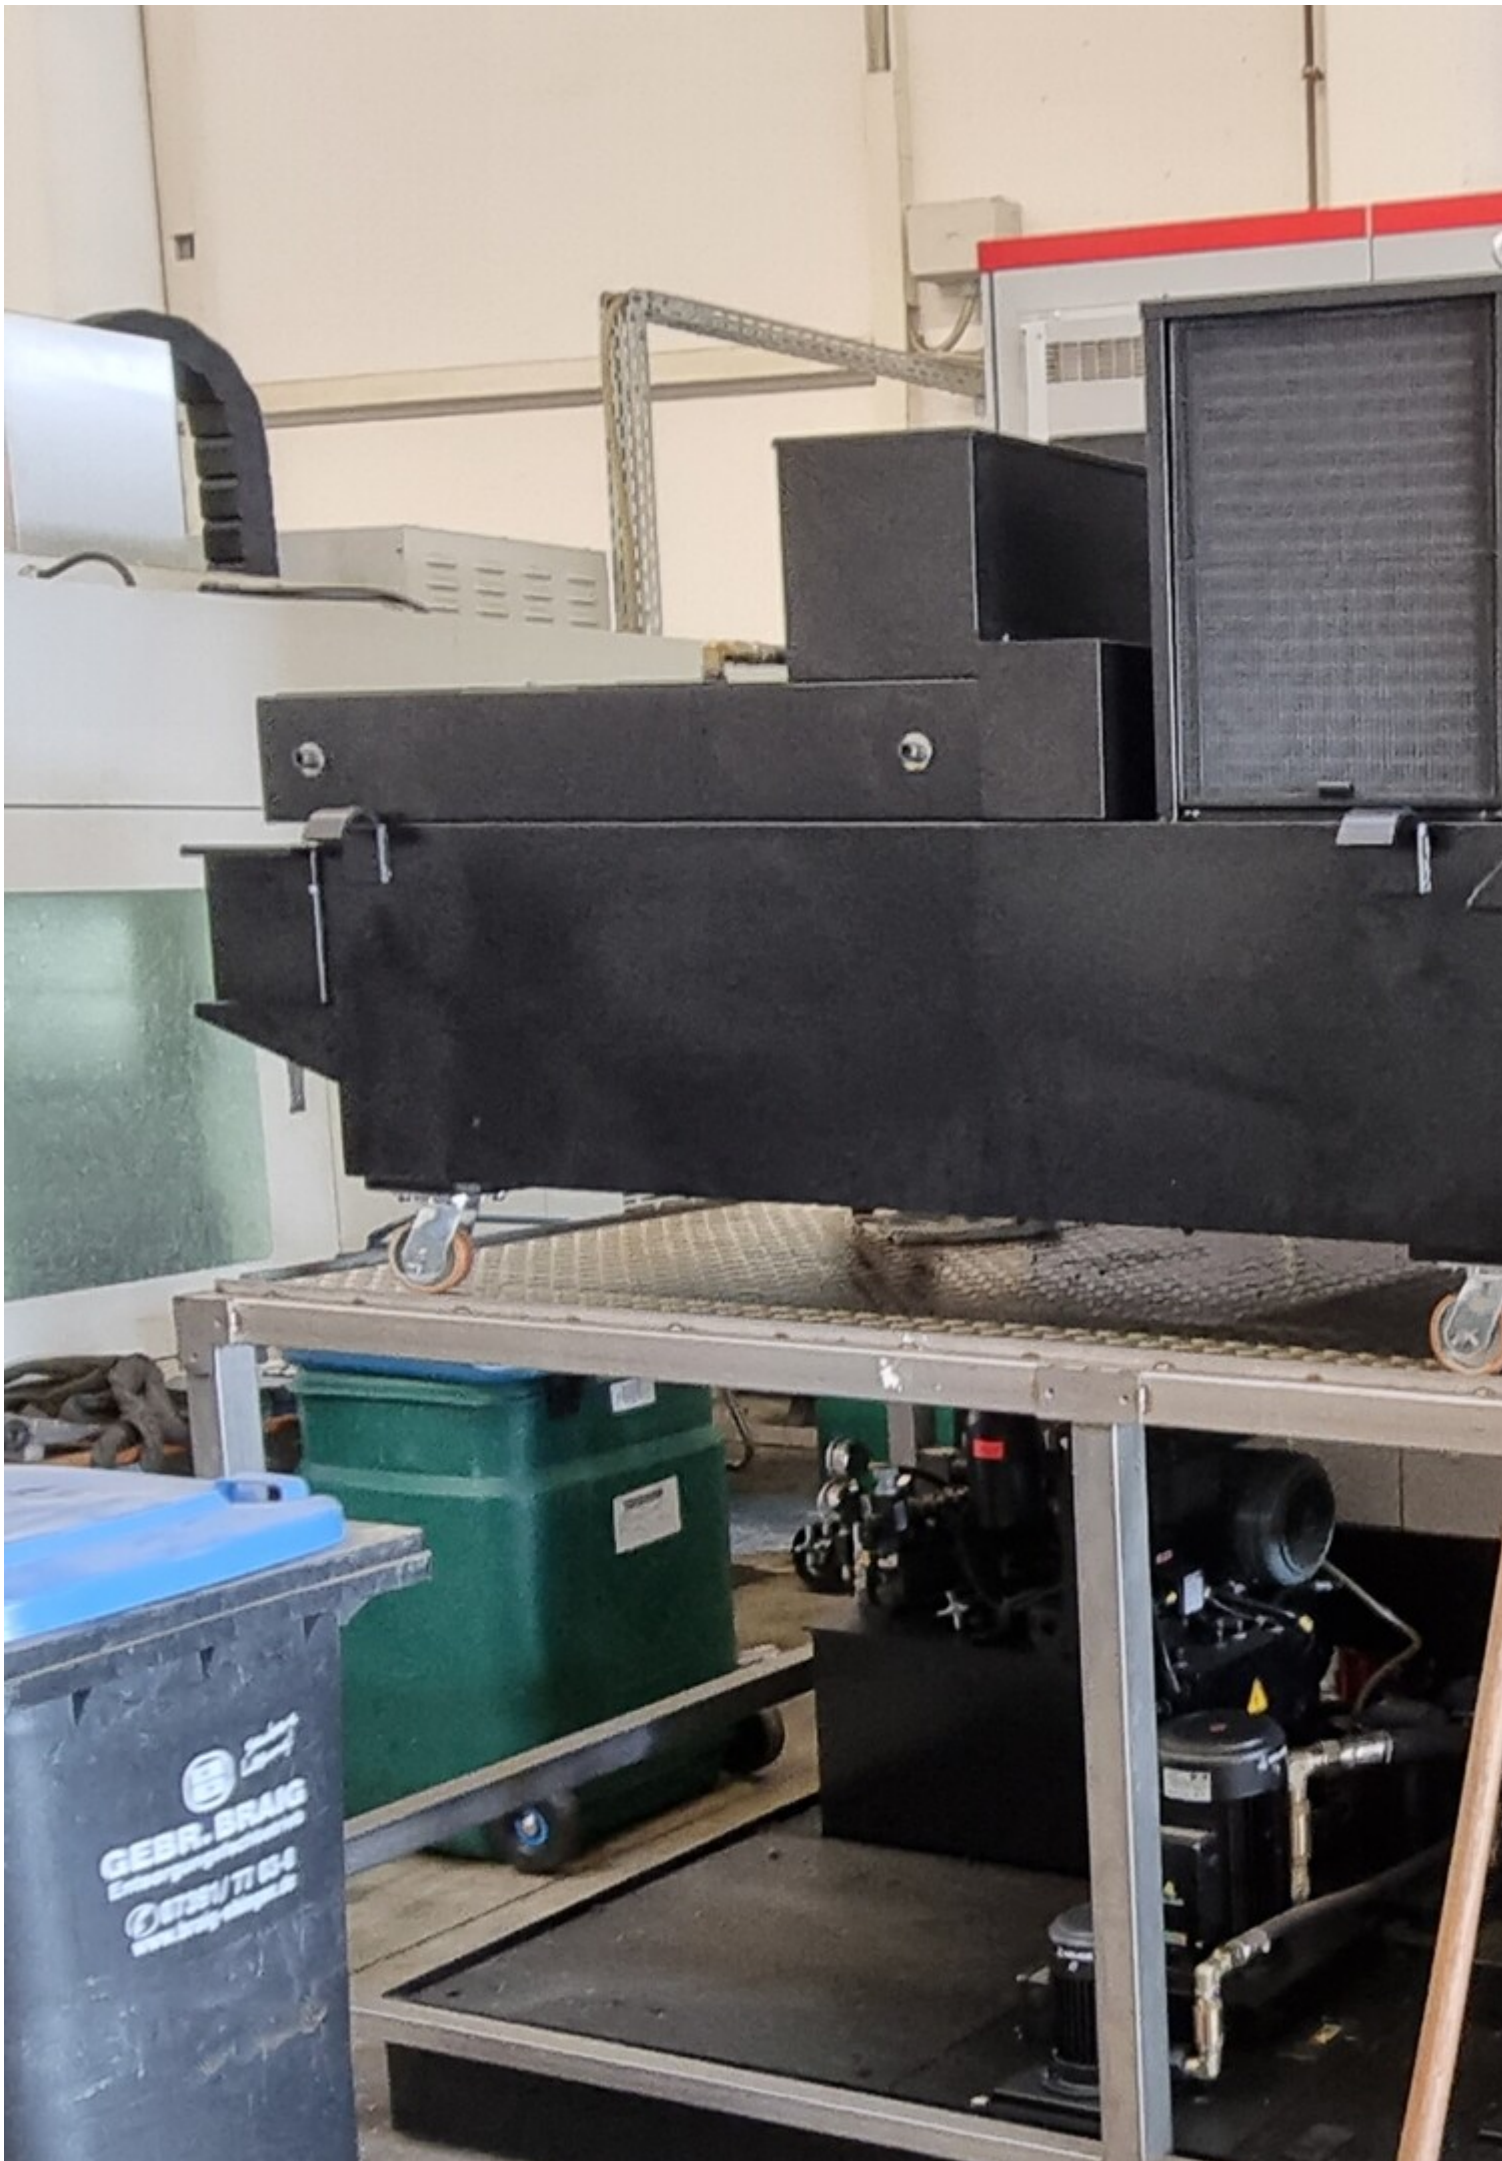


GEBR. BRAIG
Kälte- und Klimatechnik
07141/7115-0
www.braig-klimatechnik.de

ATTENZIONE

1. Non toccare mai la ruota con le mani o con qualsiasi altro strumento. La ruota è molto calda e può essere molto pesante. Evitare di toccare la ruota con le mani o con qualsiasi altro strumento. Evitare di toccare la ruota con le mani o con qualsiasi altro strumento. Evitare di toccare la ruota con le mani o con qualsiasi altro strumento.

ACHTUNG



2. Die Räder sind sehr heiß und können sehr schwer sein. Vermeiden Sie es, die Räder mit den Händen oder mit irgendwelchen Werkzeugen zu berühren. Vermeiden Sie es, die Räder mit den Händen oder mit irgendwelchen Werkzeugen zu berühren. Vermeiden Sie es, die Räder mit den Händen oder mit irgendwelchen Werkzeugen zu berühren.

WARNING


3. Do not touch the wheels with your hands or any tool. The wheels are very hot and can be very heavy. Avoid touching the wheels with your hands or any tool. Avoid touching the wheels with your hands or any tool. Avoid touching the wheels with your hands or any tool.


ATTENTION!

4. Ne touchez jamais les roues avec vos mains ou avec n'importe quel outil. Les roues sont très chaudes et peuvent être très lourdes. Évitez de toucher les roues avec vos mains ou avec n'importe quel outil. Évitez de toucher les roues avec vos mains ou avec n'importe quel outil. Évitez de toucher les roues avec vos mains ou avec n'importe quel outil.

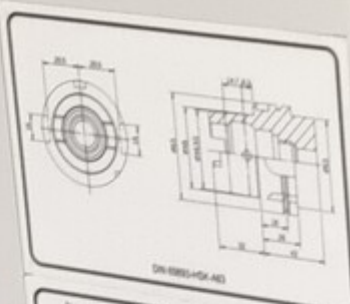




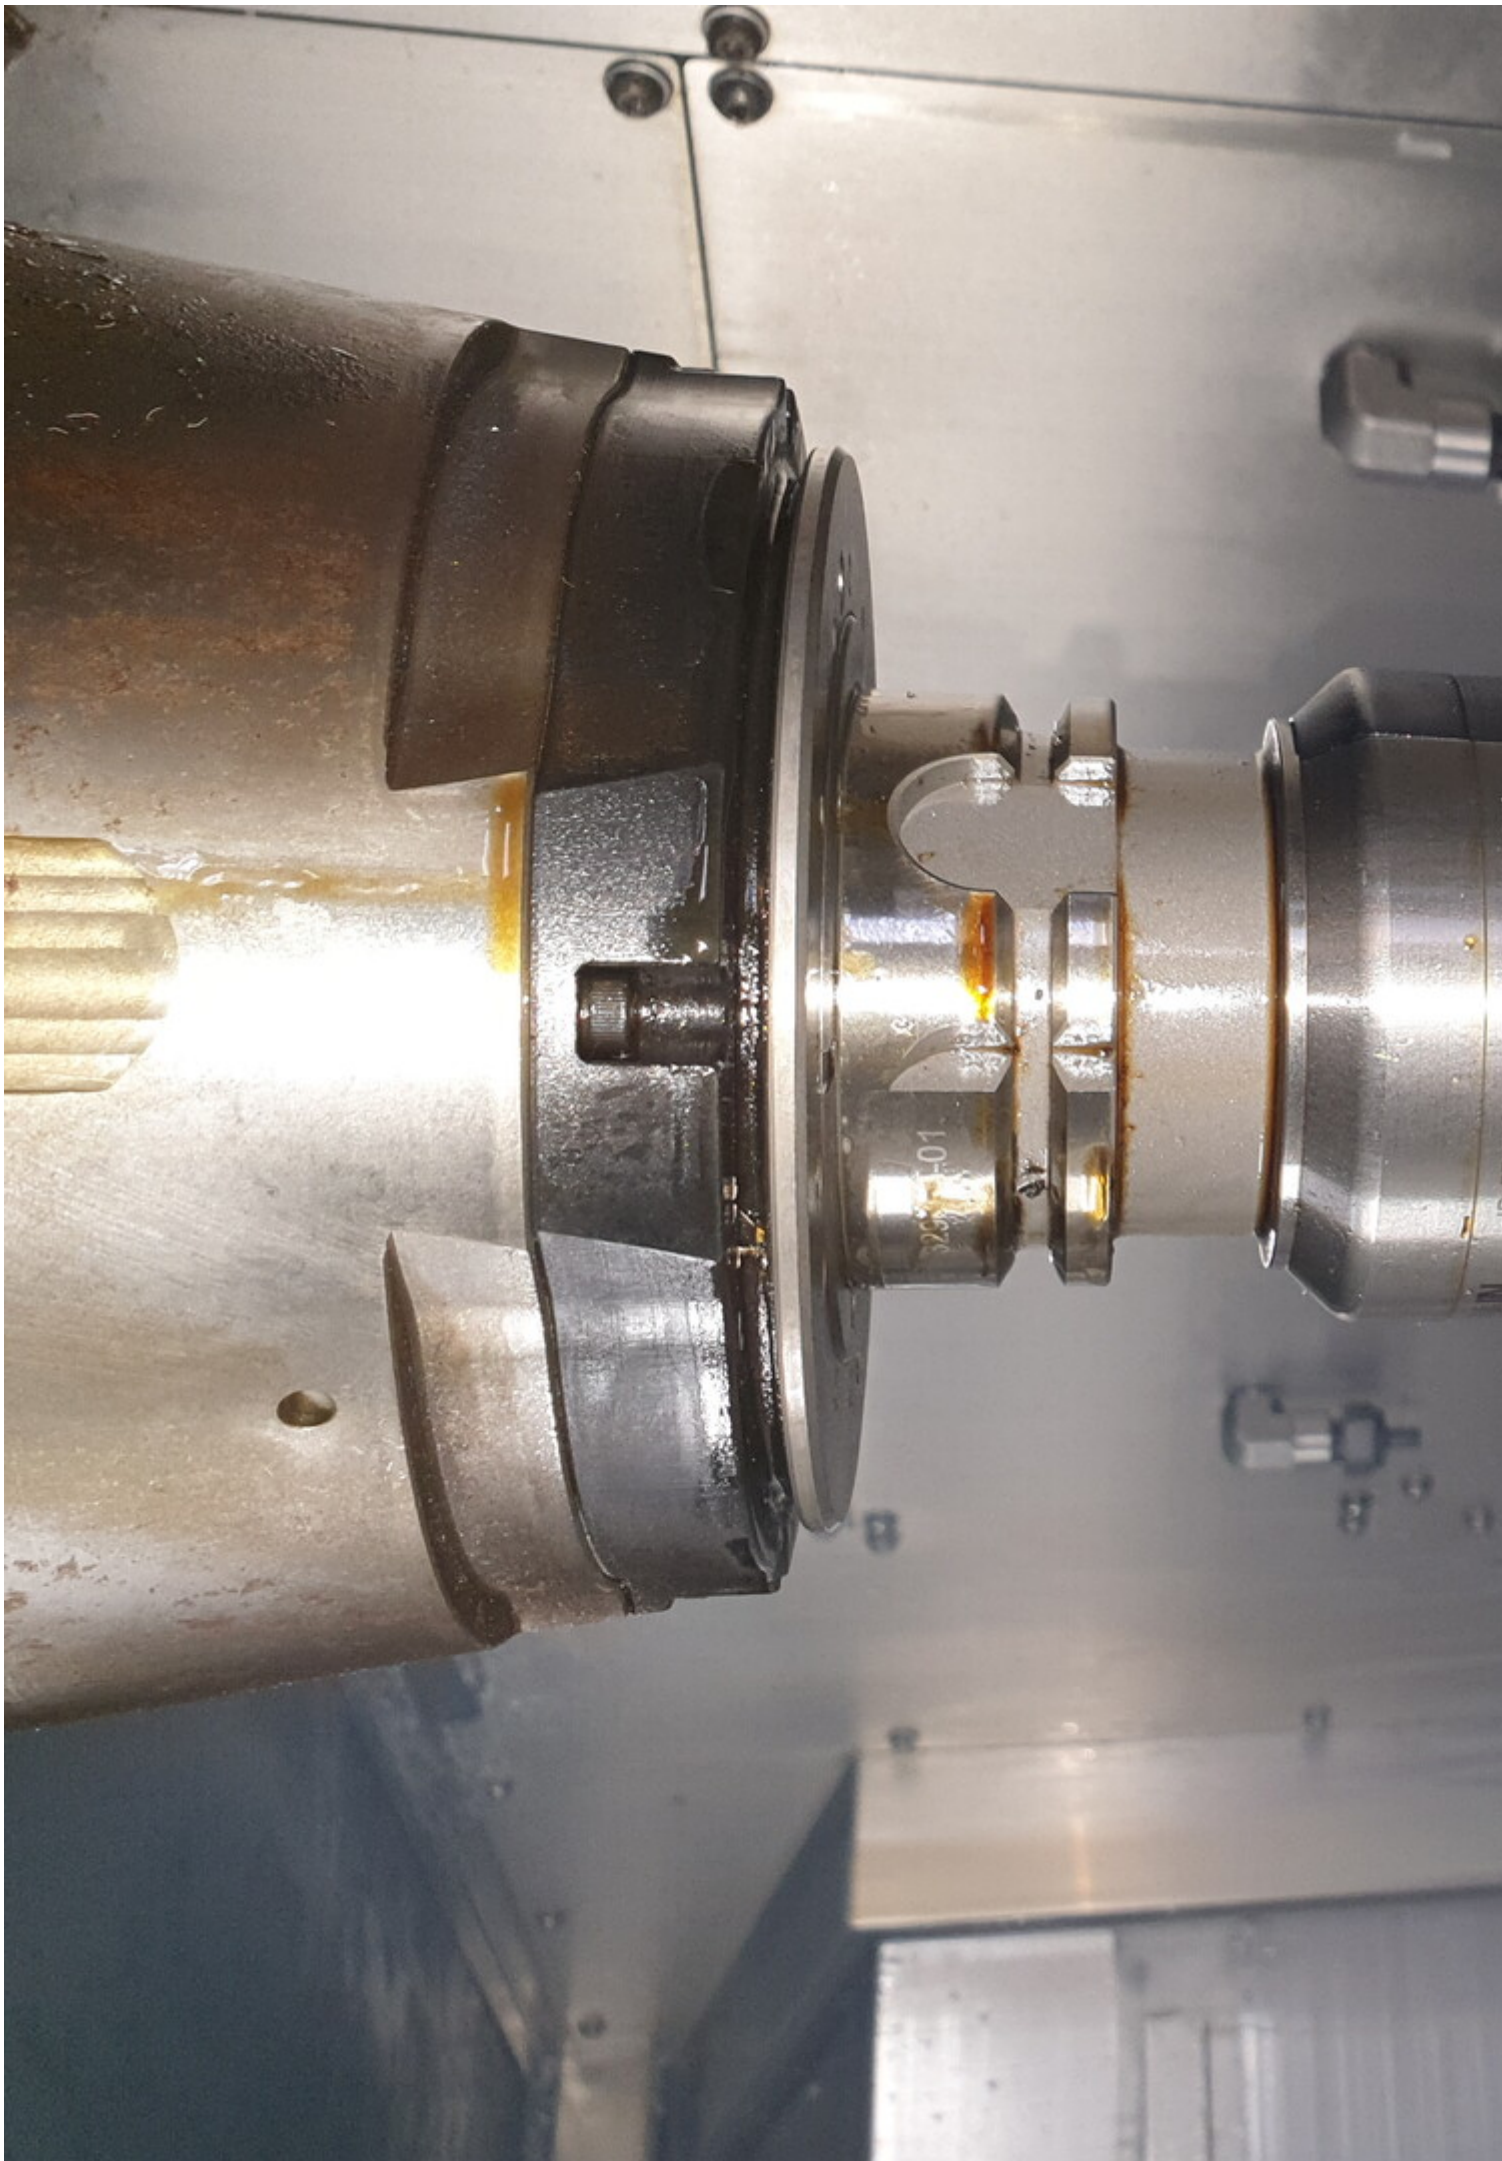

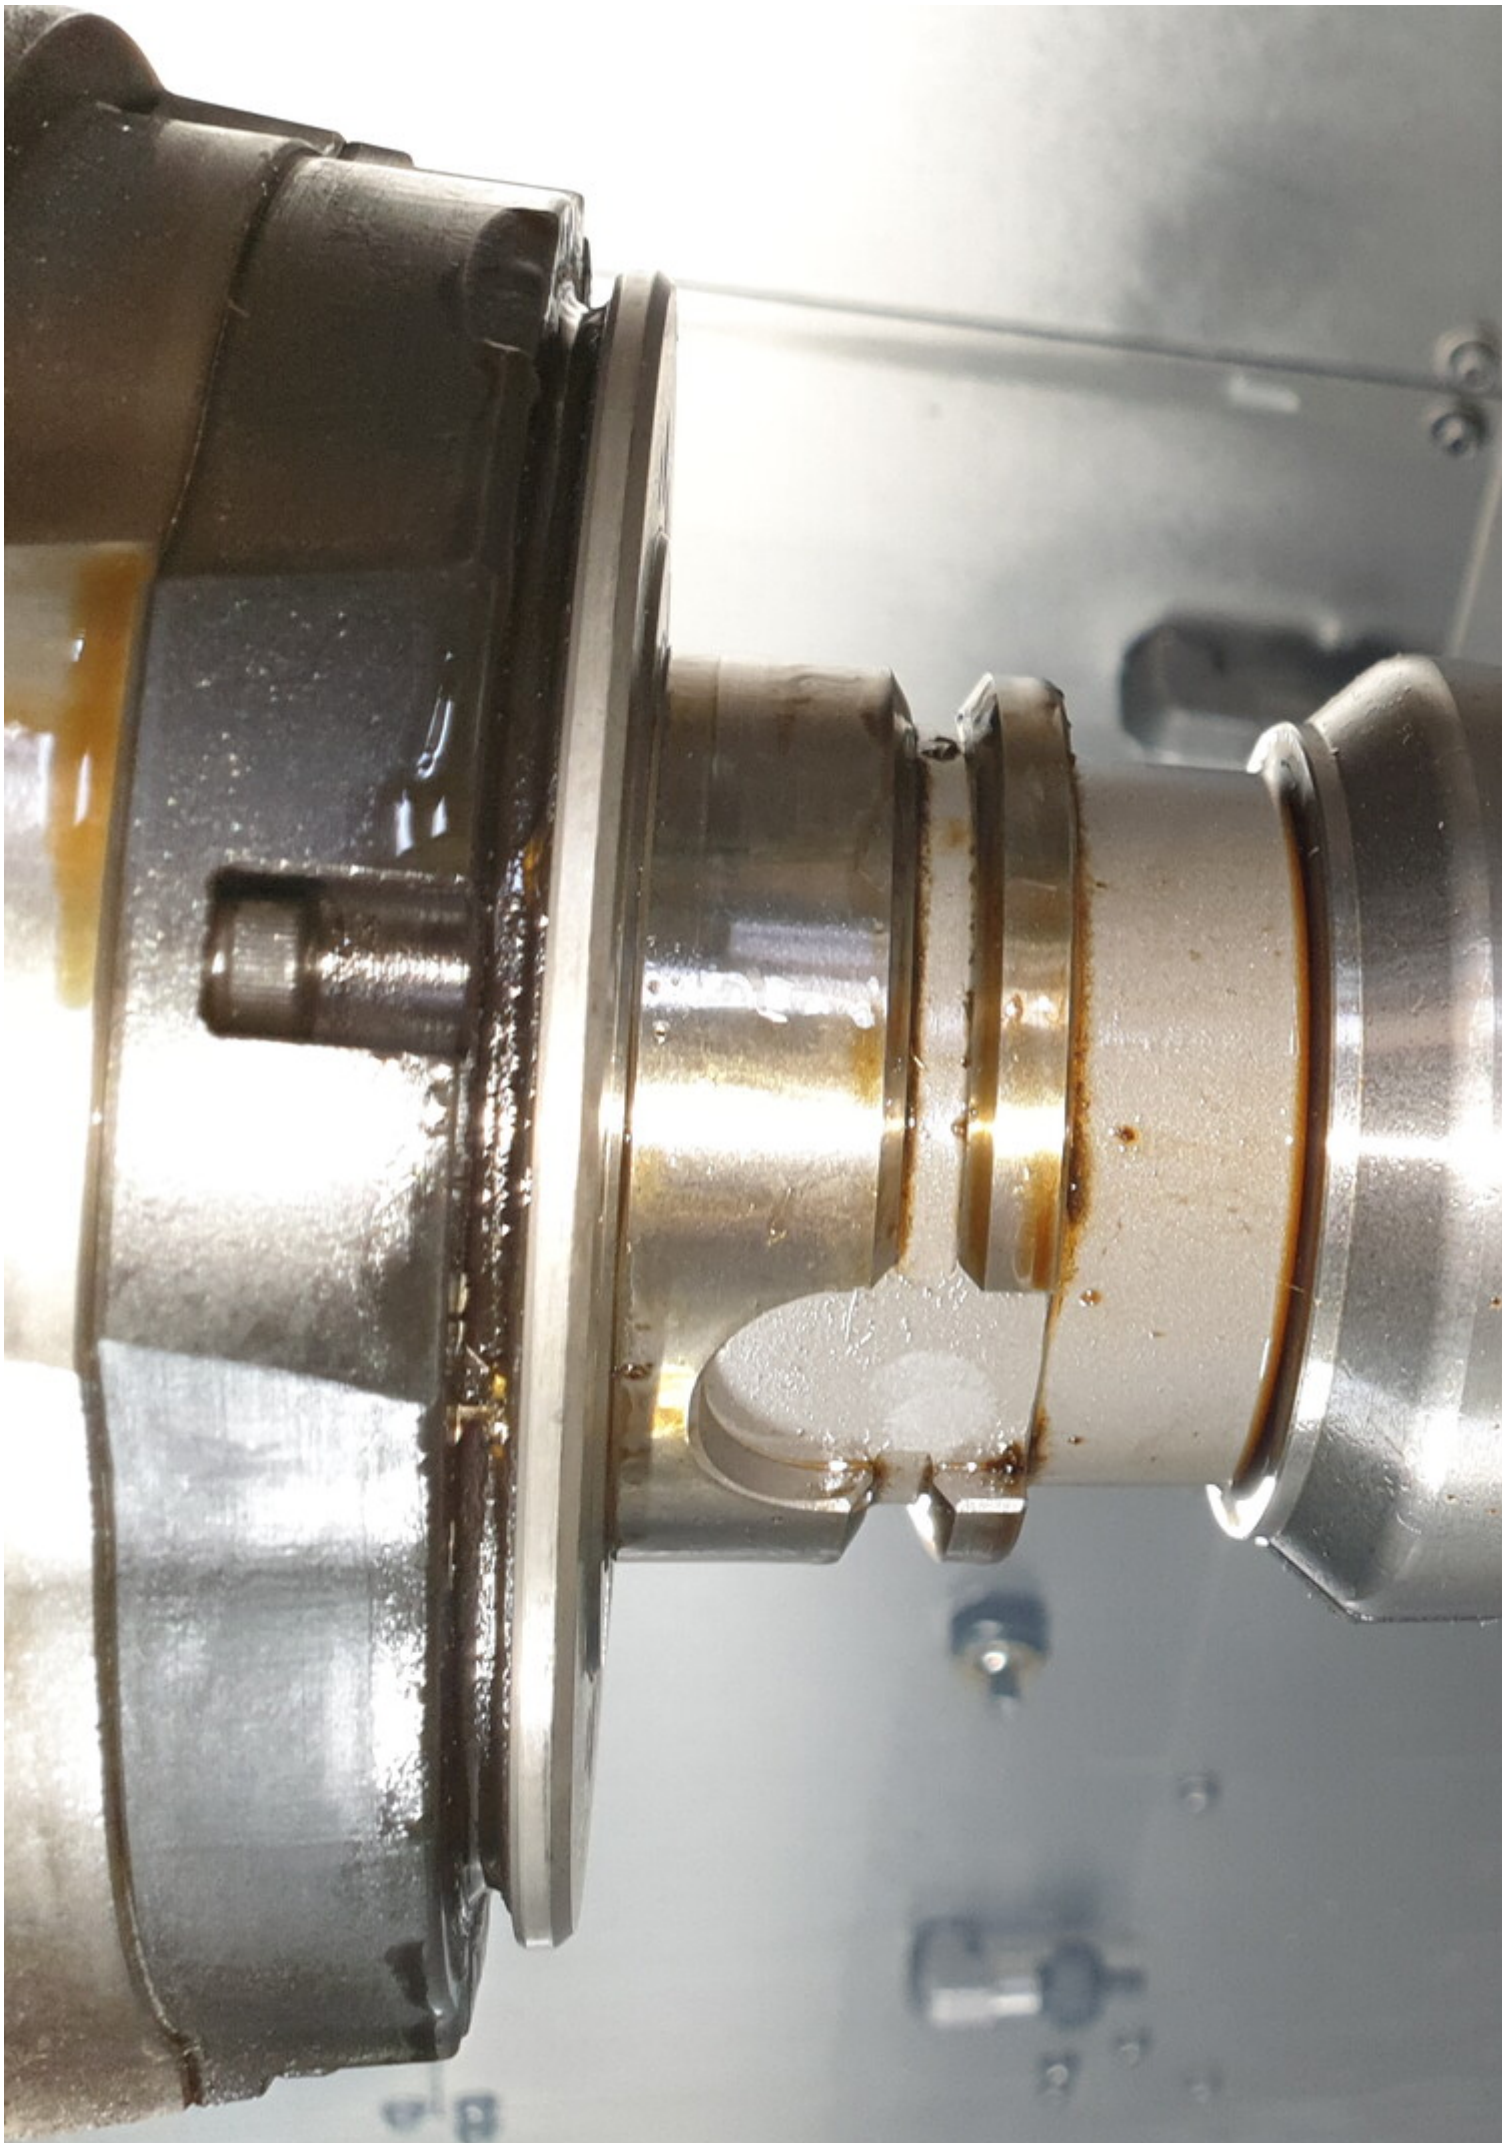

Video:

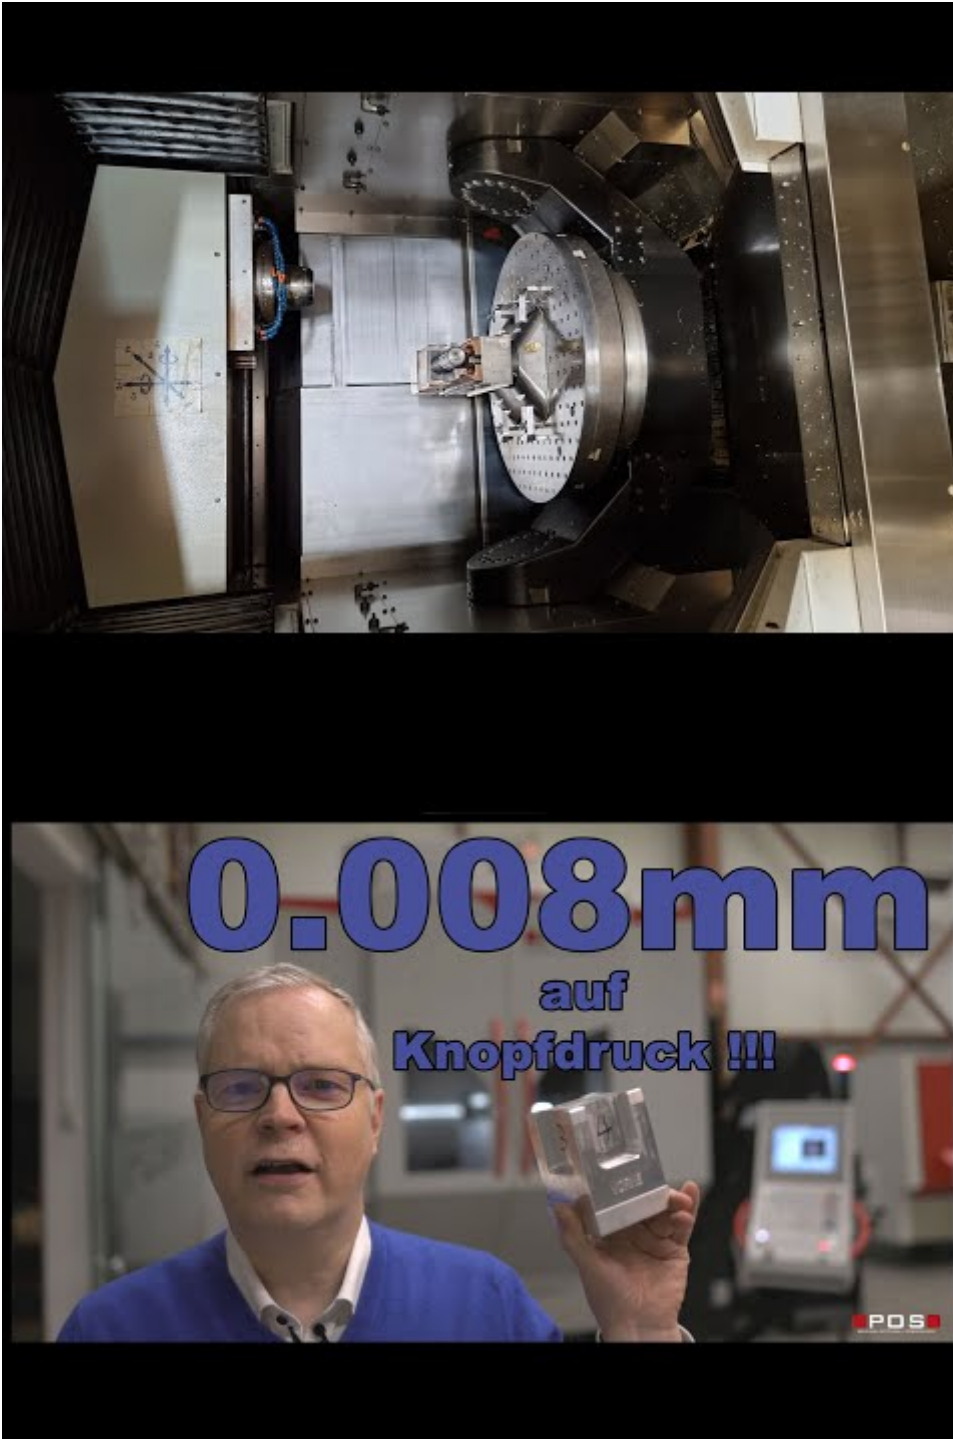



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Ref. No.:
1237-09130739

Overview and Technical Data:

POSmill H 800 U - 5 Axis universal Machine Center



Year of Build:
Jan 2019

Description:

Used POSmill H 800 U - 5 axis machining center with full options

Operating hours: On 5,564 / spindle 1,859 hours.

CNC control Heidenhain TNC 640

Technical data

- Travels
 - x-axis: 670 mm
 - y-axis: 820 mm
 - z-axis: 600 mm
- distance spindle/table: 120-720* mm
- tilt range: +120 / -120 degrees
- rotary table: 360 endless degrees
- Table
 - diameter: 800 mm
 - load, max.: 1.200 kg
 - T-slots: 9 number / 90 mm
- Feeding system
 - rapid traverse: up to 60 m/min.
 - Revolutions A-axis: 50
 - Revolutions C-axis: 100
- Drive spindle
 - Tool holder: HSK A63
 - Speed, max.: 18,000 rpm
- Tool changer
 - Places: 64 standard max
 - Tool length, max.: 300 mm
 - Tool weight, max.: 8 kg
 - Change time: from 8.5 sec
- Connected loads
 - Electrical: 90kVA, 400 V
 - Back-up fuse: 125 A
 - Pneumatic: 6 bar

Mechanical engineering

A typical gantry design forms the basis of the H series. This basic design results in many accessibility advantages. On the one hand, optimum accessibility is created for the operator. With this design, the operator

stands directly at the table. Furthermore, the 96 tools are placed directly from the opposite side and loading can take place from above. Of course, with the massive dimensioning of 20 tons of machine weight, the best tool life is achieved with maximum workpiece weights of 1.2 tons.

Milling head

The so-called back-sit method reduces the tilting moments to a minimum, so that the best flatness is achieved for large parts. In addition, vibrations and resonances are absorbed, resulting in greatly improved tool life. Combined with grid technology, the milling head meets these requirements with the best dynamics and durability.

Control loop

Of course, we remain loyal to our supplier Heidenhain in full line for you in the H-series as well. Even in the Y-axis we drive with two Heidenhain motors and monitor the positions with two glass scales to eliminate torsion.

Force management

35 kW power in the spindle and linear drive forces of 1.75 tons ensure large reserves even with critical materials. The support elements in the guide shoes themselves are not just balls, but high-quality rollers, so that force transmission takes place at the highest level.

Feed system

The direct drive in all axes is designed with oversized ball screws of $\varnothing 45$ mm. Acceleration to the rapid traverse rate of 60 m/min. is achieved in the shortest possible time. This is done at a very low thread pitch in order to be able to position reliably.

Guide system

The linear roller guides used offer the best reproducibility combined with a long service life. In this machine class, the 45 mm guide dimensioning ensures extremely long tool life and power reserves for emergencies. The wide guideways in all axes ensure consistent results, even with eccentrically clamped workpieces.

Technical Data:

Technical Data:

Control:

[TNC 640](#)

Machine Hours:

5.564 hrs.

Spindle Hours:

1.859 hrs.

Spindle Speed:

18.000 rpm

Tool Holder:

[HSK-A63](#)

Tool Capacity:

96 x

Travels:

X-Axis:
670 mm
Y-Axis:
820mm
Z-Axis:
600 mm

Dimensions and Weight:

Height:
3.500 mm
Width:
5.000 mm
Length:
4.150 mm
Weight:
20.200 kg

Buyer Information:

Condition:
[Very good condition](#)
Availability:
[Sold](#)
Sold as:
[EXW \(Ex Works - Incoterm\)](#)
VAT:
[19 %](#)
Buyers Premium:
[16 %](#)
Location:
Germany


Images:






POSMILL H800U






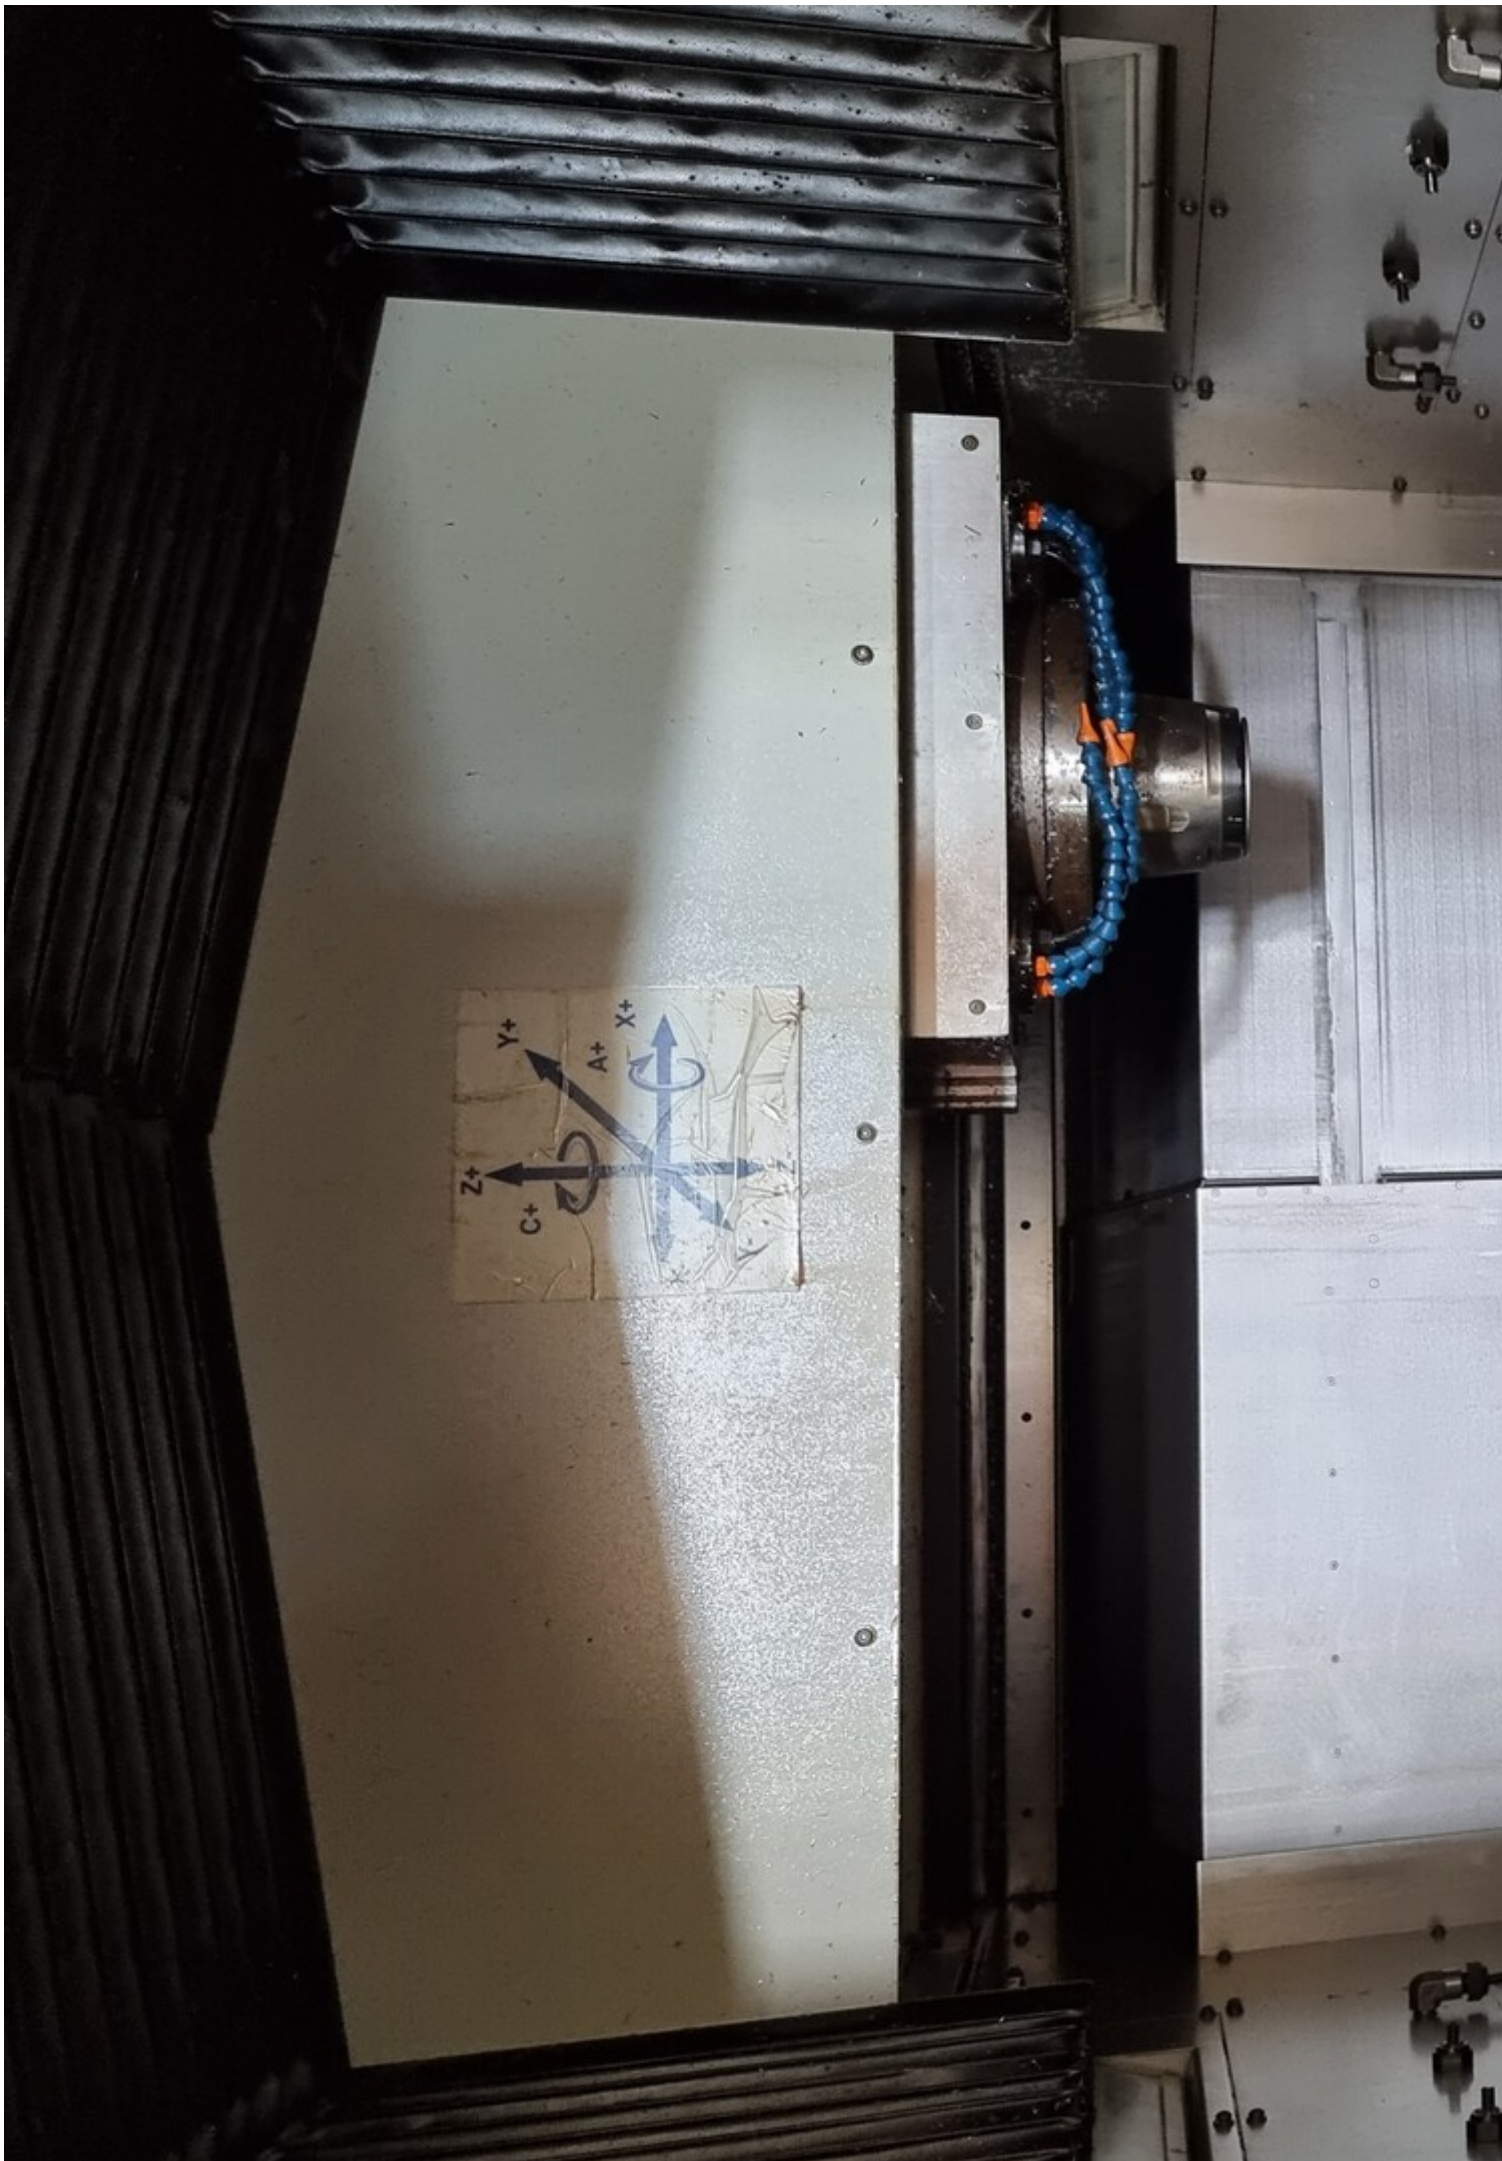

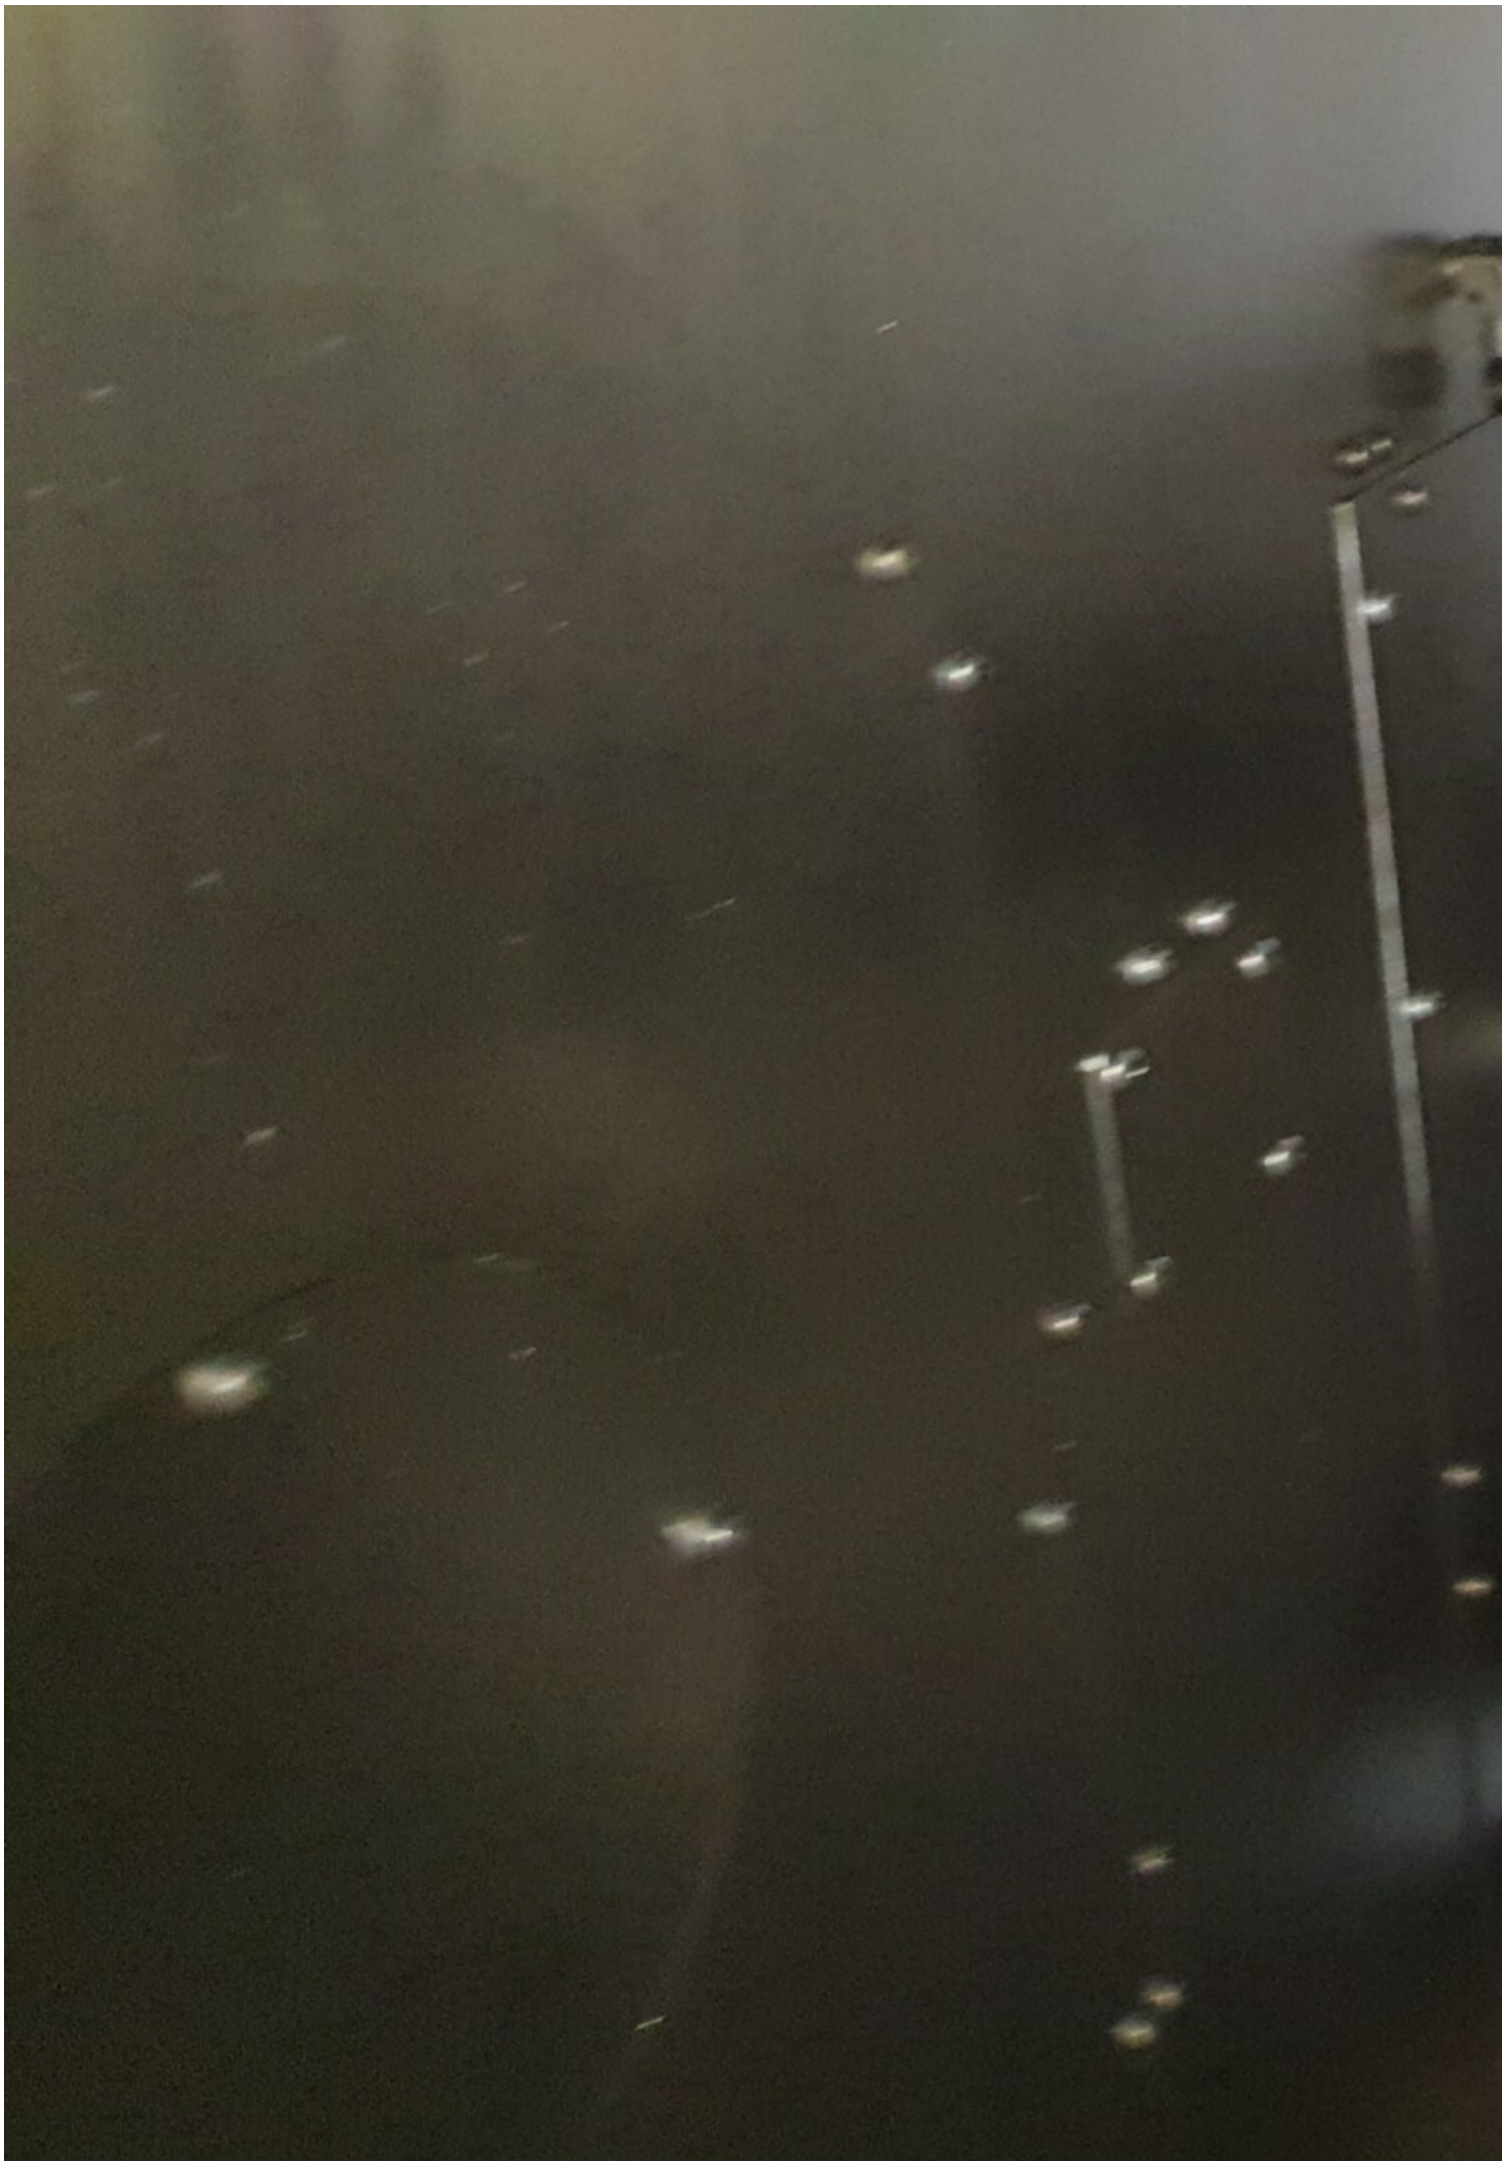

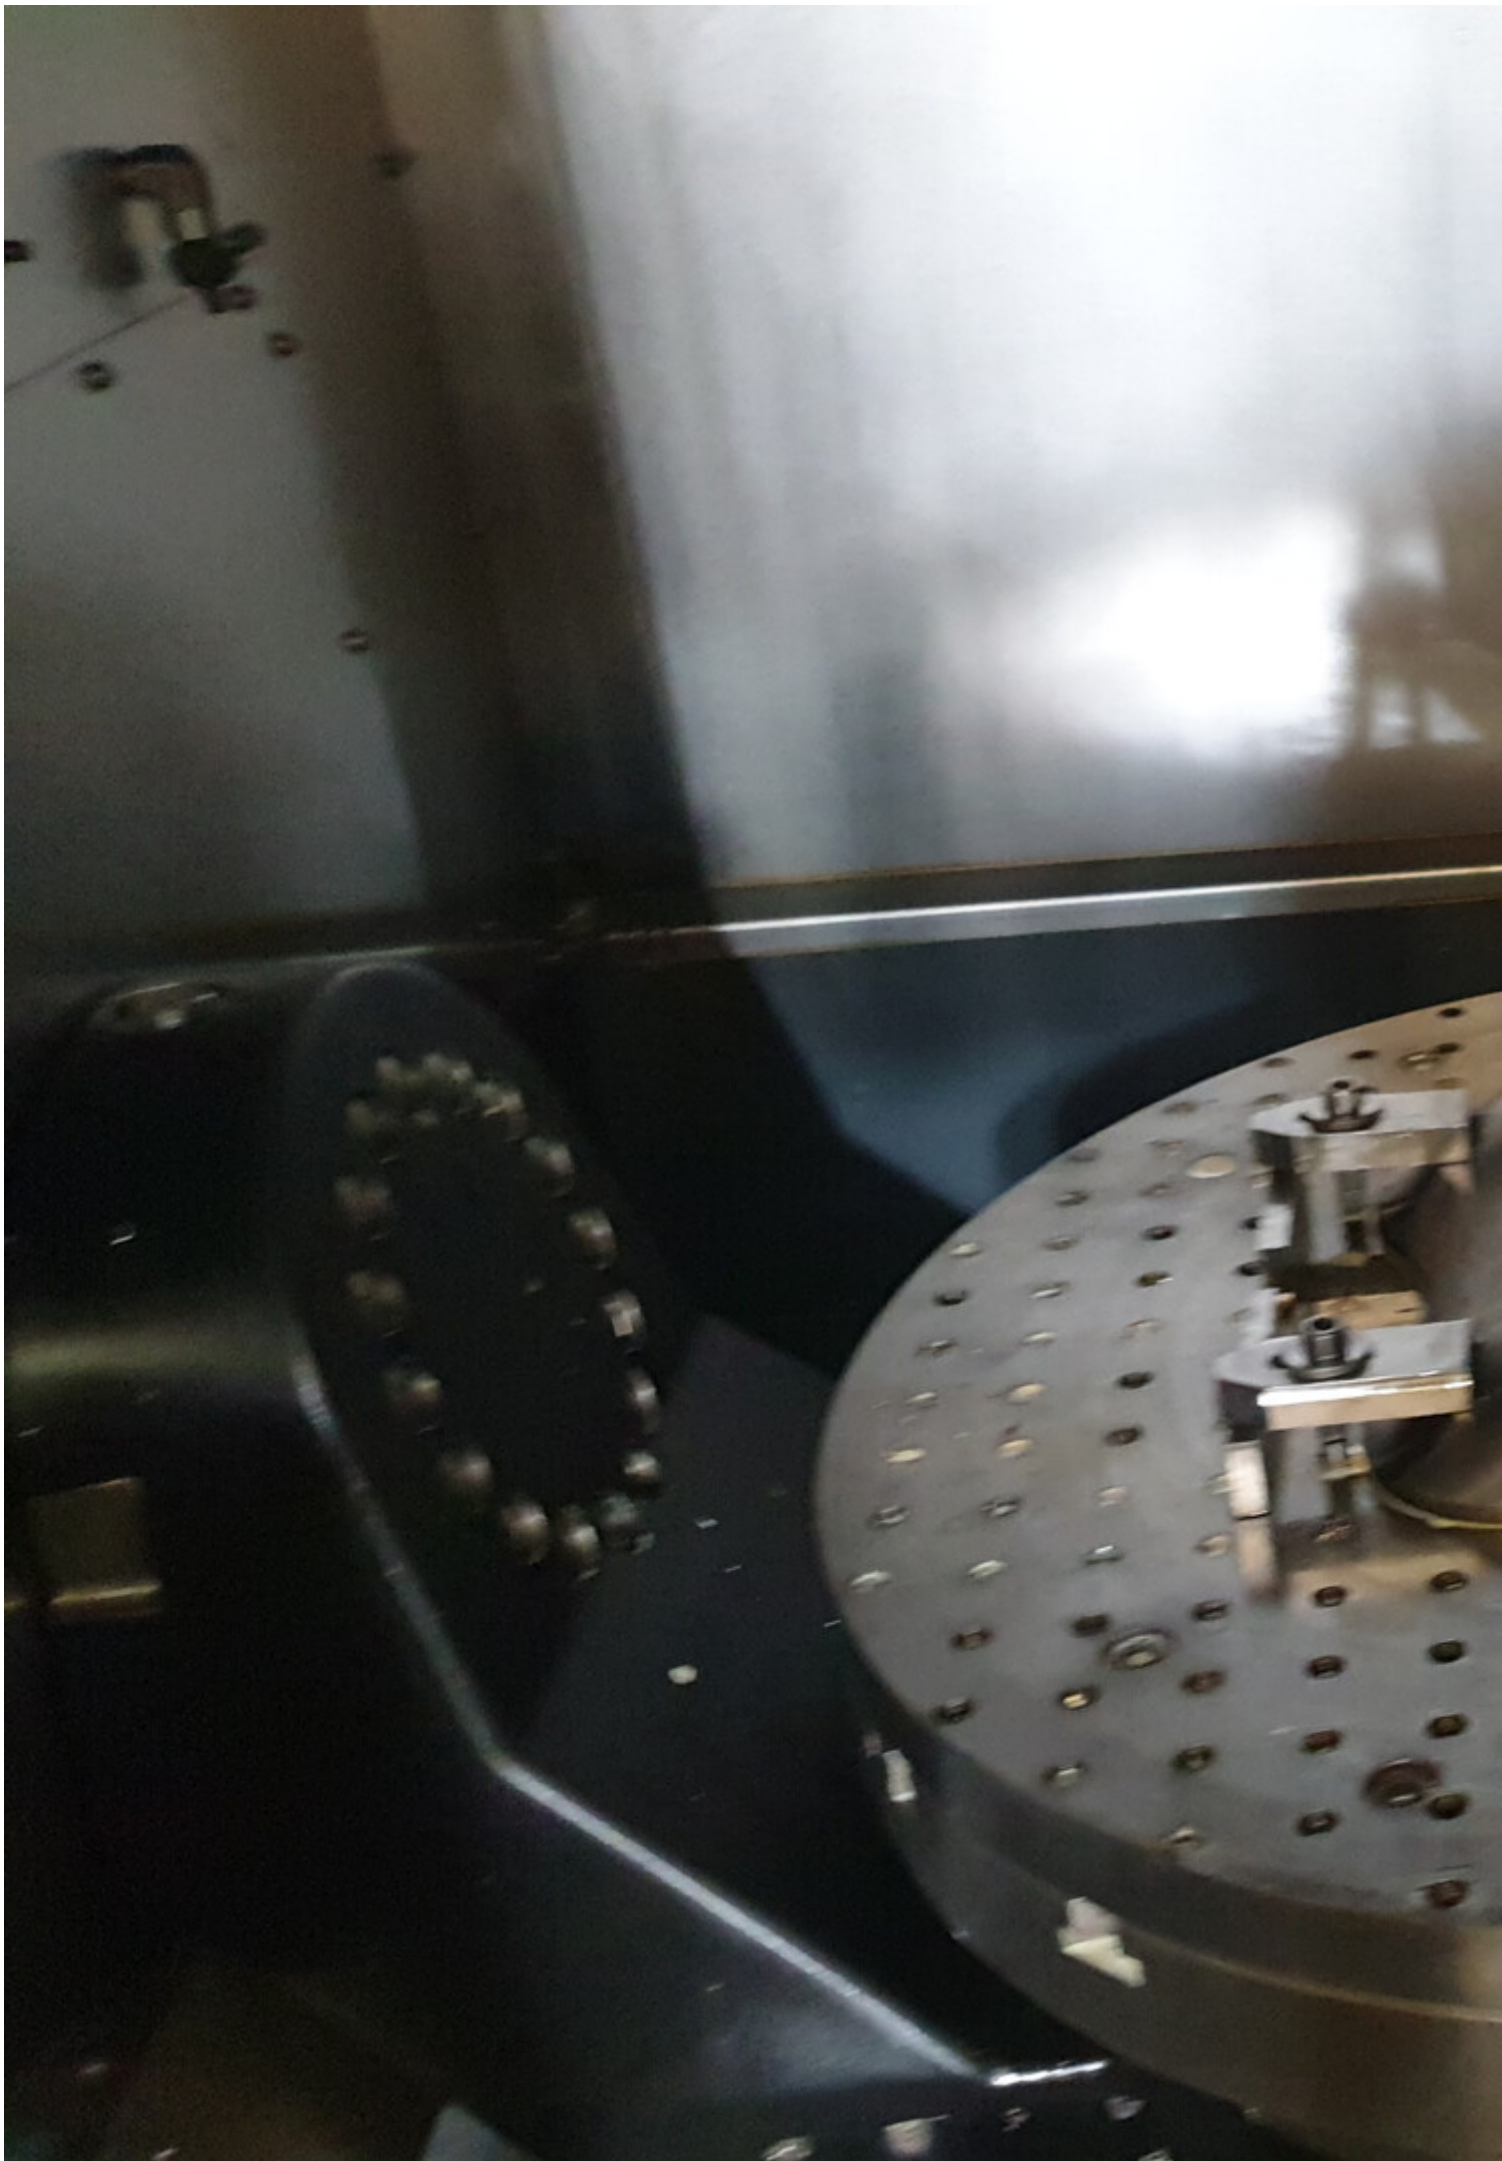




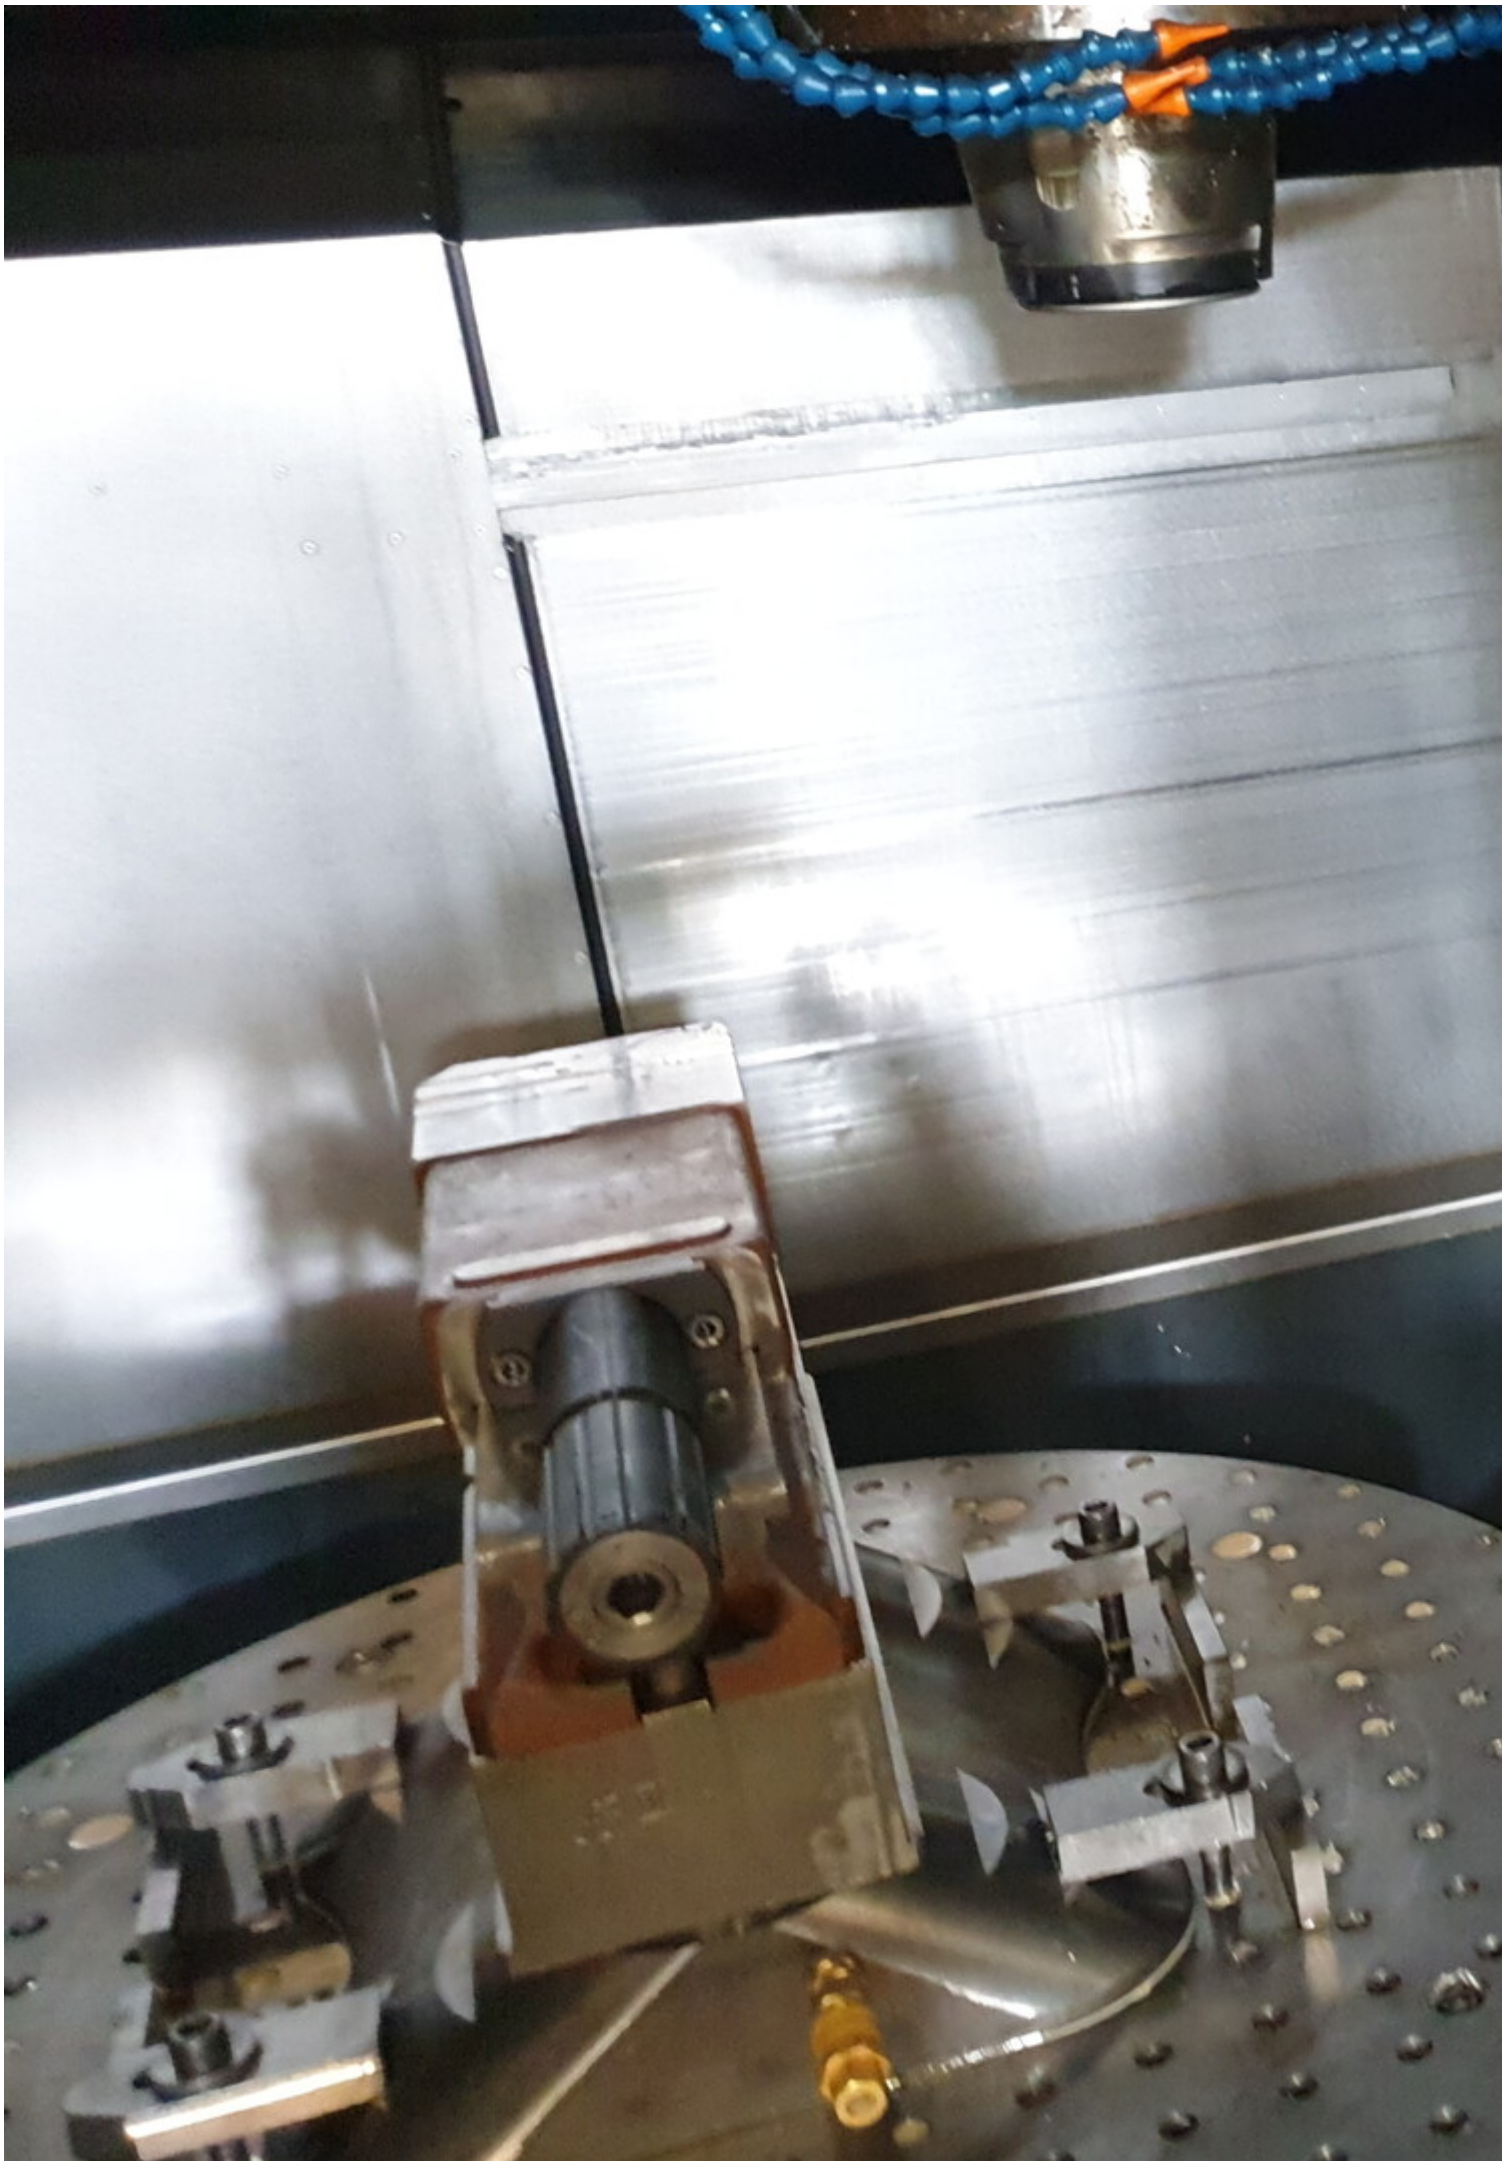



HEIDENHAIN



Strom-Unterbrechung

Programmieren



Einstellungen und Information


- Schlüsselzahl-Eingabe
- Anzeige-Einstellungen
- Grafik-Einstellungen
- Zähler-Einstellungen
- Maschinen-Einstellungen
- System-Einstellungen
- Diagnose-Funktionen
- Allgemeine Information
- Versions-Information
- Lizenz-Information
- Maschinenzeiten**



Maschinenzeiten
Steuerungstyp: TNC640
340530 00 SP3

OK

Schlüsselzahl	
Steuerung ein	5564 : 57 : 58
Maschine ein	5248 : 55 : 11
Programmlauf	2944 : 16 : 35
Hydraulik	5253 : 02 : 31
Achsen	1688 : 43 : 16
Spindel S1	1825 : 18 : 53
Spindel S2	0 : 00 : 00



n
ngen

n

ion

ion

n

Schlüsselzahl:

Steuerung ein

Maschine ein


Programmlauf


Hydraulik

Achsen

Spindel S1

Spindel S2

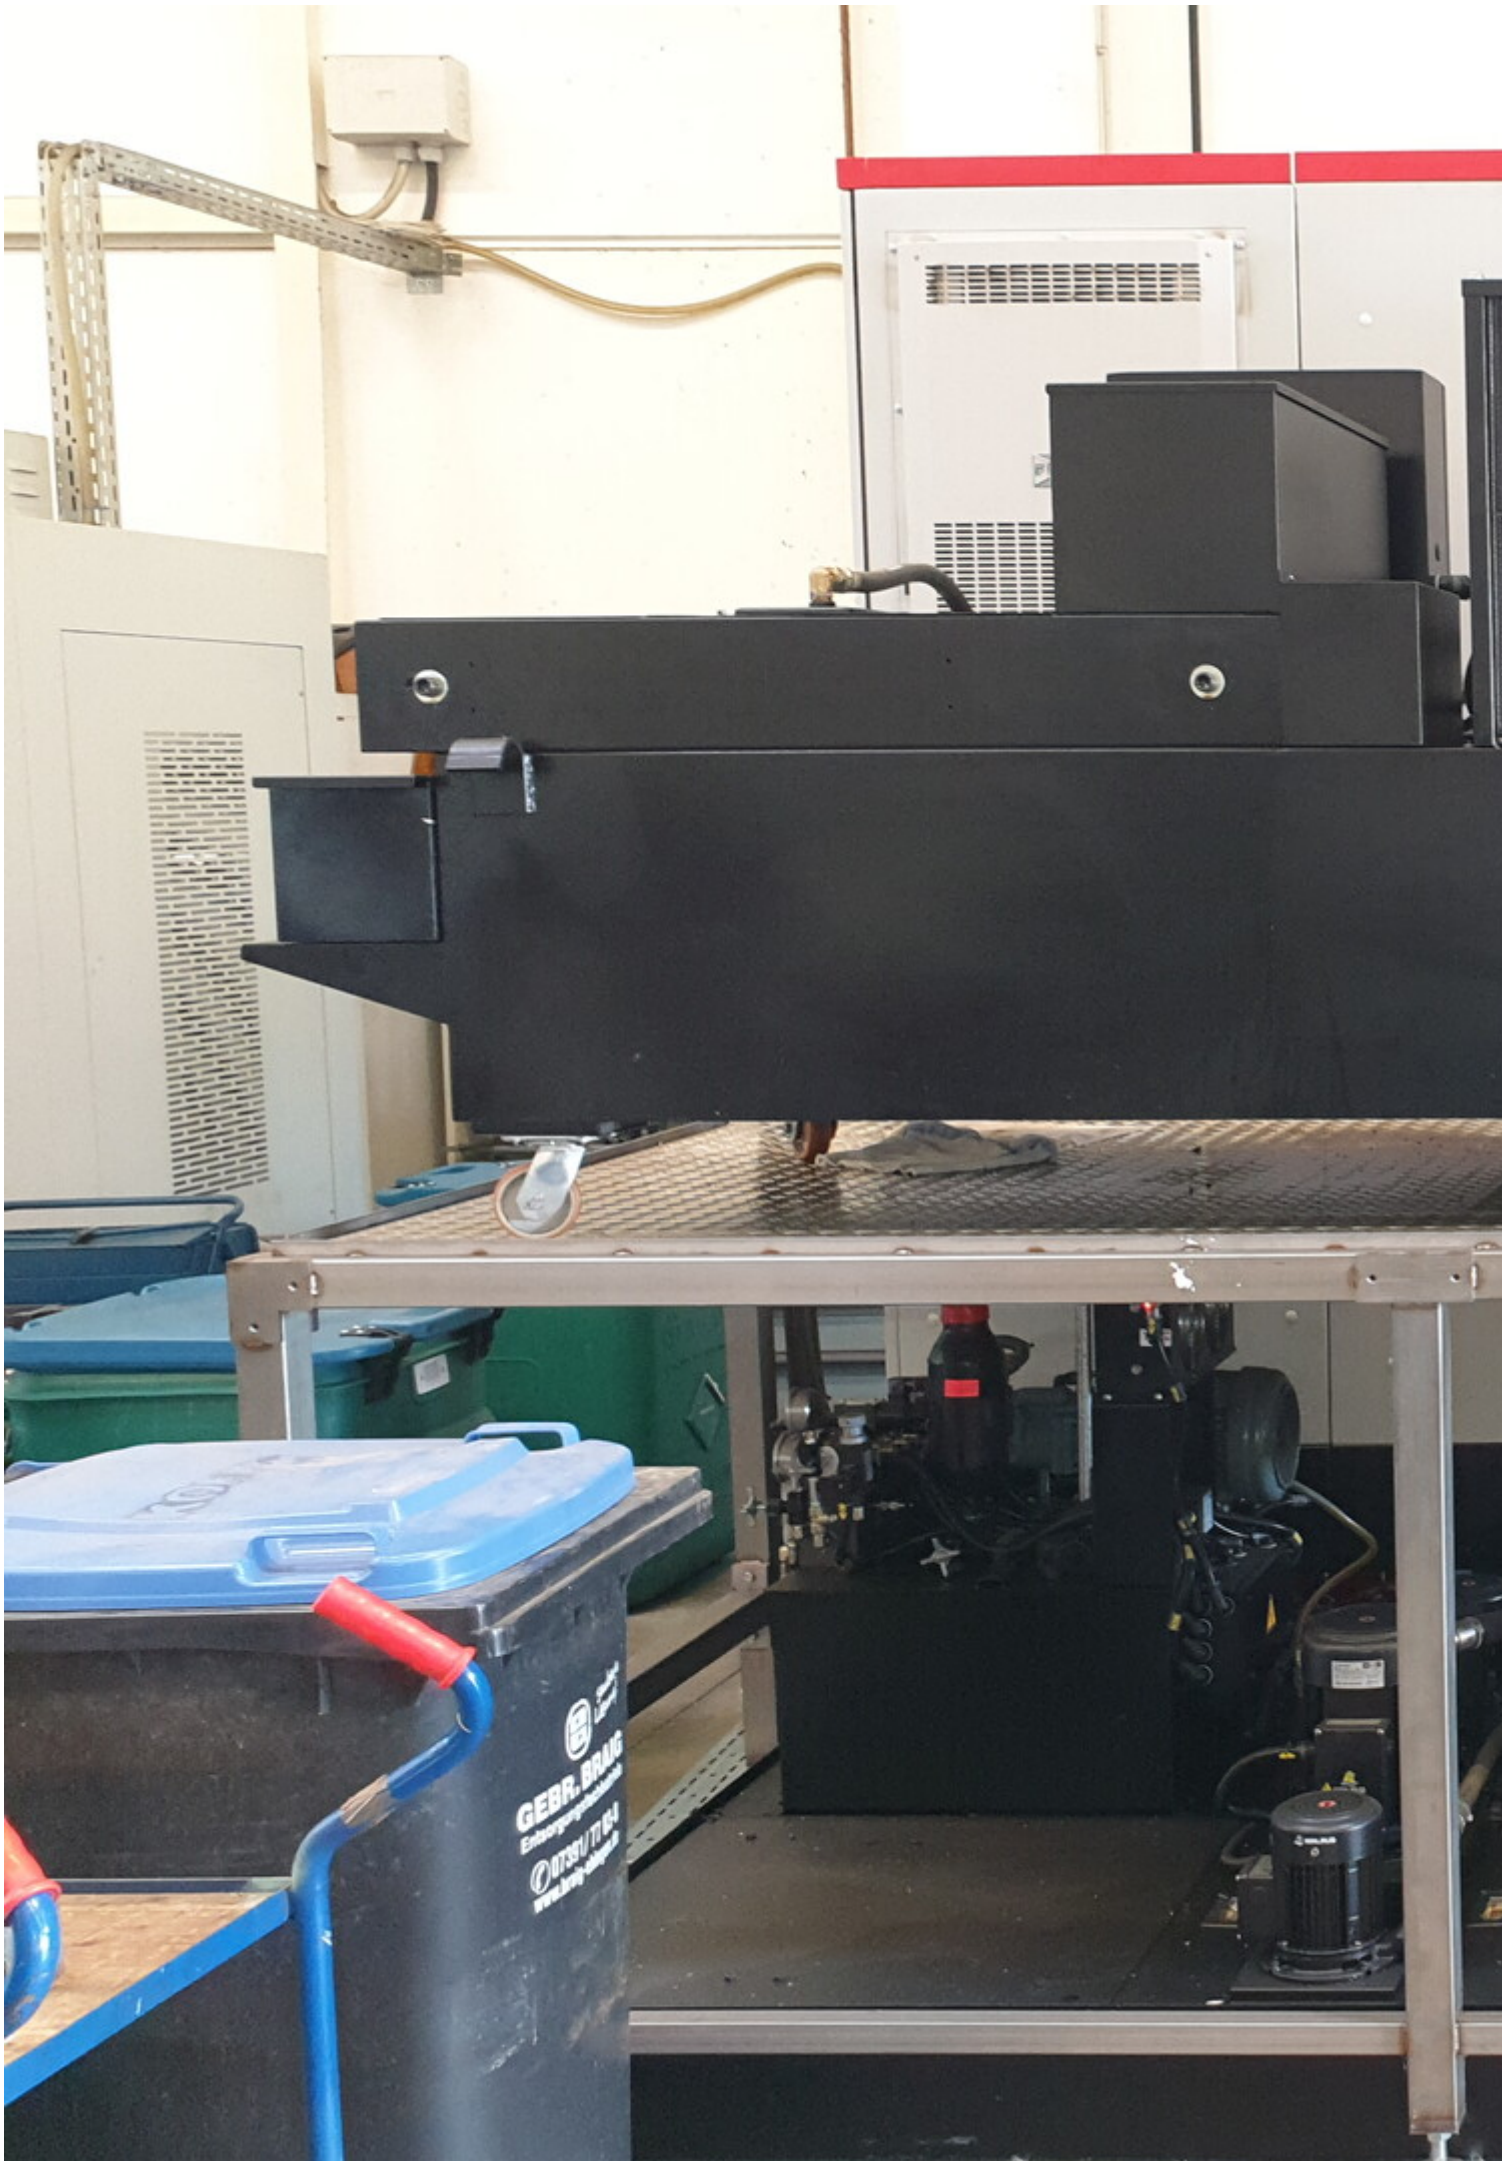

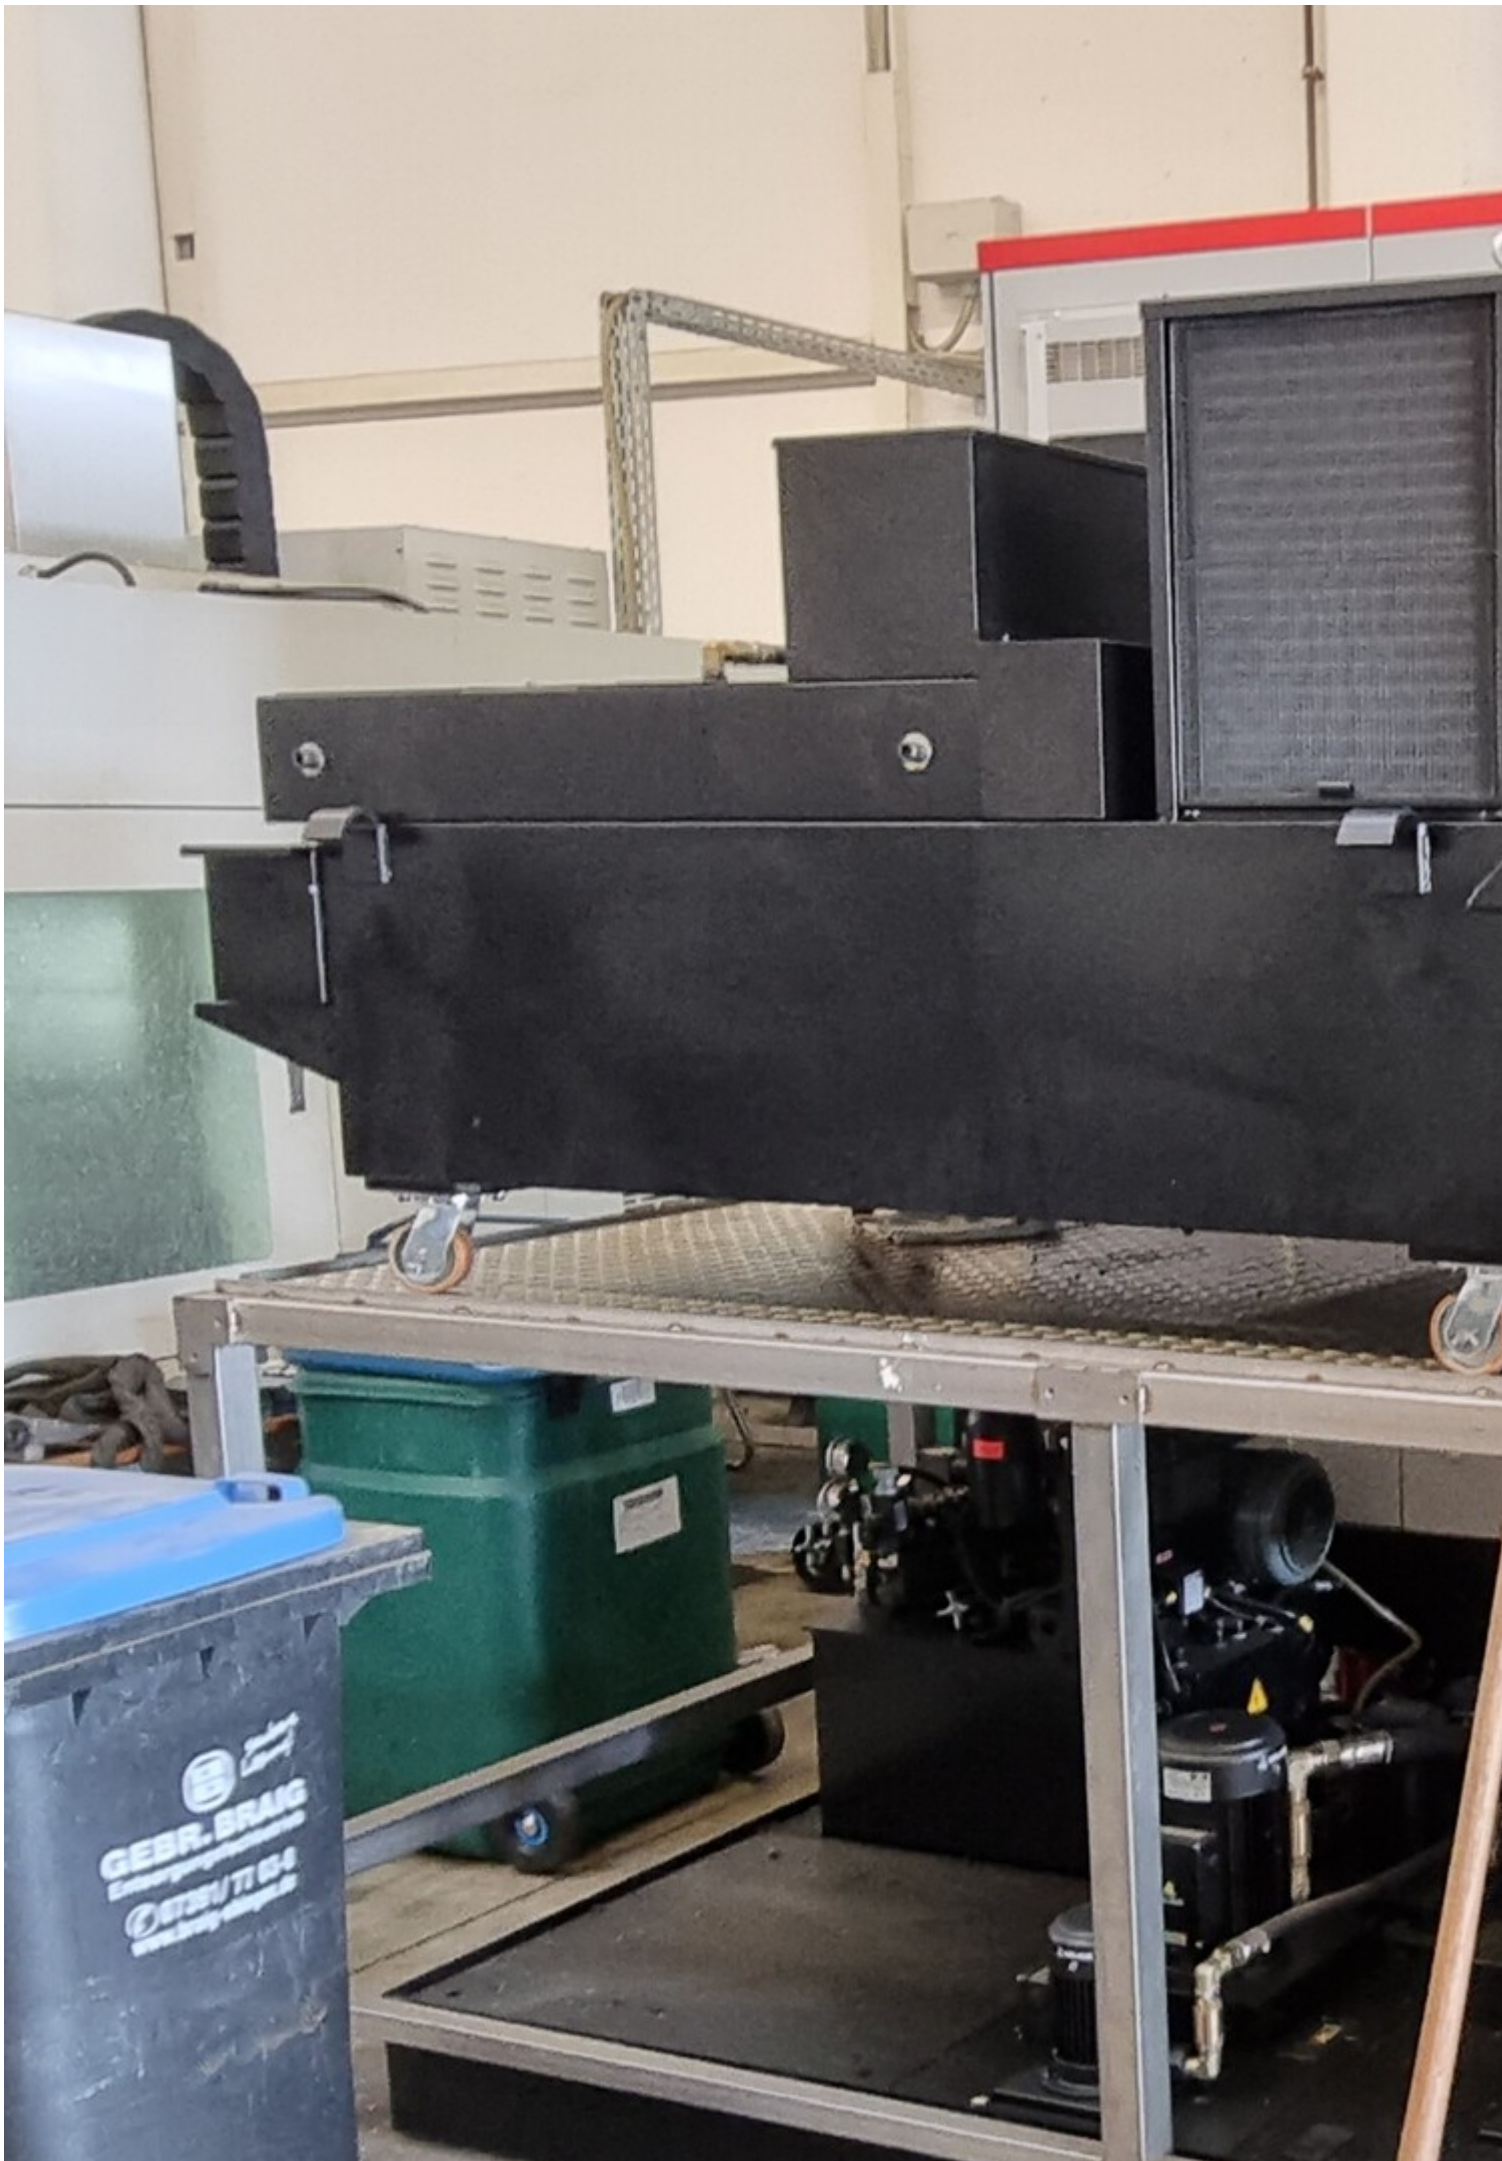


GEBR. BRAIG
Kälte- und Klimatechnik
07141/71154
www.braig-klimatechnik.de

ATTENZIONE

1. Non toccare mai il disco con le mani nude. Il disco è molto caldo e può essere molto pesante. Usare guanti e un sollevatore adeguato. Evitare di sollevare il disco con le mani nude. Il disco è molto caldo e può essere molto pesante. Usare guanti e un sollevatore adeguato. Evitare di sollevare il disco con le mani nude.

ACHTUNG



2. Vor dem Heben des Disks den Drehmomentgeber abstellen und sicherstellen, dass der Motor nicht mehr anläuft. Den Motor abstellen und sicherstellen, dass der Motor nicht mehr anläuft. Den Motor abstellen und sicherstellen, dass der Motor nicht mehr anläuft.

WARNING


3. Do not touch the disk with your bare hands. The disk is very hot and can be very heavy. Use gloves and a proper lifting technique. Do not touch the disk with your bare hands. The disk is very hot and can be very heavy. Use gloves and a proper lifting technique. Do not touch the disk with your bare hands.

ATTENTION!

4. Ne touchez jamais le disque avec vos mains nues. Le disque est très chaud et peut être très lourd. Utilisez des gants et une technique de levage appropriée. Ne touchez jamais le disque avec vos mains nues. Le disque est très chaud et peut être très lourd. Utilisez des gants et une technique de levage appropriée. Ne touchez jamais le disque avec vos mains nues.

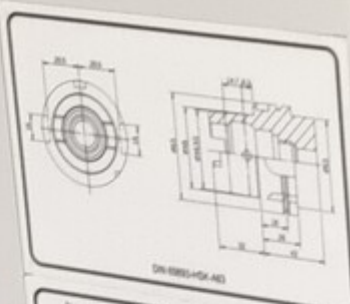




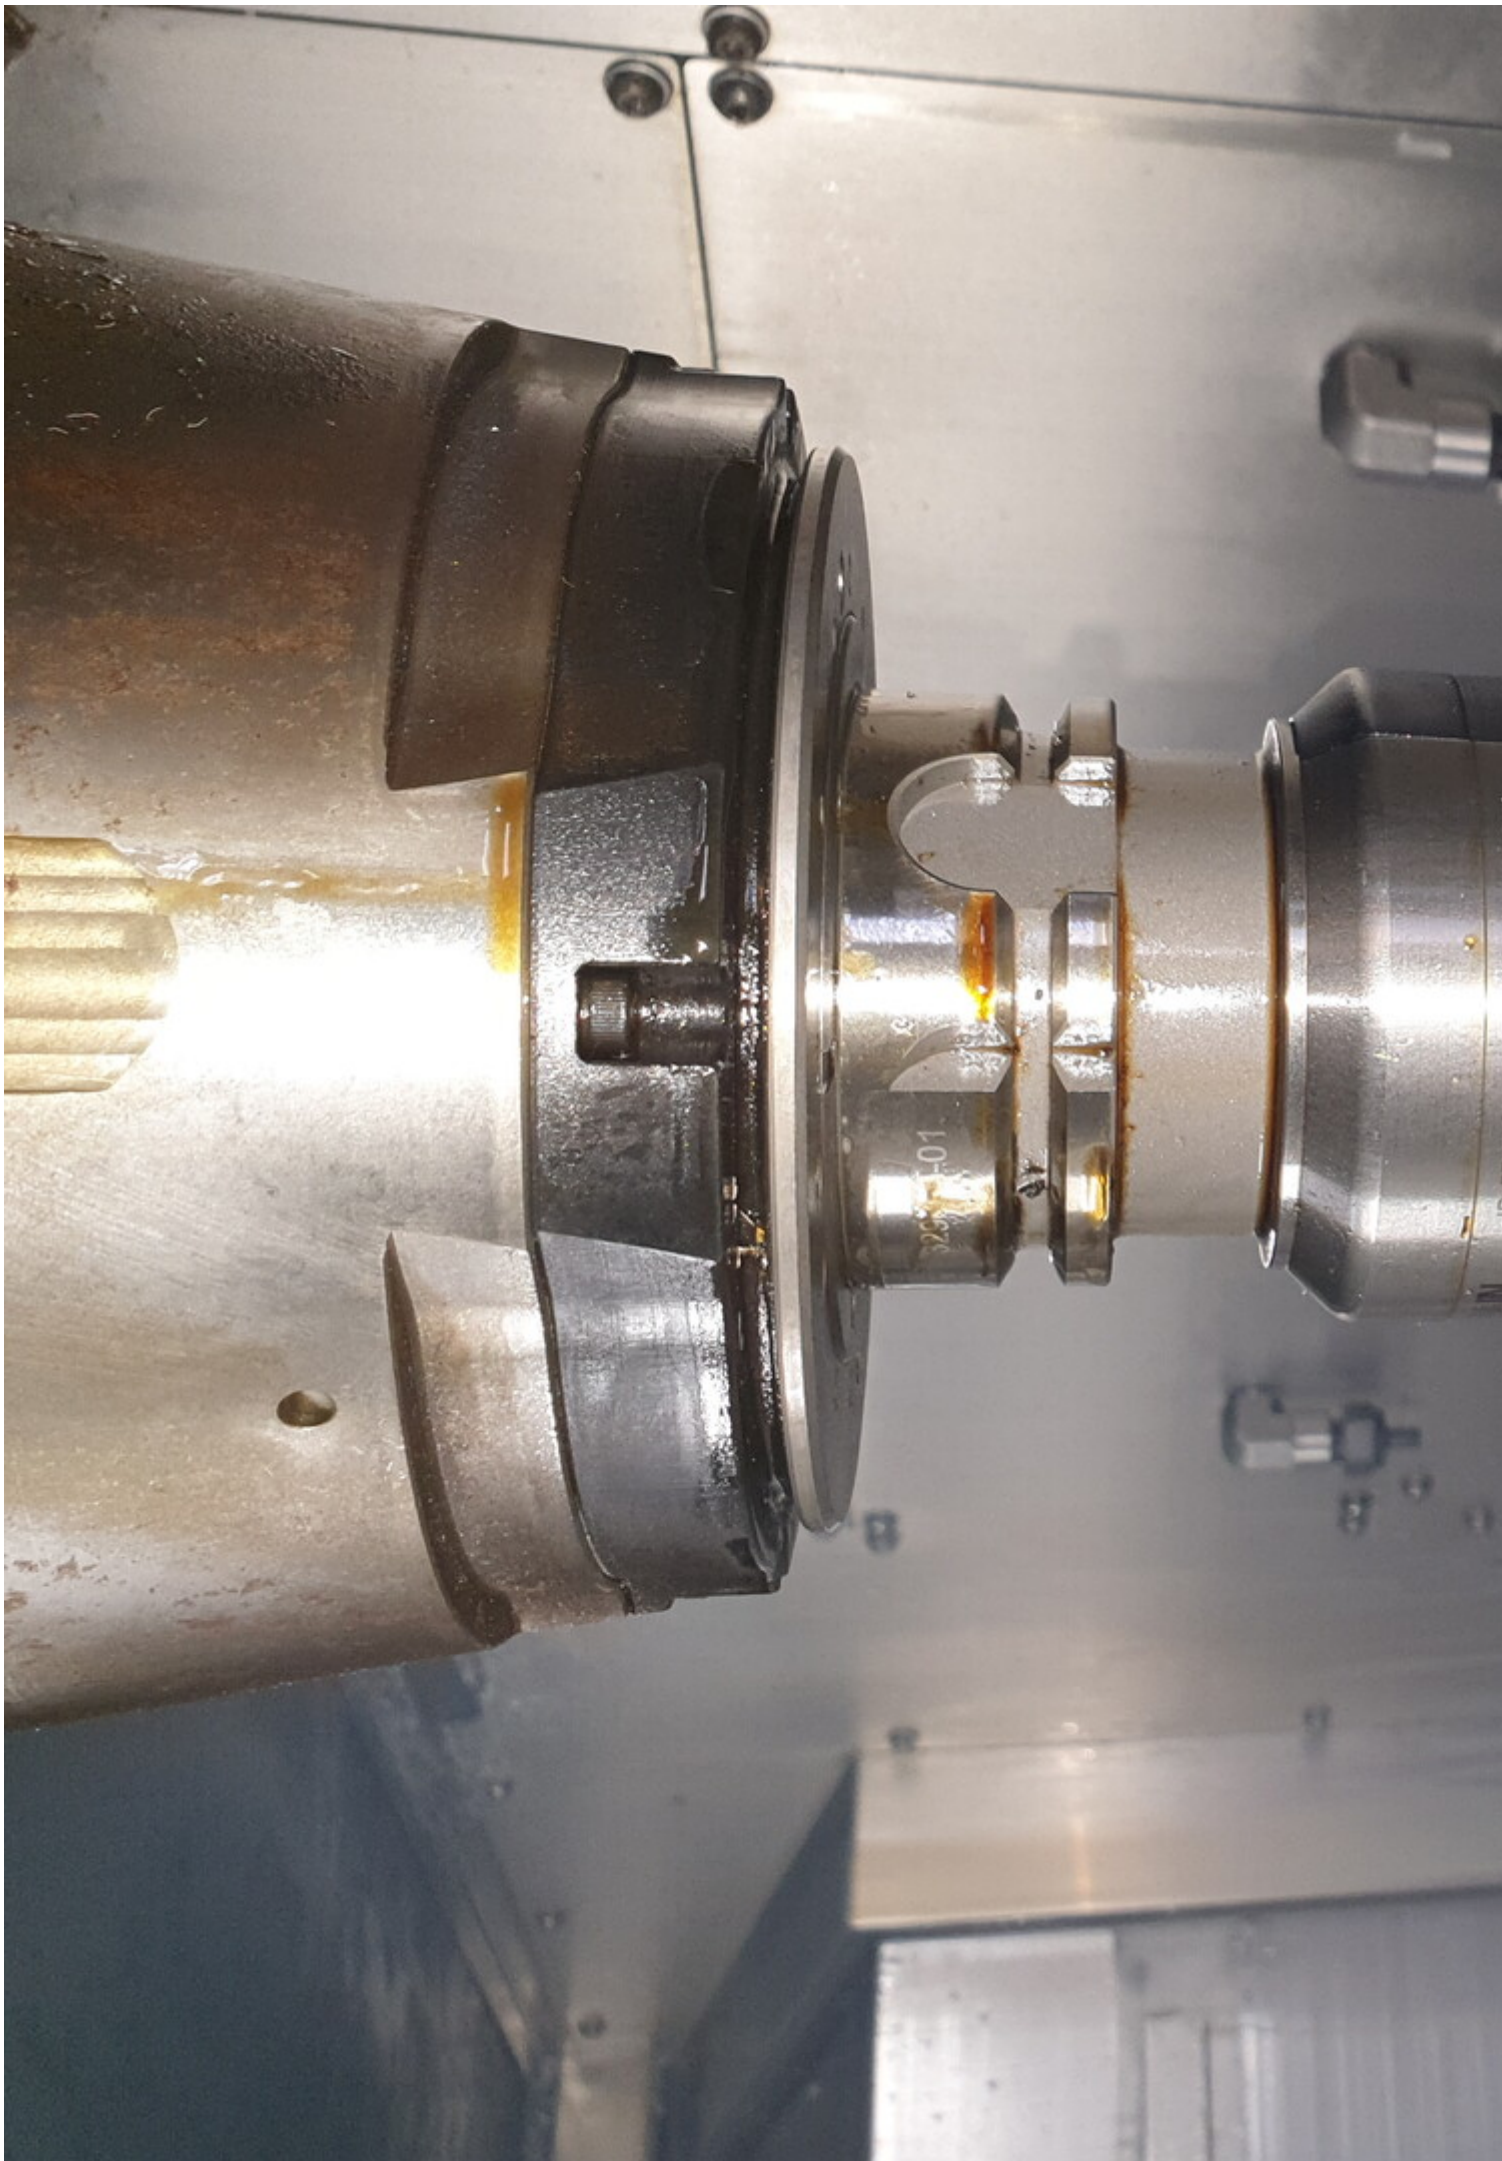



Video:

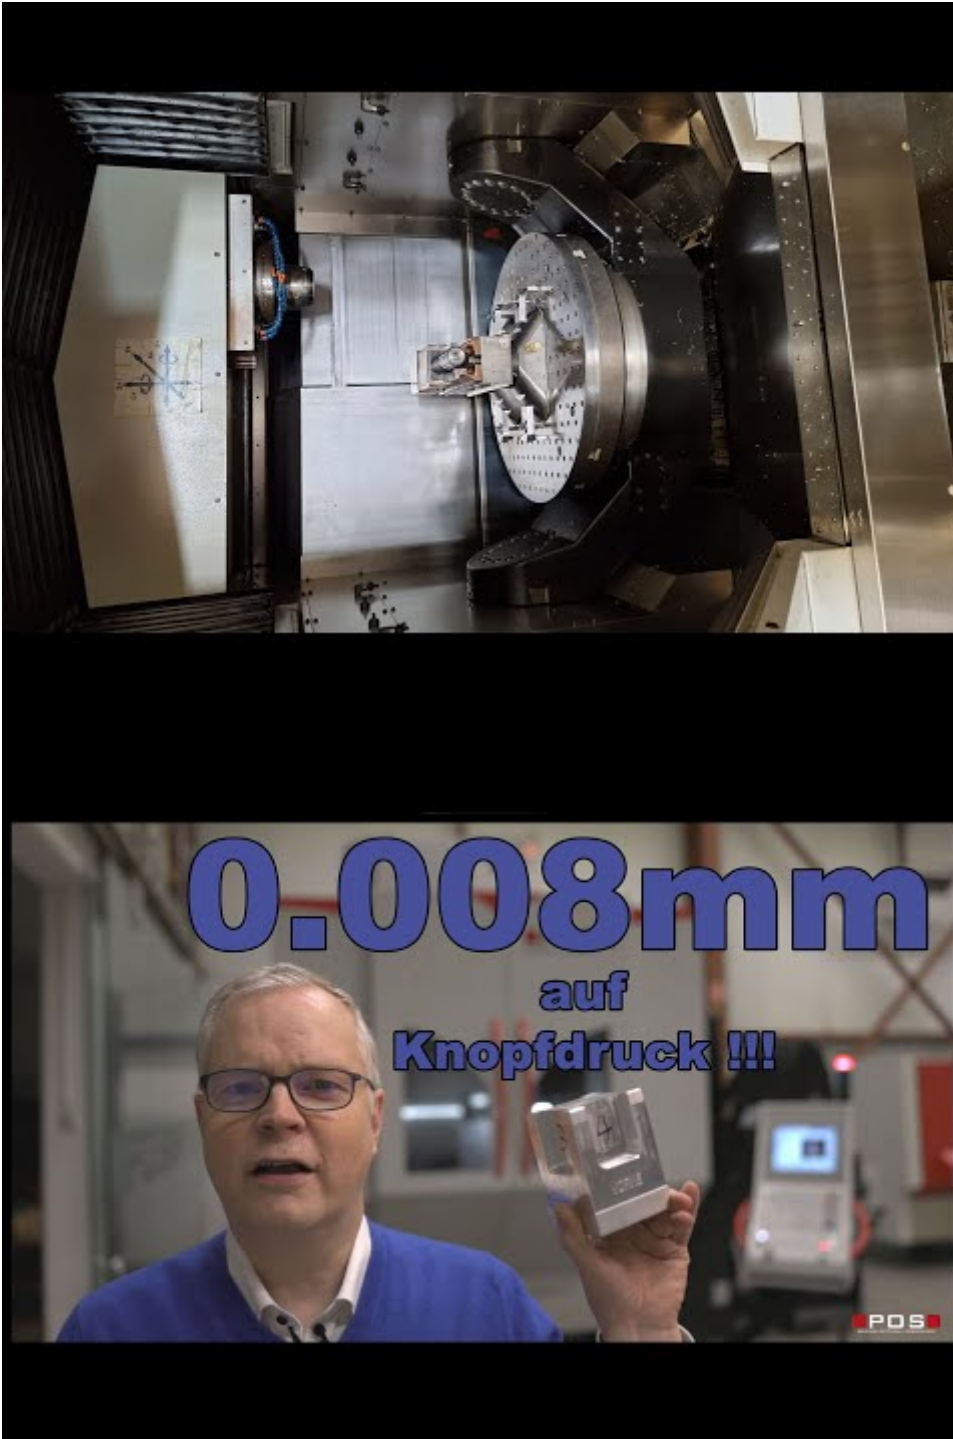



Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Generated on 14.05.2026

© Copyright 2026 - [Asset-Trade](#)

Page