

Image not found or type unknown



Ref. No.:
1343-24101400

Overview and Technical Data:

NTC KFO 650 DD 5-Axis Machine Center

NCT



Year of Build:
Jan 2019

Description:

Used NCT KFO-650 DD 5 Axis machining center

Technica Data:

WORKING AREA:

- Table size: Ø650mm
- Max. workpiece size: Ø520 x 330mm
- Max. workpiece size: Ø520 x 330mm
- T-slot number x size x distance: 5 x 100 x 18mm
- Table load capacity: 300kg
- Spindle nose distance from table surface: 140-600mm

AXIS - Ball screws pretensioned and supported in bearings at both ends

- Number and type of X / Y / Z guideways: Hengergörg's (Roller)
- X travel: 620mm
- Y travel: 520mm
- Z travel: 460mm
- B axis: $- 50^{\circ} / +110^{\circ}$
- C axis: 360°
- Rapid travel speed max. of X / Y / Z axis: 36 / 36 / 36m/min
- Max. feed rate: 15m/min
- B / C clamping torque: 5000 / 3700Nm
- B / C axis indexing resolution: $0,001^{\circ}$

ACCURACY:

- B / C indexing accuracy: $16'' / 8''' / \text{sec}$
- B / C axis repeatability accuracy: $8'' / 4''' / \text{sec}$

SPINDLE:

- Max.speed (standard): 15.000RPM
- Spindle taper size (standard): #40
- Tooling: BIG PLUS SK40

- Drive: Direkt
- Headstock cooling: Oil cooling

SPINDLE MOTOR:

- Rated Power (standard): 20 kW
- MAX Power (standard): 29 kW
- Rated torque (standard): 72 Nm
- MAX torque (standard): 106 Nm
- Oilcooler
- Direct drive spindle (W/O belt drive)
- Direct or Motorspindle driven
- Liquid cooled spindle motor Higher torque and longer life
- BIG-PLUS SK40 type tooling
- Headstock thermal stabilization with digital oil cooler
- Spindle bearing protection by compressed air

TOOL MAGAZINE:

- Magazine type: Karos
- Number of tool positions: 32 (40 60 opt)
- Max. tool length: 250 (300 opc.) mm
- Max. tool diameter: 75 / 125 mm
- Max. tool weight: 7 kg

INSTALLATION :

- Floor space x height: 4250 x 4120 x 2980 mm
- Net machine weight: 8500 kg

- Power Consumption:45
- Electrical connection: 3 x 400 VAC VA
- Air connection: 6 g/cm²

STANDARD ACCESSORIES:

- Arm type, ATC
- Spindle bearing protection by compressed air
- Levelling pads and bolts
- Three colour status lamp
- Light for working area
- Double LED lights
- Chip conveyor and trolley
- Air cooling
- Watergun operated by push button
- Airgun connection

CONTROL AND ELECTRONICS:

- NCT 304 Controller 19" touchscreen
- External swing-aside control panel
- External handwheel
- HEIDENHAIN Direct measuring system (absolute)

CONSTRUCTION:

- Heavy cast iron bed, column and slides
- Mounted, precision, roller type (R) bearing linear guideway on all axis
- Without counterweight
- TABLE:
- Integrated two axis rotary table
- Direkt Drive (DD) rotary table
- TORQUE motor driven (DD) Rotary table MILL / TURN function
- TORQUE motor driven (DD) Rotary table MILL / TURN function

MAGAZINE:

- Chain type magazine with arm toolchanger, separated from the working space
- EnDat 2.2 absolute measuring system, 0,00005 mm positioning resolution and nano interpolation
- 3+2D, or 5D CNC control

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Spindle Speed:

15.000 rpm

Tool Holder:

[SK40](#)

Tool Capacity:

32 x

Travels:

X-Axis:

620 mm

Y-Axis:

520mm

Z-Axis:

460 mm

Dimensions and Weight:

Height:

2.980 mm

Width:

4.120 mm

Length:

4.250 mm

Weight:

9.000 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:

[18 %](#)


Location:

Hungary

Images:

KFO-650DD



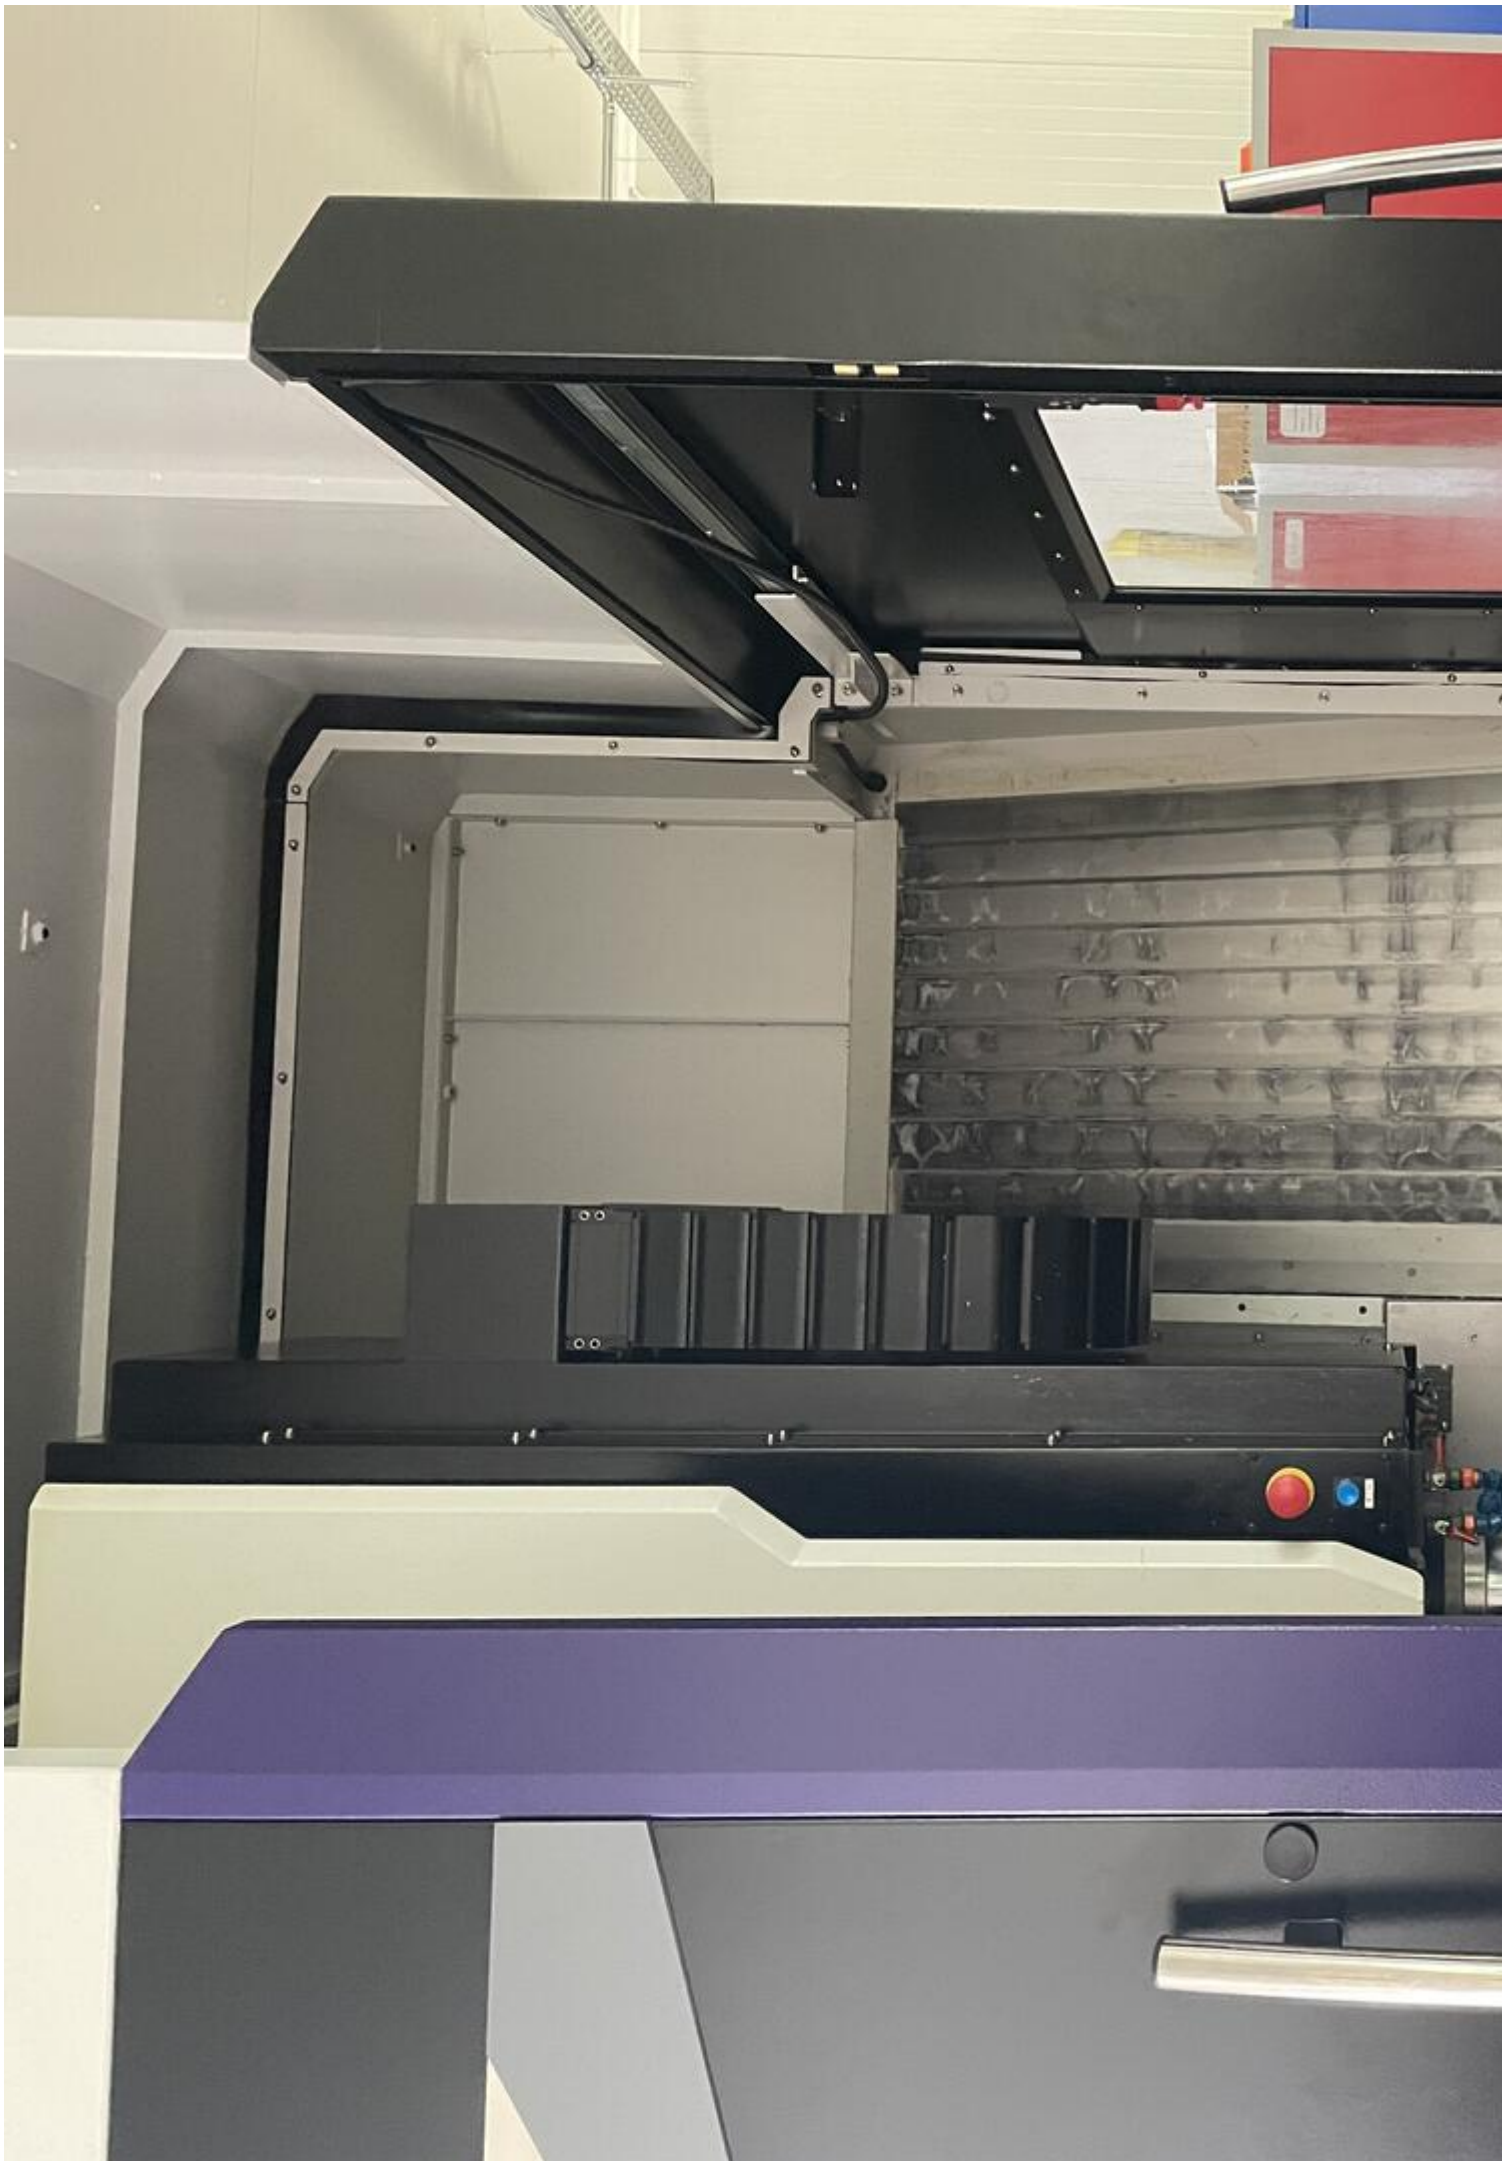


NC

KFO-650DD





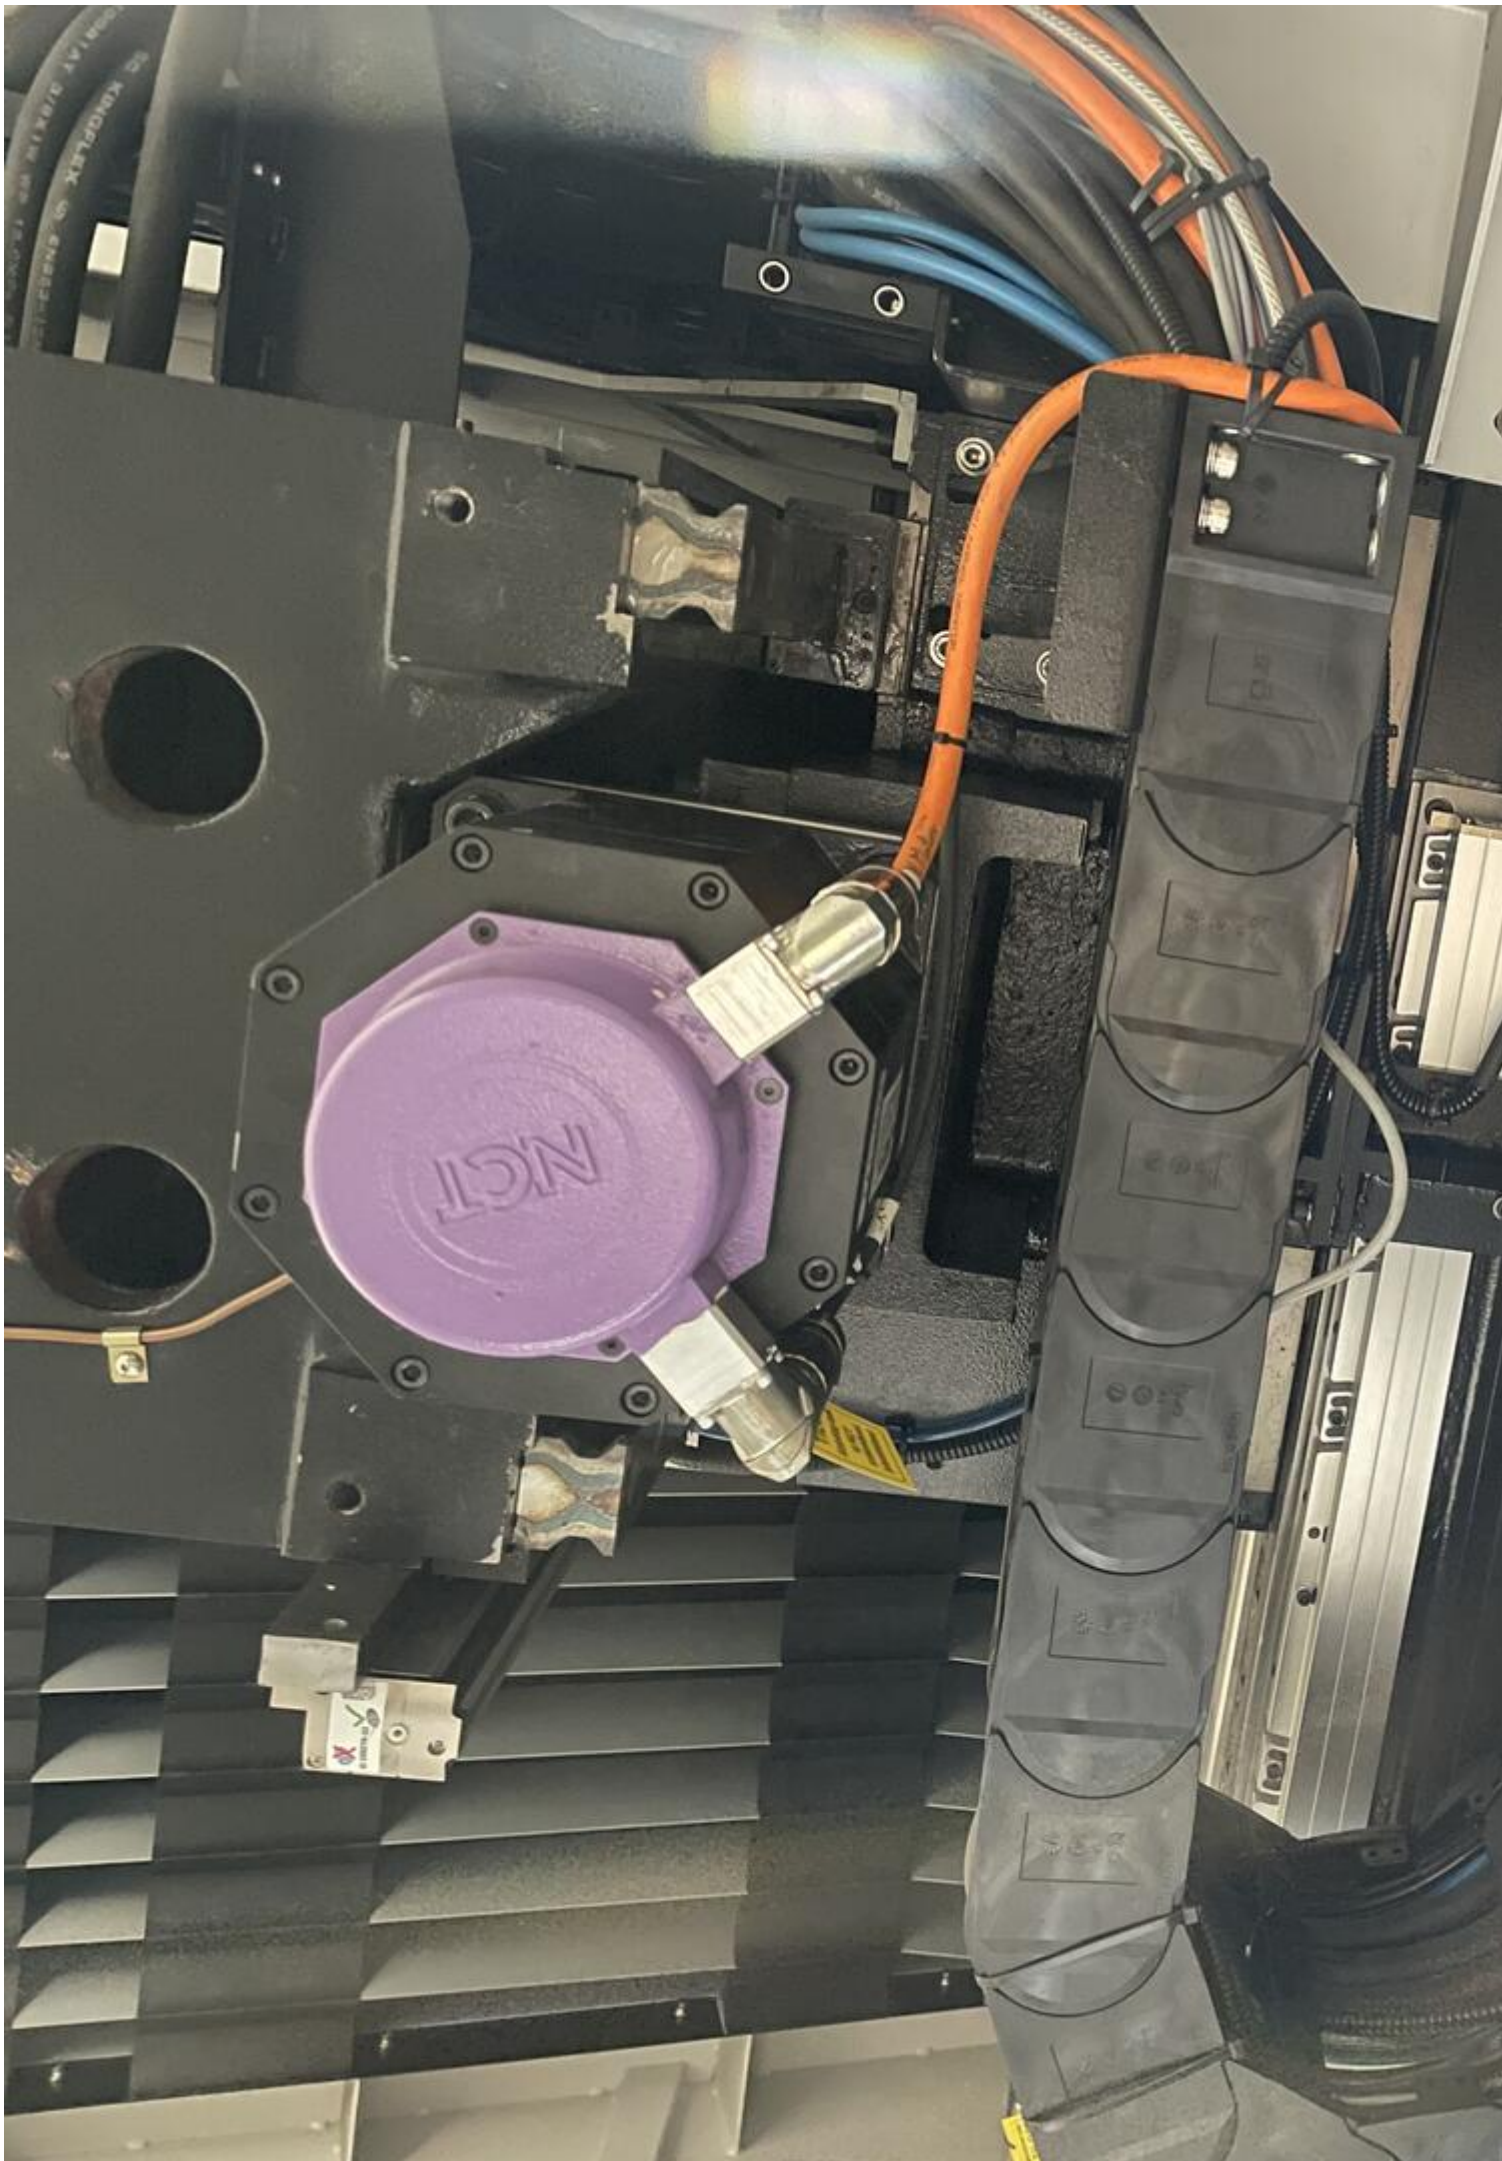





R407C

HAPOX
No. B-MF-6D22W
C
RECYCLED
MADE IN TAIWAN
energy

HAPOX
No. B-MF-6D22W
C
RECYCLED
MADE IN TAIWAN
energy

PC
C
Energy





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Ref. No.:
1343-24101400

Overview and Technical Data:

NTC KFO 650 DD 5-Axis Machine Center

[NCT](#)



Year of Build:
Jan 2019

Description:

Used NCT KFO-650 DD 5 Axis machining center

Technica Data:

WORKING AREA:

- Table size: Ø650mm
- Max. workpiece size: Ø520 x 330mm
- Max. workpiece size: Ø520 x 330mm
- T-slot number x size x distance: 5 x 100 x 18mm
- Table load capacity: 300kg
- Spindle nose distance from table surface: 140-600mm

AXIS - Ball screws pretensioned and supported in bearings at both ends

- Number and type of X / Y / Z guideways: Hengergörg?s (Roller)
- X travel: 620mm
- Y travel: 520mm

- Z travel: 460mm
- B axis: - 50°/ +110°
- C axis: 360°
- Rapid travel speed max. of X / Y / Z axis: 36 / 36 / 36m/min
- Max. feed rate: 15m/min
- B / C clamping torque: 5000 / 3700Nm
- B / C axis indexing resolution: 0,001°

ACCURACY:

- B / C indexing accuracy: 16" / 8"/sec
- B / C axis repeatability accuracy: 8" / 4"/sec

SPINDLE:

- Max.speed (standard): 15.000RPM
- Spindle taper size (standard): #40
- Tooling: BIG PLUS SK40
- Drive: Direkt
- Headstock cooling: Oil cooling

SPINDLE MOTOR:

- Rated Power (standard): 20 kW

- MAX Power (standard): 29 kW
- Rated torque (standard): 72 Nm
- MAX torque (standard): 106 Nm
- Oilcooler
- Direct drive spindle (W/O belt drive)
- Direct or Motorspindle driven
- Liquid cooled spindle motor Higher torque and longer life
- BIG-PLUS SK40 type tooling
- Headstock thermal stabilization with digital oil cooler
- Spindle bearing protection by compressed air

TOOL MAGAZINE:

- Magazine type: Karos
- Number of tool positions: 32 (40 60 opt)
- Max. tool length: 250 (300 opc.) mm
- Max. tool diameter: 75 / 125 mm
- Max. tool weight: 7 kg

INSTALLATION :

- Floor space x height: 4250 x 4120 x 2980 mm
- Net machine weight: 8500 kg
- Power Consumption:45
- Electrical connection: 3 x 400 VAC VA
- Air connection: 6 g/cm²

STANDARD ACCESSORIES:

- Arm type, ATC
- Spindle bearing protection by compressed air
- Levelling pads and bolts
- Three colour status lamp
- Light for working area
- Double LED lights
- Chip conveyor and trolley
- Air cooling
- Watergun operated by push button
- Airgun connection

CONTROL AND ELECTRONICS:

- NCT 304 Controller 19" touchscreen
- External swing-aside control panel
- External handwheel
- HEIDENHAIN Direct measuring system (absolute)

CONSTRUCTION:

- Heavy cast iron bed, column and slides
- Mounted, precision, roller type (R) bearing linear guideway on all axis
- Without counterweight
- TABLE:
- Integrated two axis rotary table
- Direkt Drive (DD) rotary table
- TORQUE motor driven (DD) Rotary table MILL / TURN function
- TORQUE motor driven (DD) Rotary table MILL / TURN function

MAGAZINE:

- Chain type magazine with arm toolchanger, separated from the working space
- EnDat 2.2 absolute measuring system, 0,00005 mm positioning resolution and nano interpolation
- 3+2D, or 5D CNC control

Technical Data:

Technical Data:

Control:

[TNC 530](#)

Spindle Speed:

15.000 rpm

Tool Holder:

[SK40](#)

Tool Capacity:

32 x

Travels:

X-Axis:

620 mm

Y-Axis:

520mm

Z-Axis:

460 mm

Dimensions and Weight:

Height:

2.980 mm

Width:

4.120 mm

Length:

4.250 mm

Weight:

9.000 kg

Buyer Information:

Condition:

[Very good condition](#)

Availability:

[Immediately](#)

Sold as:

[EXW \(Ex Works - Incoterm\)](#)

VAT:

[19 %](#)

Buyers Premium:


[18 %](#)

Location:
Hungary

Images:

KFO-650DD



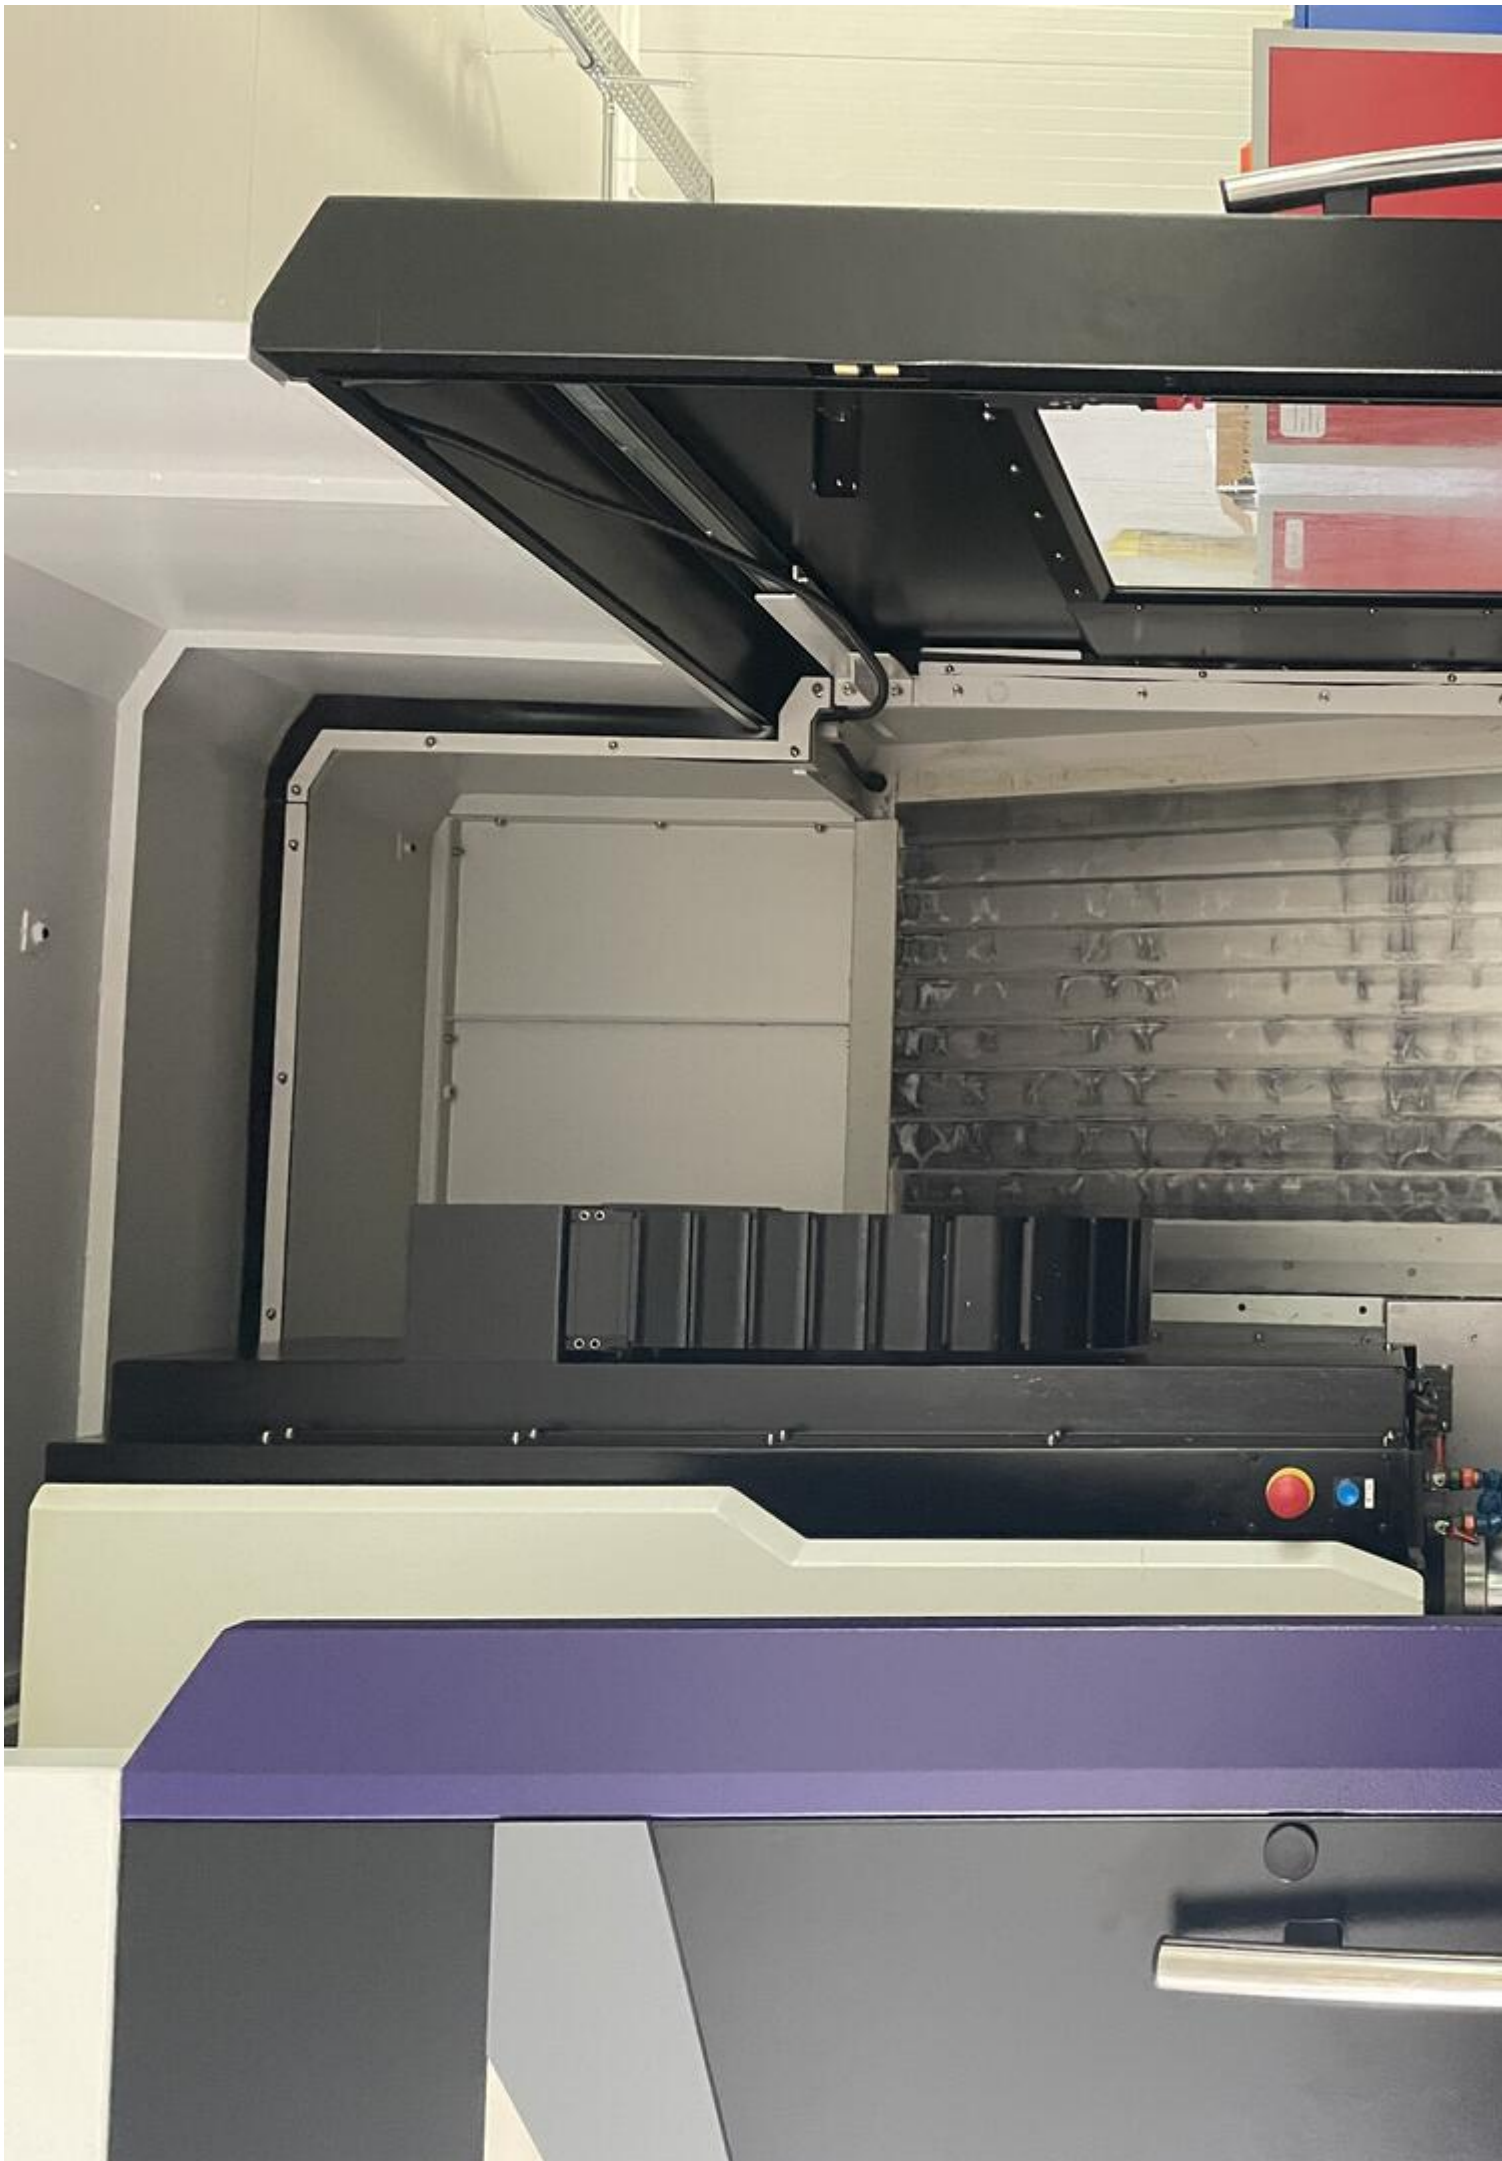


NC

KFO-650DD





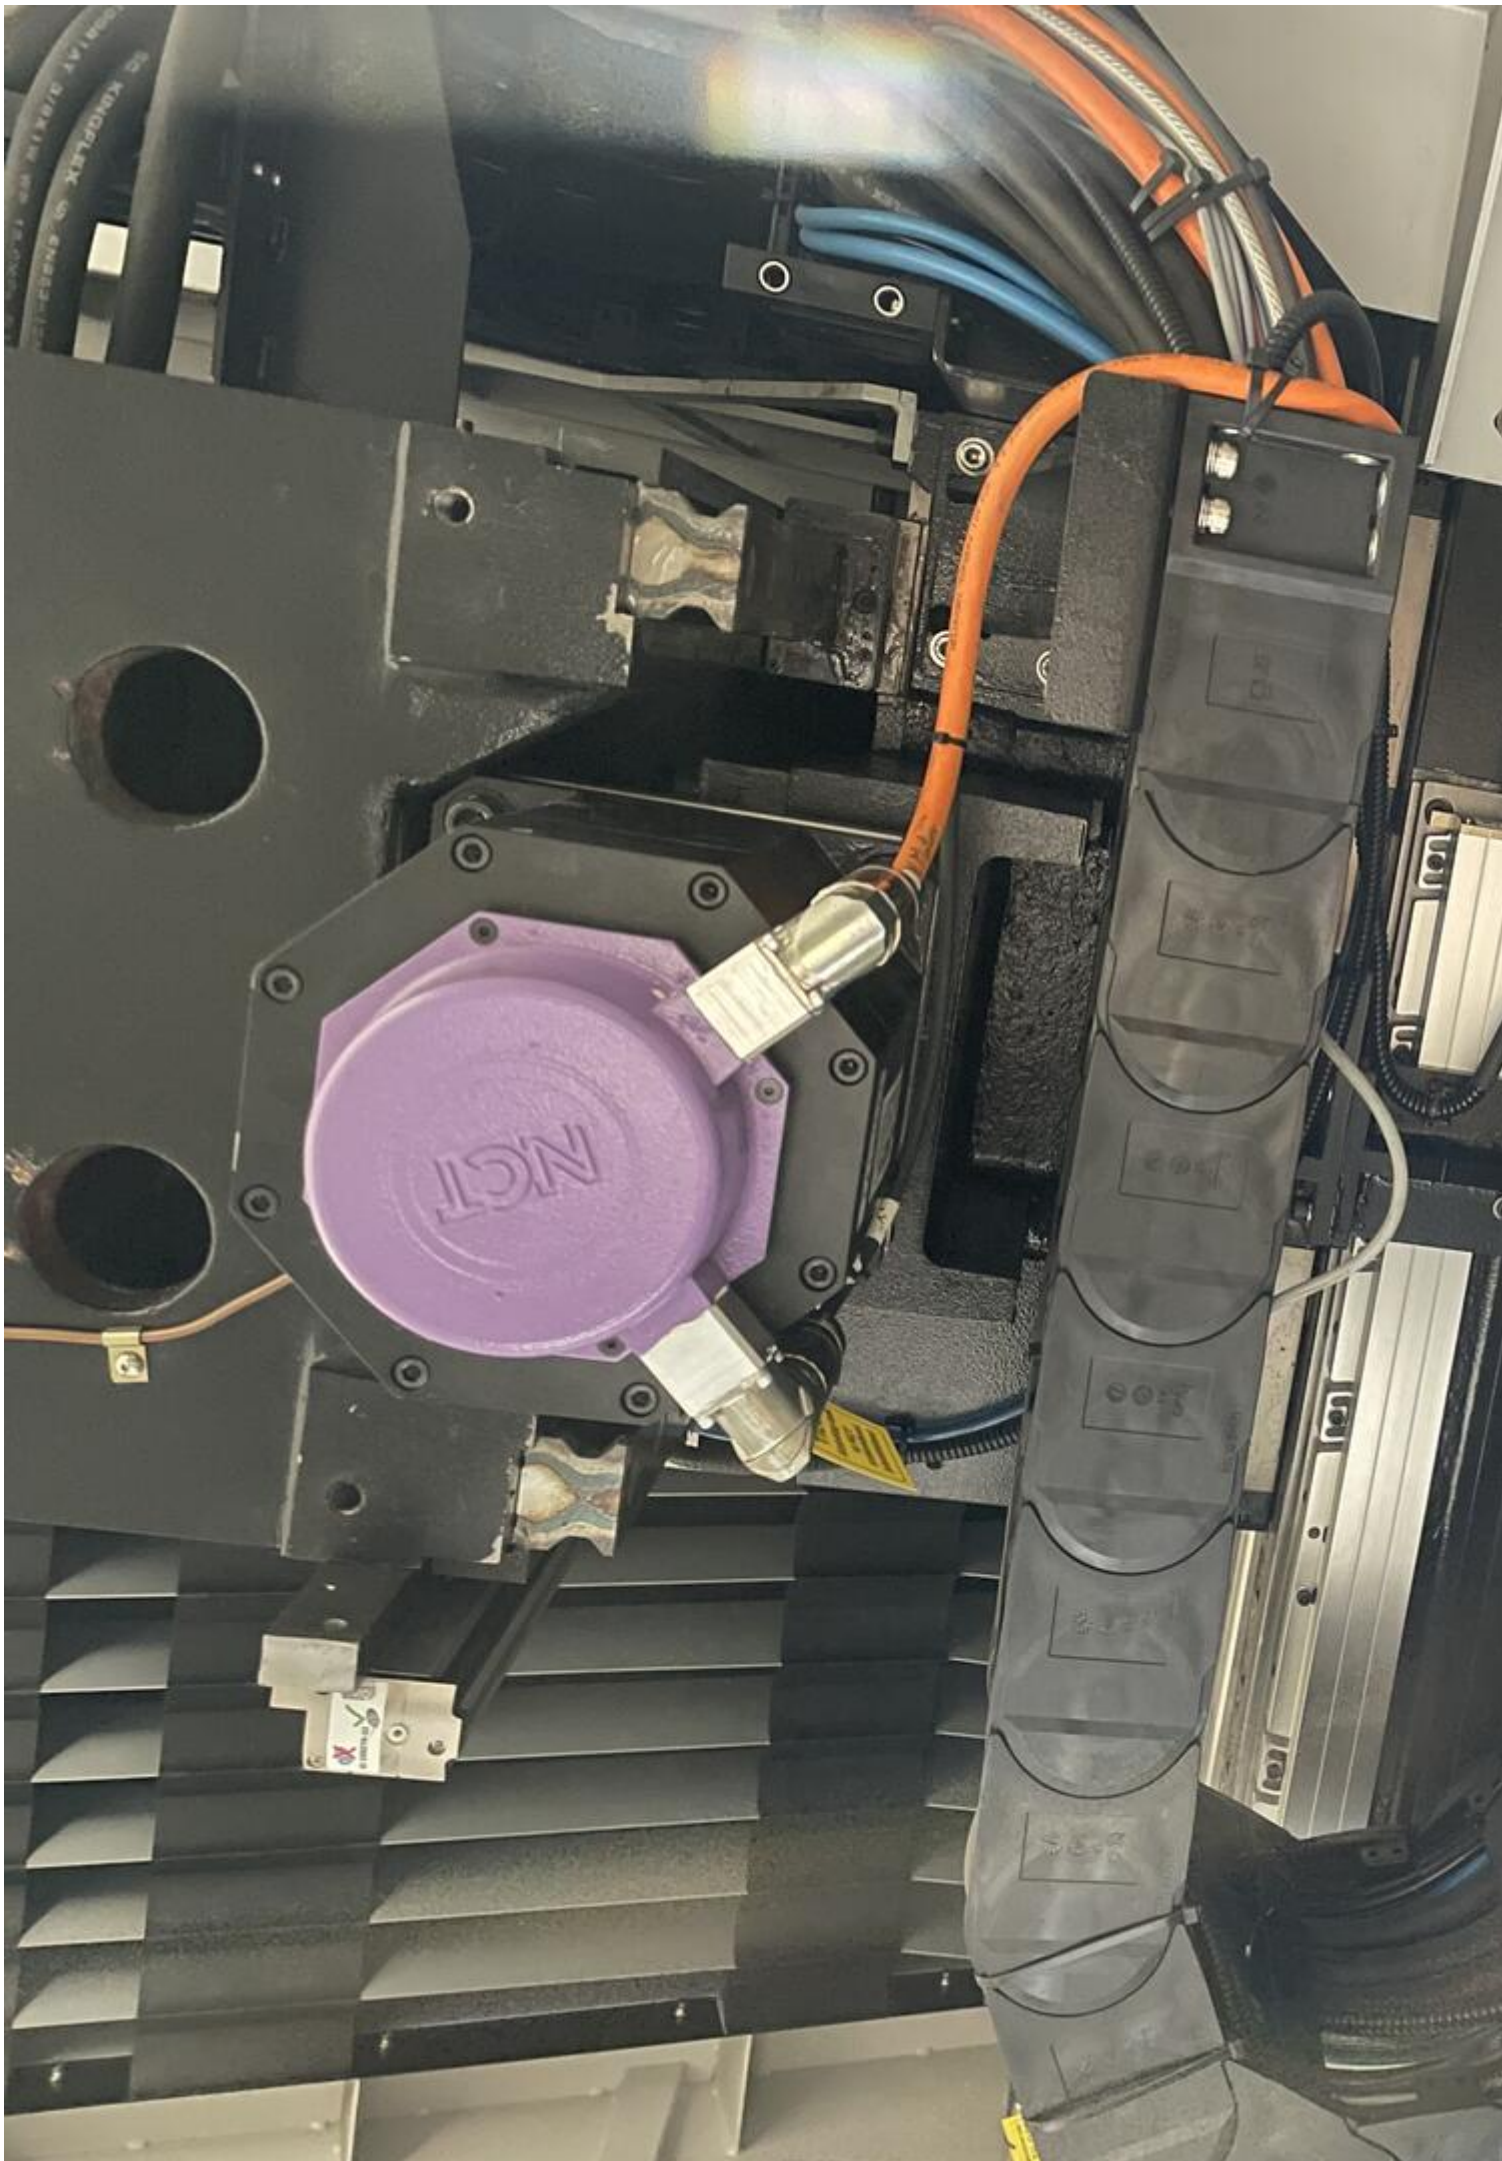



¡ATENCIÓN!
No tocar para evitar quemaduras



CE
NCT
LAPTOP (120V AC) 120V AC 1500W
120V AC 1500W
120V AC 1500W
120V AC 1500W



INFORMACIÓN
Consulte las pautas
de seguridad en el
manual de instrucciones.
Evite tocar las partes
calientes.







R407C

HABOP
No. B-MF-6D22W
C
RECYCLED
MADE IN TAIWAN
energy

HABOP
No. B-MF-6D22W
C
RECYCLED
MADE IN TAIWAN
energy

PC
C
Energy





Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33

Fax.: +49 2151 65 29 22

Email: info@asset-trade.de

Web.: <https://mail.asset-trade.de/en>

Generated on 20.04.2026

© Copyright 2026 - [Asset-Trade](#)

Page