

Ref. No.: 1425-06201700

Overview and Technical Data:

Used ULMER SF40 REINECKER End profile grinding machine

ULMER



Year of Build: Jan 2018





Description:

Buy used ULMER SF40 REINECKER | CNC end machining machine

If you are looking for a REINECKER end machining machine for the precise machining of cylindrical tools, then the used ULMER SF40 REINECKER is the ideal choice. Buying this end machining machine means investing in a powerful and reliable machine that efficiently handles a wide range of tool machining tasks. Whether for solid carbide, HSS or ceramics – the ULMER SF40 enables the machining of tips, chamfers and radii with the highest precision.

Technical data:

- Travel paths:
 - X-axis 450 mm
 - Z-axis 250 mm
- Resolution:
 - X, Z-axis: 0.001 mm
 - C-axis: 0.001°
- Rapid traverse X / Z: 15 / 30 m/min.
- Grinding spindle:
 - Motor spindle ø x length: 140 x 300 mm
 - Drive power S6: 14 kW / 170 Hz
 - Speed ??continuously variable: 1,000 to 7,500 min-1 / 250 Hz
 - Torque const.: 27 Nm to 5,000 min-1
 - Grinding wheel ø max.: 350 mm
 - Cutting speed: <140 m/s
- Workpiece spindle (C-axis):
 - Mounting taper: SK50
 - Speed ??max.: 3,000 min-1
 - Max. torque: 28 Nm
- Dimensions WxDxH: 1,900 x 1,900 x 1,900 mm
- Accessories:
 - Control and software NUMROTO Plus cylindrical grinding, loader, in-process measuring
 - Probe for process-related measuring, including touch cycles
 - 3D collision monitoring
 - Interpolating C-axis



- Balancing system for grinding wheel in the machine
- Automatic chain loader
- Automatic bar feed
- Coolant pressure increase
- Oil pan
- K&B fire extinguishing system including fire damper
- Connections for central coolant supply and oil mist extraction
- Collet chuck W20 UP
- Hydro expansion chuck Schunk
- General:
 - The machine is functional, in very good condition and can be inspected by appointment.

The ULMER end machining machine SF 40 REINECKER stands for:

- Creation of tips, chamfers, radii and their combination at the ends of cylindrical tools made of solid carbide, HSS and ceramic.
- Grinding unit with a liquid-cooled motor spindle.
- Variable spindle arrangement of the grinding unit for more flexibility, parallel or vertical.
- Up to four different grinding wheels can be mounted on one holder.
- Use of different chuck clamping systems.
- Measuring probe for recording the axial workpiece position and angular position of the cooling channels.
- Automatic loading devices are available as an option.
- NUM Flexium+ CNC control with powerful NUM DriveX drives and integrated NUM-Safe safety architecture.

Special features:

- The ULMER SF40 REINECKER is a high-precision tool grinding machine that offers high machining quality thanks to its powerful motor spindle and flexible spindle arrangement.
- With the option of mounting up to four different grinding wheels on one holder,



Technical Data:

Technical Data:

Control: CNC

Dimensions and Weight:

Height: 1.900 mm Length: 1.900 mm Width: 1.900 mm Weight: 4.000 kg

Buyer Information:

Condition: Very good condition Available: Sold Sold as: EXW (Ex Works - Incoterm) VAT: 19 % Buyers Premium: 18 % Location: Germany




Images:
















































Video:

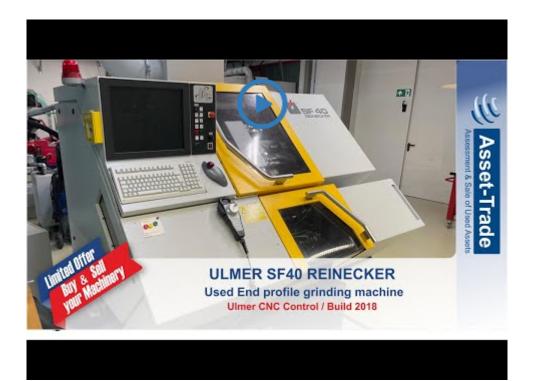











Asset-Trade

Assessment and Sale of Used Assets world wide

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33